

BUILDING AUTOMATION
CONTROL TECHNOLOGY
SENSOR TECHNOLOGY

alre



PRODUCT CATALOGUE 2020

Smart solutions
for smart people.

CERTIFICAT

CERTIFICADO

СЕРТИФИКАТ

認證證書

CERTIFICATE

ZERTIFIKAT



Management Service

CERTIFICATE

The Certification Body
of TÜV SÜD Management Service GmbH
certifies that

alre

ALRE-IT Regeltechnik GmbH
Richard-Tauber-Damm 10
12277 Berlin
Germany

has established and applies
a Quality Management System for

**Design, production and sales of
electromechanical and electric controls
for heating, cooling and
air conditioning technology.**

An audit was performed, Report No. **707075483**.

Proof has been furnished that the requirements
according to

ISO 9001:2015

are fulfilled.

The certificate is valid from **2018-07-05** until **2021-07-03**.

Certificate Registration No.: **12 100 55966 TMS**.

M. Wegner

Product Compliance Management
Munich, 2018-06-13



MS/01-03/2018



ALRE-IT Regeltechnik GmbH

Your reliable partner.

We have been in the business of producing high-quality control technology for over 50 years. We are very proud of this as it shows that we know how to fulfil both your expectations as well as our own. We are a German owner-operated business based in Berlin – which is also where we also manufacture our quality products.

We are quick to recognise new trends and respond with innovative products, combining state-of-the-art technology with decades of expertise. We develop and produce components and systems for operating, controlling and automating heating and air conditioning systems and industrial equipment.

Flawless customer service and top-of-the-line quality are key to our business, and we have held ISO 9001 certification since 1994 to prove it.

This 2020 product catalogue provides you with information about our wide range of products.

We are looking forward to continuing our successful business partnership.

Our satisfied customers High-quality solutions for every area

ALRE-IT Regeltechnik GmbH products offer numerous solutions for many applications. Whether it's a residential property, hotel or public facilities – alre controllers provide you with optimal climate control for any room. For over 50 years we have met the requirements of our customers and manufactured professional and high-quality control technology in Berlin. Our expertise and high quality standards are also reflected in the many projects we have successfully completed in the past.

Georgenhof, Dörnberg Quarter, Regensburg, Germany
The construction project comprises a city quarter with 1,300 apartments.



**St. George's The British International School,
Cologne, Germany**



**DATEV Location I
Paumgartnerstrasse, Nuremberg, Germany**



Hotel Park Inn by Radisson, Alexanderplatz, Berlin, Germany

© Radisson Hotel Group

FRIENDS Towers, Munich, Germany
The modern skyscrapers offer space for 130 apartments



© LBBW Immobilien

DATEV Standort III Sigmundstrasse, Nuremberg, Germany



© DATEV eG

Discover our new products

NEW



SMARTHOME/WIRELESS

Our b@home system is now even smarter. The b@home contact sensor now extends our range and offers you even more comfort.

See page 24 for more information



BUILDING AUTOMATION

Control buildings sustainably and efficiently with the new BACnet individual room controller from alre. The controller covers a wide range of applications for building automation.


See page 42 onwards for more information



HEATING TECHNOLOGY

The new bimetal controller from alre offers a number of advantages. New terminals enable fast and convenient connection without screws. This will save you time, and above all, costs.

See page 74 onwards for more information



HEATING TECHNOLOGY

The optimised terminal strip allows you to wire actuators clearly and conveniently. Screwless spring terminals, labelling fields or integrated strain relief simplify installation enormously.

See page 107 onwards for more information



PLANT ENGINEERING

Our new thermostats for plant engineering are now available in a modern design. They are suitable for optimum temperature control in various fields such as greenhouses, warehouses and industrial halls.

See page 154 onwards for more information



Smarthome / Wireless

Overview of devices	12
System information	13–19
Individual components	20–35
At a glance	36

Building automation

General information	40–49
BACnet room controller	50–54
Adaptation	55

Heating technology

Overview of devices	60
Room/underfloor temperature controllers, surface-mounted, flush-mounted, clock controllers	61–105
Valve actuators/terminal strips for heating circuit distributors	106–109

Air conditioning technology

Overview of devices	114
Climate controllers (including for EC fans)	115–134
Dew point monitoring	135–137
Hygrostats/hygro-thermostats	138–140
Terminal strips for heating manifolds/valve actuators	141–144

Plant engineering

Overview of devices	148–153
Capillary/frost/control cabinet thermostats	154–183
Mechanical temperature controllers	184–186
Flow and pressure monitoring, hygrostats	187–196

Sensor technology


Temperature	200–211
Differential pressure	212

Accessories/miscellaneous/sauna controllers

Sauna controllers	216–217
Accessories	218–223
Technical annex/type comparison (old/new) Ecodesign Directive/funding opportunities	222–231
Index	232–237
General information/contact/addresses	238–240

SMARTHOME/ WIRELESS

Smarthome/
Wireless

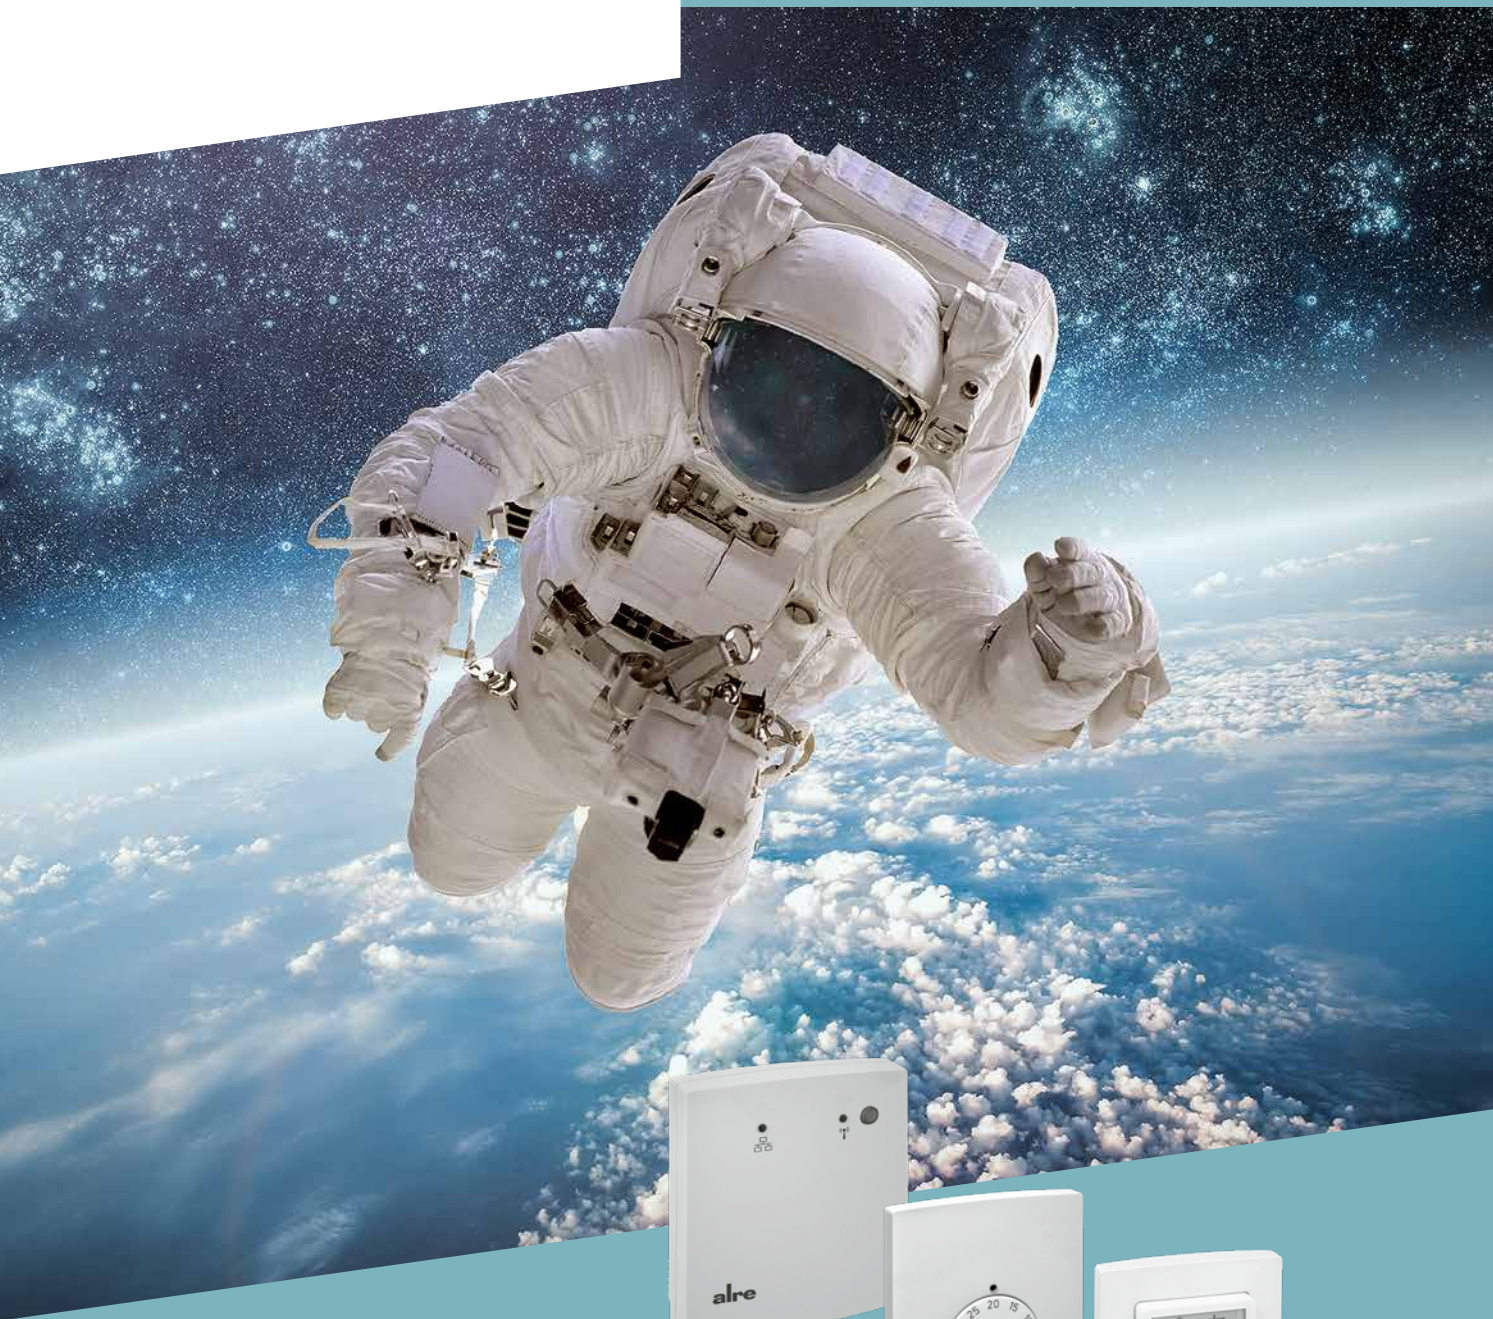

For optimal room ambience



SMARTHOME / WIRELESS

Intelligent solutions for your room temperature control.


Rooms with a comfortable climate need perfect control technology. Whether it's an flat, an office building or a hotel room, with b@home, alre offers the smart solution for controlling heating and cooling intelligently. b@home can be retrofitted into existing wireless systems from alre, and can be used for all types of heating.

Your b@home system is simple to install, and you can control it on the move, via the Internet or locally via your home network. It's simple to use, monitoring and program, any time and anywhere, providing maximum comfort and optimal energy consumption. And with the sensors and actuators, individual room control can also be implemented without the b@home gate if required.

b@home - Intelligent solutions for intelligent buildings.




Application examples:

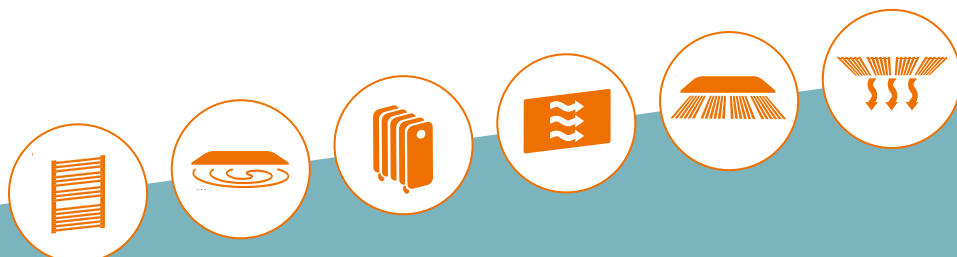- Hot water underfloor heating
- Hot water radiators
- Electric underfloor heating
- Mobile radiators
- Infrared heaters (e.g. natural stone heaters)







SMARTHOME/WIRELESS overview:


System information

	Overview of devices	12
	Smart control with b@home	13
	System overview	14–15
	System configurator for a remotely administered control system controllable via app or browser	16–17
	System configurator for a non-remote control system	18–19



Individual components

	Central components	20–21
	Sensors/repeaters	22–27
	Heating actuators	28–32
	Heating/cooling actuators	34–35

At a glance

	Advantages/scalability/further information	36
---	--	----

Product innovation

	<p>Our b@home system is now even smarter. The b@home contact sensor now extends our range and offers you even more comfort.</p> <p>See page 24 for more information</p>	
---	--	---

Smarthome / Wireless overview of components

Type		FTRFB-280.101	FTRFB-280.119	FTRFB-280.120	FTRFBu-180.117/V2	FTRFBu-180.121/V2	FTRFUd 210.123#xx	HTFMA-180.161	HTFRB-010.101	HTFRA-010.101	HTFRU-010.101	HTFRU-110.124	HTFRL-214.140	HTFRL-316.125	KTFRL-213.140	KTFRL-315.125	MGCBB-064.360 (b@home system only)	FTRCUd 210.021#xx (b@home system only)	MBAFA-081.200 (b@home system only)	MRCOA-014.201
Page		22	22	23	23	23	23/24	28	29	28	29	29	30	30	34	34	20	20/21	24	25
Control-function	Heating	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x		
	Cooling	x	x	x	x	x	x								x	x	x	x		
Application	Radiator	x	x	x	x	x	x	x									x	x		
	Hot water floor heating	x	x	x	x	x	x		x	x	x	x	x	x	x	x	x	x		
	Electric underfloor heating	x	x	x	x	x	x		x	x	x	x					x	x		
	Infrared heaters	x	x	x	x	x	x		x	x	x						x	x		
	Cooling ceiling	x	x	x	x	x	x									x	x	x	x	
	Mobile radiators									x										
Sensor	NTC, internal	x	x	x	x	x	x											x		
	External NTC (optional)						x											x		
	External NTC for floor control and/or floor monitoring (optional)											x								
	Flow sensor (optional)																		x	
	Dew point sensor (optional)														x	x			x	
Features	"ECO" input														x	x			x	x
	"Changeover - heating/cooling" input														x	x			x	
	"Off with frost protection monitoring" input														x	x			x	
	Central control	x	x	x	x	x	x		x	x	x	x			x	x				
	External antenna can be connected												x	x	x	x				
Mounting/attachment	Surface/wall-mounted	x	x	x	x	x		x				x	x	x	x	x	x		x	
	Flush-mounted						x				x	x							x	
	Plug-in (Schuko)									x										x
	M30x1.5 (adapter for Danfoss RA, RAV, RAVL included)							x												
Connectivity of individual components	FTRFB-280.101							x	x	x	x	x	x	x	x	x	x			x
	FTRFB-280.119							x	x	x	x	x	x	x	x	x	x			x
	FTRFB-280.120							x	x	x	x	x	x	x	x	x	x			x
	FTRFBu-180.117/V2							x	x	x	x	x	x	x	x	x				x
	FTRFBu-180.121/V2							x	x	x	x	x	x	x	x	x				x
	FTRFUd 210.123#xx							x	x	x	x	x	x	x	x	x				x
	FTRCUd 210.021#xx																x			
	MBAFA-081.200																x			
	MRCOA-014.201	x	x	x	x	x	x		x	x	x	x	x	x	x	x	x			

NEW

Smart control with b@home

Intelligent remote control for heating and cooling systems

Smart controls for smart people

With the b@home system from alre, you can control and monitor your heating and cooling system at any time, from anywhere. Whether you prefer to use your smartphone/the tablet app or your web browser, rooms can be accessed individually or centrally using the intuitive and simple interface. And you can easily control the b@home system remotely, using your home network or, if you are not at home, mobile Internet. Being able to operate the system in a way that suits you not only offers the highest gain in comfort, but also optimises energy consumption.



The b@home gate (MGCBB-064.360) is the central component of the b@home system and the interface between the alre wireless system and the WLAN/LAN router. It can also be retrofitted into existing wireless systems from alre. The optional b@home control panel (FTRCUd 210.021) provides central access to the settings for all channels or heating/cooling zones. It can be used as a central control unit or as a room control unit, and can be integrated into all common switch ranges.


The apps are free of charge and there are no follow-up costs. And thanks to our attention to detail the b@home system is quick and easy to install and set up.

Smart control at home without the Internet



Control and monitoring of heating/cooling in the home network via LAN/WLAN (no Internet connection required)

The b@home system can be conveniently operated and programmed in the home network via a suitable end device (app) even without an Internet connection. The data and configuration parameters are only stored locally in the b@home gate. The system can also be controlled independently of a smartphone or tablet at any time with the optional b@home control panel.



Smart control from anywhere via the Internet



Control and monitoring of heating/cooling at any time and anywhere via the Internet

After registration on the b@home portal, the b@home system can be operated and programmed at any time and anywhere via the Internet. And even if the Internet connection is interrupted, the control function will still work. This means you can still control the home network. Of course, data and configuration parameters are neither processed nor passed on to third parties.

Bathroom

Kitchen

Suitable for all heating systems



Infrared heaters



Cooling ceiling



Mobile radiator

System configurator for a remote control system via app or browser

1 Selection of central components

A minimal system consists of the central b@home gate component and at least one sensor and one actuator. With a b@home gate, up to 32 rooms or heating/cooling zones can be monitored and controlled. Further b@home gates can be operated in the same network if required.



b@home gate
MGCB-064.360

Optional

Using the optional central control panel, the settings of the individual rooms can be displayed and, in some cases, changed independently of the app or browser. The control unit has a contact/sensor input for central control (all rooms) of the b@home gate. A maximum of 1 central control unit can be taught to work with a b@home gate.



FTRCUd 210.021#xx
(various variants for optimum integration in almost all switch ranges)

2 Selection of sensors

One sensor per room is required to measure the room temperature. Depending on the selected sensor, further functions may be available.

Sensor to detect room temperature

(The room temperature is set via app or browser).



FTRFB-280.101

Room controller to detect and set room temperature

(Room temperature can also be changed via app or browser). You can use the room control panel to display and, in some cases, change settings for other rooms, including independently of the app or browser. A contact/sensor input for influencing the assigned room is available. Room control panels can be assigned for up to 16 rooms using a b@home gate.



FTRCUd 210.021#xx
(various variants for optimum integration in almost all switch ranges)

Sensor to detect and set room temperature

(It is possible to enable setting the room temperature using an app or browser instead of using the setpoint adjuster).



FTRFB-280.119

Optional

Up to 7 additional sensors per room to detect the room temperature (for finding averages, e.g. in large rooms).



FTRFB-280.101

Optional

Up to 10 contact sensors for detection of open windows/doors per room. A contact sensor can be assigned to any number of rooms.

MBAFA-081.200



3 Selection of actuators

Depending on the type of heating used, a corresponding actuator is required for each room or heating/cooling zone. Any number of actuators/channels can be assigned to a room.

Hot water underfloor heating



e.g.
HTFRL-214.140
(4-channel)
HTFRL-316.125
(8-channel)

Hot water radiators



e.g.
HTFMA-180.161

Electrical underfloor heating



e.g.
HTFRU-110.124
(optional external
floor sensor available)

Mobile radiators



e.g.
HTFRA-010.101

Infra-red heaters



e.g.
HTFRU-010.101

Cooling ceiling



e.g.
KTFRL-213.140
(4-channel)
KTRFL-315.125
(8-channel)

Optional

In difficult reception conditions, the MRCOA-014.201 plug-in wireless repeater can be used to increase the range of sensors/actuators in conjunction with the b@home gate (except FTFCUd 210.021 and HTFMA-180.161).

If required, an external antenna (JZ-25) can be connected to the multi-channel actuators intended for installation in heating manifolds via a 1m antenna cable (JZ-26).

System configuration for a non-remote wireless control system

1 Selection of sensors

A minimal system consists of at least one sensor and one actuator. These are directly connected to each other without a central component. Different control functions can be implemented by combining the different sensor types. It is possible to teach any number of actuators to work with the sensors.

■ Individual room control

In each room there is a sensor to detect and set the room temperature. Depending on the selected sensor, further functions may be available.



or



FTRFB-280.120
(ECO switch for manual energy-saving operation)

FTRFB-280.119

■ Individual room control with individual clock program

In each room there is a sensor with a clock to detect and set the room temperature. An individual clock programme can therefore be set up for each room.



or



FTRFud 210.123#xx
(various variants for optimum integration in almost all switch ranges)

FTRFBu-180.1xx

■ Individual room control with central clock program (master-slave)

In one room there is a sensor with a clock to detect and set the room temperature, as well as to set up the central clock program. In the other rooms (any number) there is a sensor to detect and set the room temperature. The clock program set centrally affects all rooms (any number, depending on the wireless range).

Sensor with clock to detect and set the room temperature and set up the central clock programme



or



FTRFud 210.123#xx
(various variants for optimum integration in almost all switch ranges)

FTRFBu-180.1xx



Sensor to detect and set room temperature



or



FTRFB-280.120
(ECO switch for manual energy-saving operation)

FTRFB-280.119

■ **Central control**
Individual room control with central temperature setting

One FTRFB-280.101 sensor is required per room (any number) to detect the room temperature. Furthermore, a sensor is required to set the room temperature centrally. The room temperature set centrally applies to all rooms.

Sensor for centrally setting room temperature



FTRFB-280.119 FTRFB-280.120 FTRFBu-180.1xx FTRFUd 210.123#xx



Sensor to detect room temperature



FTRFB-280.101

Finding averages

Up to 7 additional FTRFB-280.101 sensors can be used per room for finding averages (for example in large rooms). This is possible with all listed control functions.



FTRFB-280.101

② Selection of actuators

Depending on the type of heating used, a corresponding actuator is required for each room or heating/cooling zone. Any number of actuators/channels can be assigned to a room.

Hot water underfloor heating



e.g.
HTFRL-214.140
(4-channel)
HTFRL-316.125
(8-channel)

Hot water radiators



e.g.
HTFMA-180.161

Electrical underfloor heating



e.g.
HTFRU-110.124
(optional external floor sensor available)

Mobile radiators



e.g.
HTFRA-010.101

Infra-red heaters



e.g.
HTFRU-010.101

Cooling ceiling



e.g.
KTFRL-213.140
(4-channel)
KTRFL-315.125
(8-channel)

Optional

In difficult reception conditions, the MRCOA-014.201 plug-in wireless repeater can be used to increase the range of sensors/actuators (except HTFMA-180.161).

If required, an external antenna (JZ-25) can be connected to the multi-channel actuators intended for installation in heating manifolds via a 1m antenna cable (JZ-26).



Technical data



Ambient temperature: 0...40 °C
Storage temperature: -20...+70 °C
Permissible atmospheric humidity: max. 95% relative humidity, non-condensing
Protection rating: IP 30
Safety and EMC: according to DIN EN 60730 and DIN EN 300220
Radio frequency: 868.3 MHz
Range: 150 m line-of-sight or up to 30 m in buildings, depending on the construction


Application

alre wireless systems can be monitored and controlled over the Internet or WLAN/LAN using the new b@home gate MGCBB-064.360. After completing the free registration process at the b@home portal, users can operate the b@home system simply and intuitively via a smartphone app or a laptop/PC. This allows users to control, monitor and reprogram the temperature controls at any time and from any location, either for each individual room or centrally for all rooms. It is also possible to access the system without an Internet connection using the local WLAN/LAN network.





The b@home control unit FTRCUD 210.021 in conjunction with the b@home gate MGCBB-064.360 provides central access to the settings for further channels and can be used as a central control unit or room control unit. Changes made using the b@home app or via PC/notebook are shown in the graphic display.



It can be retrofitted to existing alre wireless installations (except wireless room temperature sensors with FTRFBu and FTRFUD clock).

Type/image	Item no.	Features	PG
 <p>MGCBB-064.360</p>	BA210101	<p>Wireless room temperature management system, controlled remotely via the Internet or smartphone Design: Berlin 2000 Surface finish: matt Housing colour: pure white, like RAL 9010 Housing material: ABS plastic Operating voltage: +5 VDC Mounting/attachment: Direct surface/wall-mounting by means of screws Protection class: III Operating elements: confirmation button Scope of delivery: b@home gate, network cable (CAT5)/cable length 3 m, MicroUSB power supply plug/cable length 1.8 m</p>	I
 <p>FTRCUD 210.021#21</p>	UA070000	<p>Wireless room temperature sensor to detect and set the room temperature, control unit for additional active channels, sensor/contact input for central control of the b@home gate General features: Time/temperature display; automatic/comfort/ECO operating mode display; external input for ECO contact or OFF contact or external room sensor or flow sensor for H/C changeover or H/C changeover contact or dew point sensor; automatic adjustment to summer/winter time; power reserve (approx. 3 days); backlight; measured value correction; child lock; operation using direct-dial buttons. Design: Berlin UP Surface finish: glossy Housing colour: pure white, similar to RAL 9010 Housing material: Plastic ABS, PC, PMMA Operating voltage: 230 V AC, 50 Hz Electrical connection: pluggable screw terminals Mounting/attachment: in flush-mounted socket (deep flush-mounted socket recommended); can be adapted to fit virtually any surface switch range, see adaptation list on page 27 Protection class: II, if properly mounted Average power consumption: <1 W Sensors: Internal NTC, optional external ("Sensor 2") Control range: 5...30 °C Transmission interval: Approx. 3 min and after setpoint change Display type: backlit graphic display Display: set/actual temperature, date, time; set/actual temperature or date, time Scope of delivery: wireless sensor, cover 50 x 50 mm pure white (similar to RAL 9010), glossy, alre frame "Berlin"</p>	I



Smarthome / Wireless – CENTRAL COMPONENTS

Type/image	Item no.	Features	PG
	UA070001	like FTRCUd 210.021#21 but scope of delivery as follows: Wireless room temperature sensor, cover 50 x 50 mm pure white (similar to RAL 9010), glossy , without frame	I 
	UA070002	like FTRCUd 210.021#21 but scope of delivery as follows: Wireless room temperature sensor, cover 50 x 50 mm pearl white (similar to RAL 1013), glossy , without frame	I 
	UA070003	like FTRCUd 210.021#21 but scope of delivery as follows: Wireless room temperature sensor, cover 50 x 50 mm traffic white (similar to RAL 9016), glossy , without frame	I 
	UA070006	like FTRCUd 210.021#21 but scope of delivery as follows: Wireless room temperature sensor, cover suitable for BUSCH-JAEGER Reflex SI/ SI Linear pure white (similar to RAL 9010), glossy , without frame	I 
	UA070004	like FTRCUd 210.021#21 but scope of delivery as follows: Wireless room temperature sensor, cover 55 x 55 mm pure white (similar to RAL 9010), glossy , without frame	I 
	UA070008	like FTRCUd 210.021#21 but scope of delivery as follows: Wireless room temperature sensor, cover 55 x 55 mm pure white (similar to RAL 9010), mat , without frame	I 
	UA070005	like FTRCUd 210.021#21 but scope of delivery as follows: Wireless room temperature sensor, cover 55 x 55 mm pearl white (similar to RAL 1013), glossy , without frame	I 
	UA070007	like FTRCUd 210.021#21 but scope of delivery as follows: Wireless room temperature sensor, cover 55 x 55 mm traffic white (similar to RAL 9016), glossy , without frame	I 

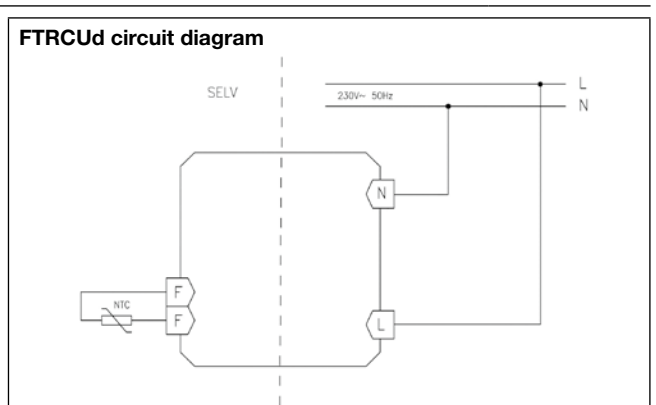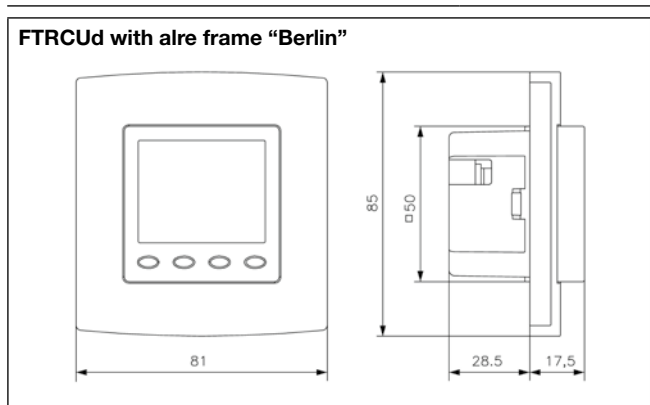



Technical data

Permissible atmospheric humidity: max. 95% rel. humidity, non-condensing
Protection rating: IP 30
Safety and EMC: according to DIN EN 60730 and DIN EN 300220
Radio frequency: 868.3 MHz
Range: 150 m line-of-sight or up to 30 m in buildings, depending on the construction
Transmission interval: approx. 3 min and after setpoint change

Application

Wireless room temperature sensor for measuring temperature in home, office and hotel rooms with normal levels of cleanliness. Single-room temperature control can be implemented with alre wireless actuators and the b@home gate. Primarily used for renovations or for heating system extensions.

 The sensors can also be connected to the actuators directly without the b@home gate to implement single-room control.





Battery change: The sensor indicates if a battery change is required soon.

 The wireless connection is restored automatically after a voltage interruption at the sensor or actuator.














Type/image	Item no.	Features	PG
<p>FTRFB-280.101</p> <p>only 13.9 mm deep</p>	BA010400	<p>General features: Wireless room temperature sensor to detect the room temperature for calculating the average value or for centralised control; "learning mode/battery discharge state" display Design: Berlin 1000 Surface finish: glossy Housing colour: pure white, like RAL 9010 Housing material: ABS plastic Operating voltage: 2x micro AAA batteries, 1.5 V Ambient temperature: -10...+50 °C Storage temperature: -10...+50 °C Mounting/attachment: Direct surface/wall mounting by means of screws or adhesive pads Protection class: III Sensor: Internal NTC Scope of delivery: device, batteries, adhesive pads Operating elements: Learn button</p>	I
<p>FTRFB-280.119</p> <p>only 13.9 mm deep</p>	BA010409	<p>General features: Wireless room temperature sensor to detect and set room temperature; "learning mode/battery discharge state" display; mechanical range restriction; scale: degrees Celsius; external setting Design: Berlin 1000 Surface finish: glossy Housing colour: pure white, like RAL 9010 Housing material: ABS plastic Operating voltage: 2x micro AAA batteries, 1.5 V Ambient temperature: -10...+50 °C Storage temperature: -10...+50 °C Mounting/attachment: Direct surface/wall mounting by means of screws or adhesive pads Protection class: III Sensor: NTC, internal Setting range: 5...30 °C Scope of delivery: device, batteries, adhesive pads Operating elements: Learn button</p>	I







SmartHome/Wireless – SENSORS/REPEATERS

Type/image	Item no.	Features	PG
 <p>only 13.9 mm deep</p>	BA010401	<p>General features: Wireless room temperature sensor to detect and set room temperature; reduction 4 K fixed; ECO function; “learning mode/battery discharge state” display; mechanical range restriction; scale: degrees Celsius; external setting</p> <p>Design: Berlin 1000</p> <p>Surface finish: glossy</p> <p>Housing colour: pure white, like RAL 9010</p> <p>Housing material: ABS plastic</p> <p>Operating voltage: 2x micro AAA batteries, 1.5 V, 1,100 mAh</p> <p>Ambient temperature: –10 ... +50 °C</p> <p>Storage temperature: –10 ... +50 °C</p> <p>Mounting/attachment: Direct surface/wall mounting by means of screws or adhesive pads</p> <p>Protection class: III</p> <p>Sensor: NTC, internal</p> <p>Setting range: 5 ... 30 °C</p> <p>Scope of delivery: device, batteries, adhesive pads</p> <p>Operating elements: “Comfort/ECO” switch, learn button</p>	I
	BA010200	<p>General features: Wireless room temperature sensor to detect and set the room temperature with clock pilot function; ECO function, ECO value adjustable; “ECO” display; “on/off” display; “learning mode/battery discharged state” display; digital actual value display; child-safe features; actual value correction/measured value correction; learning function; valve protection; holiday setting; party setting; automatic adjustment to summer/winter time; mechanical range setting; scale: degrees Celsius; reduction/comfort/automatic button; external setting; operation using direct-dial buttons; on/off button; information button; party function button; holiday setting button; master-slave operation; “heating”, “cooling” or “heating and cooling” mode</p> <p>Design: Berlin 3000</p> <p>Surface finish: matt</p> <p>Housing colour: pure white, like RAL 9010</p> <p>Housing material: ABS plastic</p> <p>Operating voltage: 2x micro AAA batteries, 1.5 V, 1,100 mAh</p> <p>Ambient temperature: –10 ... 50 °C</p> <p>Storage temperature: –10 ... +50 °C</p> <p>Mounting/attachment: Direct surface/wall mounting by means of screws or adhesive pads</p> <p>Protection class: III</p> <p>Sensor: NTC, internal</p> <p>Setting range: 5 ... 30 °C</p> <p>Display type: symbol display</p> <p>Scope of delivery: device, batteries, adhesive pads</p> <p>Accessories: optional adapter snap-on plate JZ-18</p>	I
	BA010201	<p>like FTRFBu-180.117, but with backlighting</p> <p>Operating voltage: 3x micro AAA batteries, 1.5 V (third battery for backlighting)</p>	I
	UA080000	<p>General features: Flush-mounted wireless room temperature sensor to detect and set the room temperature with clock, holiday setting, party setting, different clock programs can be set for heating and cooling, usable as the master for master-slave operation (pilot controller); pilot function; ECO function; ECO value adjustable; “ECO” display; “on/off” display; digital actual value display; backlighting; child-safe features; power reserve (3 days); actual value correction/measured value correction; learning function; valve protection; holiday setting; party setting; automatic adjustment to summer/winter time; external setting; operation using direct-dial buttons</p> <p>Design: Berlin UP</p> <p>Surface finish: Glossy</p> <p>Housing colour: Pure white, similar to RAL 9010</p> <p>Housing material: Plastic ABS, PC, PMMA</p> <p>Operating voltage: 230 VAC, 50 Hz</p> <p>Ambient temperature: 0 ... 40 °C</p> <p>Storage temperature: –20 ... +70 °C</p> <p>Electrical connection: pluggable screw terminals</p> <p>Mounting: in flush-mounted socket (deep flush-mounted socket recommended); can be adapted to fit virtually any surface switch range, see adaptation list on page 27</p> <p>Protection class: II, if properly mounted</p> <p>Average power consumption: <1 W</p> <p>Sensor: NTC internal, optional external (selection option from 7 different sensors, e.g. “Sensor 2” / “Sensor 8”)</p> <p>Control range: 5 ... 30 °C</p> <p>Display type: Backlit graphic display</p> <p>Scope of delivery: Controller, cover 50 x 50 mm, pure white (similar to RAL 9010), glossy, alre frame “Berlin”</p>	I









Type/image	Item no.	Features	PG
	FTRFUd 210.123#07 UA080001	Like FTRFUd 210.123#21 but scope of delivery as follows: Wireless room temperature sensor, cover 50 x 50 mm pure white (similar to RAL 9010), glossy , without frame	
	FTRFUd 210.123#09 UA080002	Like FTRFUd 210.123#21 but scope of delivery as follows: Wireless room temperature sensor, cover 50 x 50 mm pearl white (similar to RAL 1013), glossy , without frame	
	FTRFUd 210.123#27 UA080003	Like FTRFUd 210.123#21 but scope of delivery as follows: Wireless room temperature sensor, cover 50 x 50 mm traffic white (similar to RAL 9016), glossy , without frame	
	FTRFUd 210.123#28 UA080006	Like FTRFUd 210.123#21 but scope of delivery as follows: Wireless room temperature sensor, cover suitable for BUSCH-JAEGER Reflex SI/SI Linear pure white (similar to RAL 9010), glossy , without frame	
	FTRFUd 210.123#55 UA080004	Like FTRFUd 210.123#21 but scope of delivery as follows: Wireless room temperature sensor, cover 55 x 55 mm pure white (similar to RAL 9010), glossy , without frame	
	FTRFUd 210.123#56 UA080008	Like FTRFUd 210.123#21 but scope of delivery as follows: Wireless room temperature sensor, cover 55 x 55 mm pure white (similar to RAL 9010), matt , without frame	
	FTRFUd 210.123#57 UA080005	Like FTRFUd 210.123#21 but scope of delivery as follows: Wireless room temperature sensor, cover 55 x 55 mm pearl white (similar to RAL 1013), glossy , without frame	
	FTRFUd 210.123#59 UA080007	Like FTRFUd 210.123#21 but scope of delivery as follows: Wireless room temperature sensor, cover 55 x 55 mm traffic white (similar to RAL 9016), glossy , without frame	
 	MBAFA-081.200 SA161001	<p>General features: Wireless door/window contact for the b@home system, automatic temperature reduction when open windows and doors are detected, "learning mode/battery discharged state/state change" display</p> <p>Surface finish: Glossy</p> <p>Housing colour: Pure white, similar to RAL 9010</p> <p>Housing material: ABS plastic</p> <p>Operating voltage: Lithium battery CR2477/BN 3V</p> <p>Ambient temperature: -10 ... +45 °C</p> <p>Storage temperature: -10 ... +45 °C</p> <p>Mounting/attachment: using adhesive tape on the window/window frame</p> <p>Protection class: III</p> <p>Sensors: Reed contact</p> <p>Scope of delivery: Device and magnet with adhesive tape, battery</p> <p>Operating elements: Learn button</p>	
			

Smarthome/Wireless – SENSORS/REPEATERS

Type/image	Item no.	Features	PG
	BA210200	<p>General features: Plug-in wireless repeater for direct range extension between wireless room temperature sensors and wireless heating controllers (actuators) of an alre wireless system as well as the b@home gate, built-in socket permanently operable with max. load 230V/16A, up to 16 sensors/channels teachable,</p> <p>Housing colour: pure white, like RAL 9010</p> <p>Housing material: ABS plastic</p> <p>Operating voltage: 230 V AC, 50 Hz</p> <p>Ambient temperature: 0... 40 °C</p> <p>Storage temperature: -20... +70 °C</p> <p>Electrical connection: Schuko adapters</p> <p>Protection rating: IP20</p> <p>Protection class: II for loads of protection classes I and II</p> <p>Operating elements: Learn button</p>	I
	MN990002	<p>General features: Optional adapter snap-action plate for wireless room temperature sensor FTRFBu with universal perforation pattern for mounting. The use of the adapter is recommended since the device becomes detachable as a result, which facilitates simpler battery replacement.</p> <p>Surface finish: matt</p> <p>Housing colour: pure white, like RAL 9010</p> <p>Housing material: ABS plastic</p>	II
	MN990006	<p>Adapter frame for mounting wireless sensors of the Berlin 1000 series in flush-mounted sockets up to 80 x 80 mm</p>	I
	VV000025	<p>General features: alre frame "Berlin" (neutral) for all flush-mounted room temperature sensors with cover 50 x 50 mm</p> <p>Surface finish: glossy</p> <p>Housing colour: pure white, similar to RAL 9010</p> <p>Housing material: PC plastic</p>	I
	VV000010	<p>General features: alre frame "Berlin" (neutral) for all flush-mounted room temperature sensors with cover 50 x 50 mm</p> <p>Surface finish: glossy</p> <p>Housing colour: pearl white, like RAL 1013</p> <p>Housing material: PC plastic</p>	I
	MA990000	<p>General features: Adjusting knob for B1000 series devices, Scale: Degrees Celsius, pure white glossy</p>	I



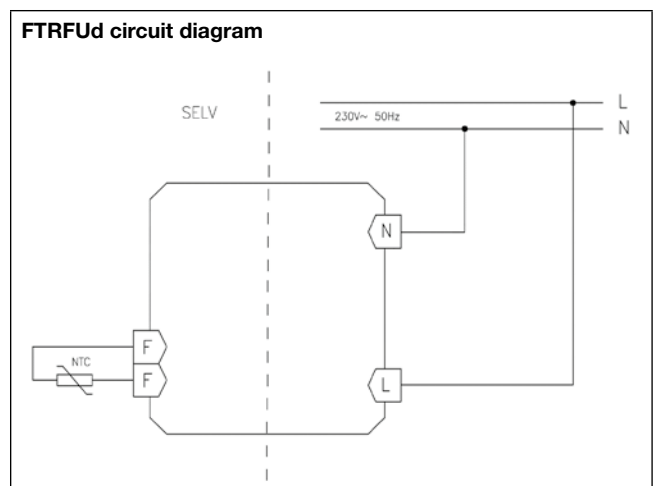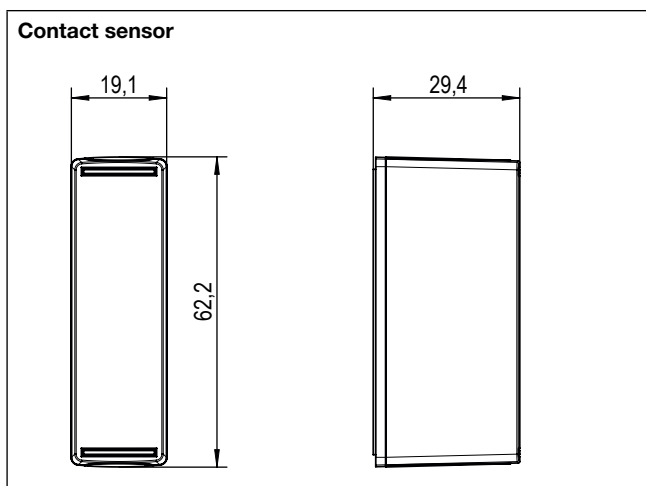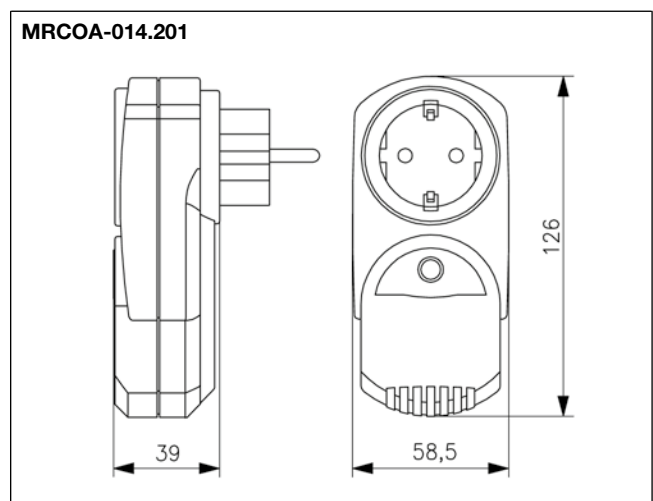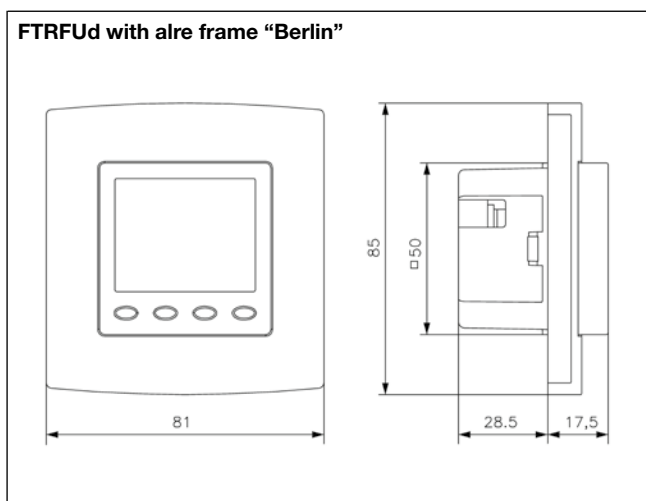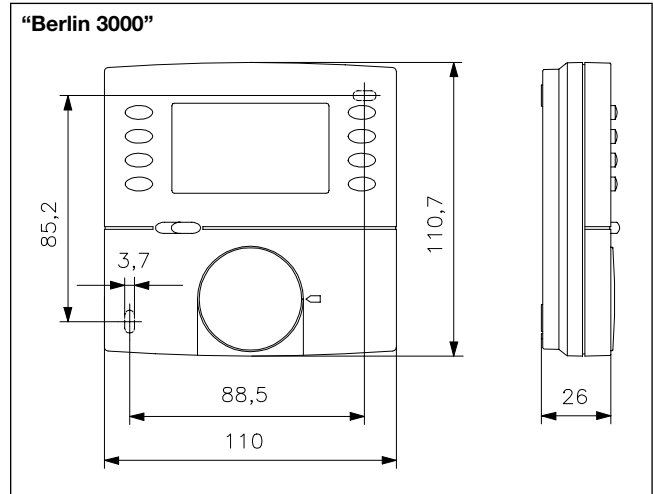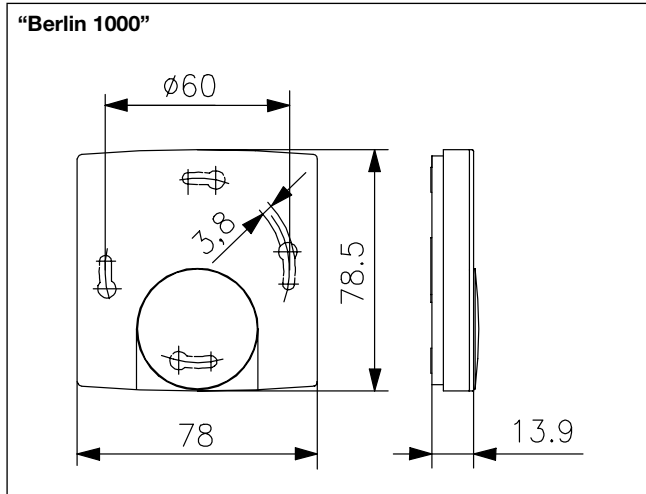

Adaptation of alre flush-mounted FTRxUd-210.021

Manufacturer	Range	Colour RAL 9010 (surface finish)	Adaptation in switch range "55 x 55" possible using ...	"50 x 50" adaptation possible with ... (insert frame from manufacturer required)
BERKER	S.1	polar white (matt)	FTRxUd-210.xxx#56	not required
BERKER	S.1	polar white (glossy)	FTRxUd-210.xxx#55	not required
BERKER	Arsys	polar white (glossy)		FTRxUd-210.xxx#07 + (1108 01 69)
BERKER	B.3	aluminium/polar white (matt)	FTRxUd-210.xxx#56	not required
BERKER	B.3	aluminium/polar white (glossy)	FTRxUd-210.xxx#55	not required
BERKER	B.7	glass/polar white (matt)	FTRxUd-210.xxx#56	not required
BERKER	B.7	glass/polar white (glossy)	FTRxUd-210.xxx#55	not required
BERKER	K.1	polar white (glossy)		FTRxUd-210.xxx#07 + (1108 71 09)
BUSCH-JAEGER	Reflex SI/SI Linear	alpine white (glossy)	FTRxUd-210.xxx#28	not required
BUSCH-JAEGER	Busch-balance SI	alpine white (glossy)	FTRxUd-210.xxx#55	not required
BUSCH-JAEGER	impuls	alpine white (glossy)		FTRxUd-210.xxx#07 + (1746/10-74)
BUSCH-JAEGER	solo/future/axcent etc.	studio white – see RAL 9016 below		
ELSO	Joy	pure white (glossy)	FTRxUd-210.xxx#55	not required
ELSO	Fashion/Riva/Scala	pure white (glossy)		FTRxUd-210.xxx#07 + 203084
GIRA	surface switch	pure white (glossy)		FTRxUd-210.xxx#07 + (0282 112)
GIRA (System 55)	Standard/E2	pure white (semi-gloss)	FTRxUd-210.xxx#56	not required
GIRA (System 55)	Standard/E2/E3	pure white (glossy)	FTRxUd-210.xxx#55	not required
GIRA (System 55)	E22	pure white (glossy)	FTRxUd-210.xxx#56	not required
GIRA (System 55)	Event	pure white (semi-gloss) + opaque...	FTRxUd-210.xxx#56	not required
GIRA (System 55)	Event	pure white (glossy) + opaque...	FTRxUd-210.xxx#55	not required
GIRA (System 55)	Esprit	pure white (semi-gloss) + glass, aluminium...	FTRxUd-210.xxx#56	not required
GIRA (System 55)	Esprit	pure white (glossy) + glass, aluminium...	FTRxUd-210.xxx#55	not required
GIRA	S-Color	pure white (high-gloss)		FTRxUd-210.xxx#07 + (0282 40)
JUNG	CD 500/CD plus	alpine white (glossy)		FTRxUd-210.xxx#07 + (CD 590 Z WW)
JUNG	A 500/A 550/AS 500/A plus/A flow	alpine white (glossy)	FTRxUd-210.xxx#55	not required
JUNG	LS 990	alpine white (glossy)		FTRxUd-210.xxx#07 + (LS 961 Z WW)
JUNG	LS plus	alpine white (glass)		FTRxUd-210.xxx#07 + (LS 961 Z WW)
JUNG	A creation	alpine white (glossy)	FTRxUd-210.xxx#55	not required
JUNG	LS Design	alpine white (glossy)		FTRxUd-210.xxx#07 + (LS 961 Z WW)
MERTEN (System M)	M-Smart, M-Plan, M-Pure	polar white (matt)	FTRxUd-210.xxx#56	not required
MERTEN (System M)	M-Smart, M-Plan, M-Creativ, M-Pure	polar white (glossy)	FTRxUd-210.xxx#55	not required
MERTEN (Basis System)	1-M/Atelier-M	polar white (glossy)	FTRxUd-210.xxx#55	not required
MERTEN (Surface System)	Artec/Antik	polar white (glossy)		FTRxUd-210.xxx#07 + (5160 99)
MERTEN	1-M/M-Smart/M-Plan/M-Pure/D-Life etc.	active white – see RAL 9016 below		
PEHA	Standard	pure white (glossy)		FTRxUd-210.xxx#07 + (80.670.02 ZV)
PEHA	Dialog	pure white (glossy)		FTRxUd-210.xxx#07 + (95.670.02 ZV)
PEHA	Aura	pure white (matt)/glass		FTRxUd-210.xxx#07 + (20.670.02 ZV)
PEHA	Badora	pure white (glossy)		FTRxUd-210.xxx#07 + (11.670.02 ZV)

Manufacturer	Range	Colour RAL 9016 (surface finish)	Adaptation in switch range "55 x 55" possible using...	"50 x 50" adaptation possible with ... (insert frame from manufacturer required)
BUSCH-JAEGER	solo/future/future linear	studio white (RAL 9016, glossy)		FTRxUd-210.xxx#27 + (1746/10-84)
BUSCH-JAEGER	axcent	studio white (RAL 9016, glossy)		FTRxUd-210.xxx#27 + (1746/10-84)
BUSCH-JAEGER	carat (glass, bronze, gold)	studio white (RAL 9016, glossy)		FTRxUd-210.xxx#27 + (1746/10-84)
BUSCH-JAEGER	alpha (nea/exclusive*)	studio white (RAL 9016, glossy)		FTRxUd-210.xxx#27 + (1746/10-24G)
MERTEN	M-Smart, M-Plan, M-Pure	active white (RAL 9016, glossy)	FTRxUd-210.xxx#59	not required
MERTEN	1-M/Atelier-M	active white (RAL 9016, glossy)	FTRxUd-210.xxx#59	not required
MERTEN	D-Life	lotus white (like RAL 9016)		FTRxUd-210.xxx#27 + (MEG4500-6035)
PEHA	Standard	arctic		FTRxUd-210.xxx#27 + (D 80.670 ZV AW)

*) During assembly, you need to remove 4 plastic tabs located at the rear of the frame

NOTE: Most light switches are designed in the colour "like RAL 9010", although different switch manufacturers use different designations for this colour. Coloured, glass and aluminium frames are also combined with white jacks or plugs so that controllers with white covers can also be integrated into these frames. Check the precise application in each individual case. The frames have different surface qualities (matt/glossy). For design reasons, the cover of the controller should have the same quality as the frame. We accept no liability for slight variations in colour and surface finish or for accuracy of fit. When installing devices into multi frames, always assemble the temperature controllers at the lowest position.

"50 x 50 controller": The housing covers of the 50 x 50 controllers are 50 x 50 mm in size. Using a 50 x 50-mm insert frame, they can be integrated into nearly all light switch ranges in accordance with DIN 49075. The 50 x 50-mm insert frames must be ordered from the light switch manufacturer or from a wholesaler. The order number of the insert frame corresponding to the switch in question can be found in the column "For adaptation of "50 x 50" FTRxUd".

"55 x 55 controller": The housing covers of the 55 x 55 controllers are 55 x 55 mm in size. Many light switch ranges have inner dimensions of 55 x 55 mm. Therefore, the 55 x 55 controllers can be installed directly in the light switch frame without the use of an insert frame. See the column "Adaptation in switch range (55 x 55)" to determine whether the 55 x 55 controller fits in the given light switch (FTRxUd-210.xxx#xx).

All information regarding switch manufacturers' product lines and item numbers was last updated in 12/2019 | No liability is assumed for the information provided. | Technical specifications subject to change.

An adaptation list for RAL 1013 switch ranges is available from our website at www.alre.de.







Technical data

Surface finish: matt
Permissible atmospheric humidity: max. 95% rel. humidity, non-condensing
Control function: heating
Hysteresis: approx. 0.5 K
Radio frequency: 868.3 MHz
Safety and EMC: according to DIN EN 60950-1, DIN EN 300220




Application

Wireless actuators (wireless heating controllers) which, in conjunction with alre wireless room temperature sensors and the b@home gate, implement individual room temperature control. Primarily used in renovations or for heating system extensions.

The actuators can also be connected to the sensors directly without the b@home gate to implement single-room control.



Type/image	Item no.	Features	PG
HTFMA-180.161 	G8000422	<p>General features: 1-channel wireless temperature actuator for radiator valves; “learning mode/battery discharged state” display; emergency mode; adapter for Danfoss RA, RAV, RAVL Housing colour: Pure white, similar to RAL 9010 Housing material: plastic Operating voltage: 2 x Mignon AA, 1.5 V. Do not use rechargeable batteries or lithium batteries! Ambient temperature: 0 ... 50 °C Storage temperature: -20 ... +50 °C Mounting/attachment: M30 x 1.5, included adapter for Danfoss RA, RAV, RAVL Protection rating: IP20 Protection class: III Sensor: NTC internal (for emergency operation control) Nominal stroke: approx. 5 mm Nominal closing force: approx. 100 N Control range: 8 ... 28 °C Display: ready to mount/mechanical adjustment/mechanical adjustment error/loss of connection/learning mode Operating elements: learn button, installation button</p>	I 
HTFRA-010.101 	BA110300	<p>General features: 1-channel wireless temperature actuator; emergency mode; 3000 W switching power, for electric direct heating systems, natural stone heating Housing colour: pure white, similar to RAL 9010 Housing material: plastic Operating voltage: 230 VAC, 50 Hz Ambient temperature: 0 ... 40 °C Storage temperature: -20 ... +70 °C Electrical connection: Schuko adapter Protection rating: IP 30 Protection class: II for loads of protection classes I and II Max. switching current: 13 (3) A Max. switching voltage: 230 VAC, 50 Hz Min. switching voltage: 230 VAC, 50 Hz Switching power: 3000 W Switching element: relay Switching contact: NO contact Control range: 5 ... 30 °C Display: installation mode/function check/connection loss/learning mode Operating elements: Learn button</p>	I 

Smarthome/Wireless – Heating ACTUATORS

Type/image	Item no.	Features	PG
HTFRB-010.101 	BA110500	<p>General features: 1-channel wireless temperature actuator; central control; emergency mode; 3000 W switching power for electrical direct heating systems, natural stone heating</p> <p>Design: Berlin 2000</p> <p>Housing colour: pure white, like RAL 9010</p> <p>Housing material: ABS plastic</p> <p>Operating voltage: 230 VAC, 50 Hz</p> <p>Ambient temperature: 0... 40 °C</p> <p>Storage temperature: -20... +70 °C</p> <p>Electrical connection: screw-type terminals 0.5... 2.5 mm²</p> <p>Mounting/attachment: surface/wall mounting (4-hole assembly on flush-mounted socket)</p> <p>Protection rating: IP 30</p> <p>Protection class: II for loads of protection classes I and II</p> <p>Max. switching current: 13 (2) A</p> <p>Max. switching voltage: 230 VAC, 50 Hz</p> <p>Min. switching voltage: 230 VAC, 50 Hz</p> <p>Switching power: 3000 W</p> <p>Switching element: relay</p> <p>Switching contact: NO contact</p> <p>Control range: 5... 30 °C</p> <p>Display: installation mode/function check/connection loss/learning mode</p> <p>Operating elements: Learn button</p>	I
HTFRU-010.101 	BA110200	<p>General features: 1-channel wireless temperature actuator; central control; emergency operation</p> <p>Design: Berlin UP (flush-mounted)</p> <p>Housing colour: pure white, like RAL 9010</p> <p>Housing material: plastic PC</p> <p>Operating voltage: 230 VAC, 50 Hz</p> <p>Ambient temperature: -20... +50 °C</p> <p>Storage temperature: -20... +70 °C</p> <p>Electrical connection: screw-type terminals 0.5... 2.5 mm²</p> <p>Mounting/attachment: in flush-mounted socket (deep flush-mounted socket recommended)</p> <p>Protection rating: IP 30</p> <p>Protection class: II for loads of protection classes I and II</p> <p>Max. switching current: 11 A, from 30 °C ambient temperature 7.5 A</p> <p>Max. switching voltage: 230 VAC, 50 Hz</p> <p>Min. switching voltage: 230 VAC, 50 Hz</p> <p>Switching power: 2500 W, from 30 °C ambient temperature 1700 W</p> <p>Switching element: relay</p> <p>Switching contact: NO contact</p> <p>Control range: 5... 30 °C</p> <p>Display: installation mode/function check/connection loss/learning mode</p> <p>Operating elements: Learn button</p>	I
HTFRU-110.124 	BA110201	<p>General features: 1-channel wireless temperature actuator; for activating an (electrical) floor heating system, the controller has a sensor input to which an optionally available remote sensor can be connected, which is then embedded in the floor. The following operating modes can be used in conjunction with such a sensor: Floor temperature control function or room temperature control function with floor monitoring and direct or central setpoint temperature setting (central control); if the sensor is dispensed with, the HTFRU-110.124 works as a room temperature controller with direct or central setpoint temperature setting (central control); central control; emergency operation</p> <p>Housing colour: Pure white, similar to RAL 9010</p> <p>Housing material: plastic PC</p> <p>Operating voltage: 230 VAC, 50 Hz</p> <p>Ambient temperature: -20... +50 °C</p> <p>Storage temperature: -20... +70 °C</p> <p>Electrical connection: screw-type terminals 0.5... 1.5 mm²</p> <p>Mounting/attachment: in flush-mounted socket (deep flush-mounted socket recommended)</p> <p>Protection rating: IP20</p> <p>Protection class: II for loads of protection classes I and II</p> <p>Safety and EMC: according to DIN EN 60950-1, DIN EN 300220</p> <p>Max. switching current: 10 A to 30 °C ambient temperature</p> <p>Max. switching voltage: 230 VAC, 50 Hz</p> <p>Min. switching voltage: 230 VAC, 50 Hz</p> <p>Switching power: 2300 W up to 30 °C ambient temperature</p> <p>Switching element: relay</p> <p>Switching contact: NO contact</p> <p>Control range: 5... 30 °C</p> <p>Display: installation mode/function check/connection loss/learning mode</p> <p>Operating elements: Learn button</p>	I









Smarthome/Wireless – Heating ACTUATORS

Type/image	Item no.	Features	PG
<p>HTFRL-214.140</p> 	BA121000	<p>General features: 4-channel wireless temperature actuator for mounting in the heating manifold, max. 4 actuators/channels can be directly connected, including pump module, one time zone possible per channel, master-slave operation, average value calculation with up to 8 measurement points. The upper part can be removed to teach the wireless sensors in the individual rooms. This requires the use of an optional commercial 9 V battery. The rooms (b@home) or sensors can be configured easily using the channel selection button and a learn button. Emergency mode; 4 fastening screws for wall mounting (see page 34 for implementation of central control using KTFRx)</p> <p>Housing colour: Light grey, similar RAL 7035</p> <p>Housing material: ABS plastic</p> <p>Operating voltage: 230 V AC, 50 Hz</p> <p>Ambient temperature: -10 ... +50 °C</p> <p>Storage temperature: -20 ... +70 °C</p> <p>Electrical connection: Spring-cage terminals 0.5 ... 1.5 mm²</p> <p>Mounting/attachment: surface/wall-mounting</p> <p>Protection rating: IP20</p> <p>Protection class: II for loads of protection classes I and II</p> <p>Max. switching current: 3 (1) A</p> <p>Max. switching voltage: 230 VAC, 50 Hz</p> <p>Min. switching voltage: 230 VAC, 50 Hz</p> <p>Switching power: total 1150 W, of which 180 W for pump output</p> <p>Switching element: 5 relays</p> <p>Switching contact: 5 NO contacts</p> <p>Control range: 5 ... 30 °C</p> <p>Display: Installation mode, connection and status check, connection loss, learning mode are indicated per channel</p> <p>Operating elements: Channel selection button, learning button</p>	I
<p>HTFRL-316.125</p> 	BA120800	<p>General features: 8-channel wireless temperature actuator for mounting in the heating manifold, max. 4 actuators/channel can be directly connected, including pump module, one time zone possible per channel, master-slave operation, average value calculation with up to 8 measurement points; 4 fastening screws for wall mounting; installation mode; connection and status check, connection loss, learning mode are indicated per channel. The upper part can be removed to teach the wireless sensors in the individual rooms. The precondition is the use of an optional commercial 9 V battery. The rooms (b@home) or sensors can be configured easily using the channel selection button and a learn button. (See page 34 for implementation of central control using KTFRx)</p> <p>Housing colour: Light grey, similar to RAL 7035</p> <p>Housing material: ABS plastic</p> <p>Operating voltage: 230 VAC, 50 Hz</p> <p>Ambient temperature: -10 ... +50 °C</p> <p>Storage temperature: -20 ... +70 °C</p> <p>Electrical connection: spring-cage terminals 0.5 ... 1.5 mm²</p> <p>Mounting/attachment: surface/wall-mounting</p> <p>Protection rating: IP20</p> <p>Protection class: II for loads of protection classes I and II</p> <p>Max. switching current: 3 (1) A</p> <p>Max. switching voltage: 230 VAC, 50 Hz</p> <p>Min. switching voltage: 230 VAC, 50 Hz</p> <p>Switching power: total 1150 W, 180 W of this for pump output</p> <p>Switching element: 9 relays</p> <p>Switching contact: 9 NO contacts</p> <p>Control range: 5 ... 30 °C</p> <p>Operating elements: channel selection button, learn button</p>	I








Smarthome/Wireless – Heating ACTUATORS


Type/image	Item no.	Features	PG
 <p>HF-8/4-K2</p>	G8000370	General features: Optional external floor sensor for HTFRU-110.124 Ambient temperature: -5... +70 °C Protection rating: IP65 Sensor: NTC Connecting cable: 4 m, PVC	II
 <p>HF-8/6-K2</p>	G8000368	General features: Optional external floor sensor for HTFRU-110.124 Ambient temperature: -5... +70 °C Protection rating: IP65 Sensor: NTC Connecting cable: 6 m, PVC	II
WP-01	G9990180	General features: heat conduction paste 2 ml; R > 1 TΩ/cm, silicone-free Ambient temperature: -40... +150 °C Heat conductivity: > 0.7 W/mK	II
 <p>JZ-24</p>	BN990002	General features: magnetic fastening set for simple and safe fastening of the multi-channel actuators on a metallic substrate (for example, heating manifold)	II
 <p>JZ-25</p>	BN990003	General features: external antenna for reception enhancement of the multi-channel actuators under difficult reception conditions (antenna cable JZ-26 is not a part of the delivery scope) Design: Berlin 1000 Surface finish: glossy Housing colour: pure white, like RAL 9010 Housing material: ABS plastic Storage temperature: -20... +70 °C Admissible humidity: max. 95 % rel. humidity, non-condensing Protection rating: IP 30	II
 <p>JZ-26</p>	BN990004	General features: Antenna cable for connecting the external antenna (JZ-25) with multi-channel actuators Connecting cable: 1 m	II
 <p>THF</p>	C1809515	General features: heat conduction paste 2 ml; R > 1 TΩ/cm, silicone-free	II




Compatible with valve actuators ZBOOA-010.100 Page 106

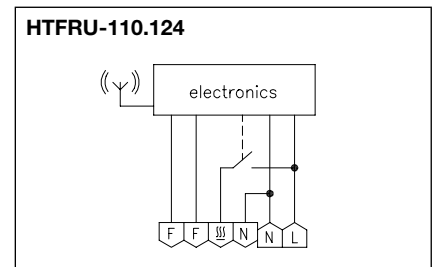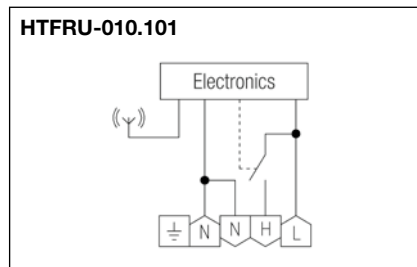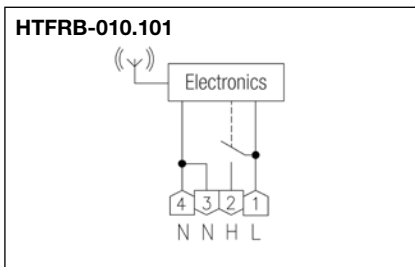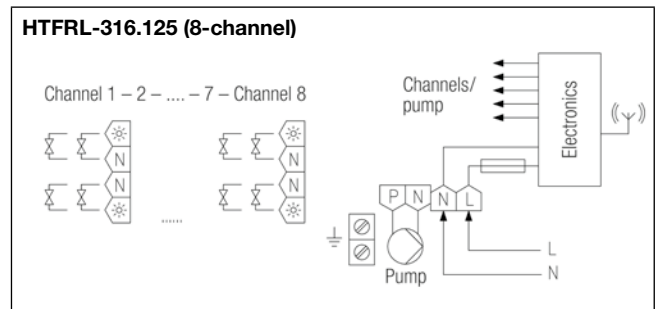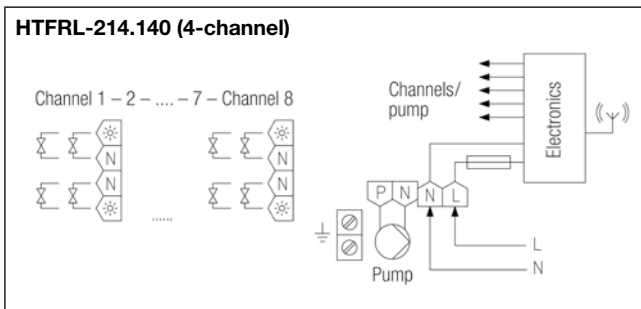


HTFMA-180.161

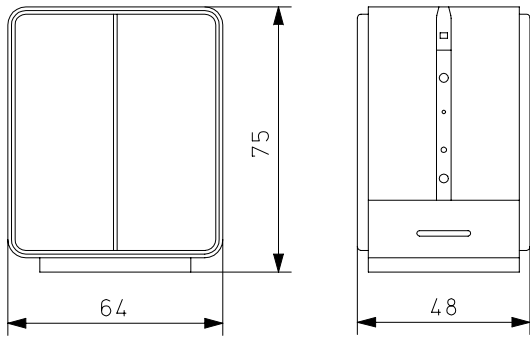


HTFRA-010.101

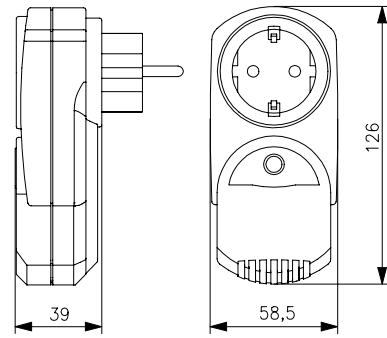


HTFRB-010.101

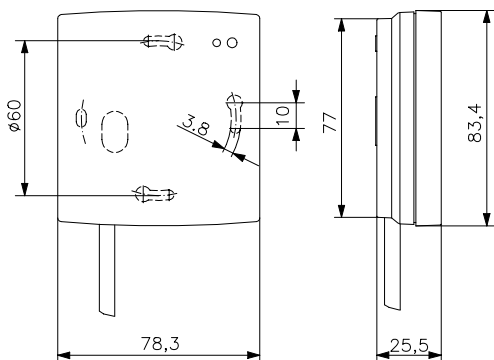


HTFRU-010.101

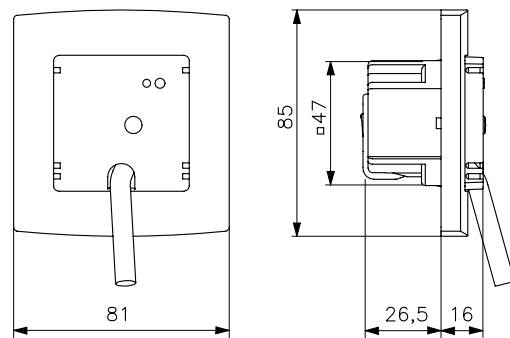


HTFRU-110.124

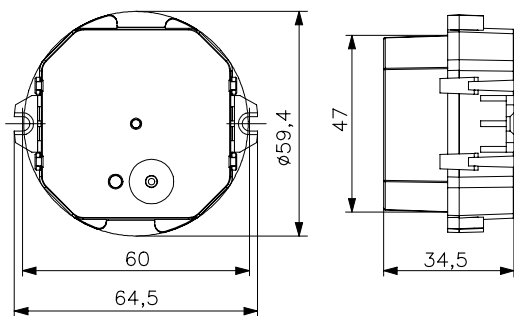

HTFRL-214.140



HTFRL-316.125

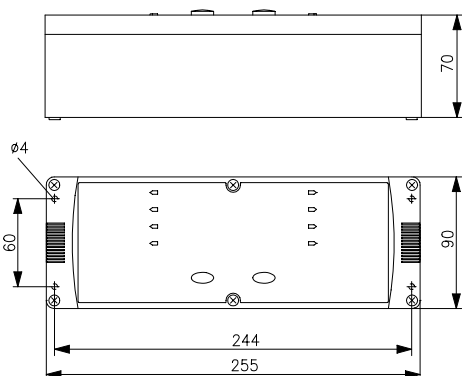



Technical data





Surface finish:	matt
Housing colour:	light grey, like RAL 7035
Housing material:	ABS plastic
Operating voltage:	230 VAC, 50 Hz
Ambient temperature:	-10 ... +50 °C
Storage temperature:	-20 ... +70 °C
Permissible atmospheric humidity:	max. 95% rel. humidity, non-condensing
Electrical connection:	spring-cage terminals 0.5 ... 1.5 mm ²
Mounting/attachment:	surface/wall mounting
Protection class:	II for loads of protection classes I and II
Safety and EMC:	according to DIN EN 60950-1, DIN EN 300220
Max. switching voltage:	230 VAC, 50 Hz
Min. switching voltage:	230 VAC, 50 Hz
Control function:	heating or cooling
Control range:	5 ... 30 °C
Hysteresis:	approx. 0.5 K
Neutral zone:	adjustable 0 ... 6 K
Radio frequency:	868.3 MHz
General features:	external dew point sensor; ECO function; operating mode "off with frost protection monitoring"; central control; emergency operation mode
Factory setting:	neutral zone 0 K
Operating elements:	Channel selection button, learn button
Accessories:	suitable valve actuators: ZBOOA-010.100 optional magnetic fastening set for simple installation in heating manifold: JZ-24 external antenna: JZ-25 antenna cable 1 m: JZ-26
Display:	Installation mode, connection and status check, temperature below dew point, connection loss, learning mode are indicated per channel

Application

Wireless temperature controllers (actuators) used to implement a single-room climate control in conjunction with alre wireless room temperature sensors. The actuators can also be connected to the sensors directly without the b@home gate to implement single-room control.




Functions: Heating, cooling with adjustable neutral zone; H/C change-over on site or via an external contact; on/off switching by contact with frost protection function; individual channels can be excluded from cooling operation; cooling interruption if condensation occurs, via dew point sensor or contact; cooling limit 18 °C; energy-saving function centrally via external timer or centrally or locally in master-slave operation, (max. 4/8 time zones possible, i.e., up to 4/8 sensors can be connected to clock); status display of the wireless connection for each channel, automatic emergency mode if connection lost;

The upper part can be removed for configuring the wireless sensors/channels in the individual rooms. The power supply is ensured during this time with a standard commercial 9-V block battery. The sensors can be configured easily using the channel selection button and a learn button. Attachment: There are 4 screws for wall attachment that are part of the standard kit; as an option, a magnetic attachment set JZ-24 for simple attachment in the heating manifold distribution cabinet can also be supplied.

Type/image	Item no.	Features	PG
 <p>KTFRL-213.140</p>	BA121100	<p>Protection rating: IP 20 Max. switching current: output 1-4: 3 (1) A Pump output: 0.75 A* Total of all the outputs (4 channels + pump output): 3 (1) A Switching power: Total 920 W, of which 180 W is pump output Switching element: 5 relays Switching contact: 5 NO contacts</p>	I 
 <p>KTFRL-315.125</p>	BA120900	<p>Protection rating: IP 20 Max. switching current: output 1-8: 3 (1) A Pump output: 0.75 A* Total of all the outputs (8 channels + pump output): 3 (1) A Switching power: Total 1380 W, of which 180 W is pump output Switching element: 9 relays Switching contact: 9 NO contacts</p>	I 





* Pump module included in scope of delivery

Smarthome/Wireless – Heating/cooling ACTUATORS

Type/image	Item no.	Features	PG
JZ-24 	BN990002	General features: Magnetic fastening set for simple and safe fastening of the multi-channel actuators on a metallic substrate (for example heating manifold)	II
JZ-25 	BN990003	General features: External antenna for reception enhancement of the multi-channel actuators under difficult reception conditions (antenna cable JZ-26 is not a part of the delivery scope) Design: Berlin 1000 Surface finish: Glossy Housing colour: pure white, like RAL 9010 Housing material: ABS plastic Storage temperature: -20 ... +70 °C Admissible humidity: max. 95% rel. humidity, non-condensing Protection rating: IP 30	II
JZ-26 	BN990004	General features: Antenna cable for connecting the external antenna (JZ-25) with multi-channel actuators Connecting cable: 1 m	II



Compatible with valve actuators ZBOOA-010.100 Page 106

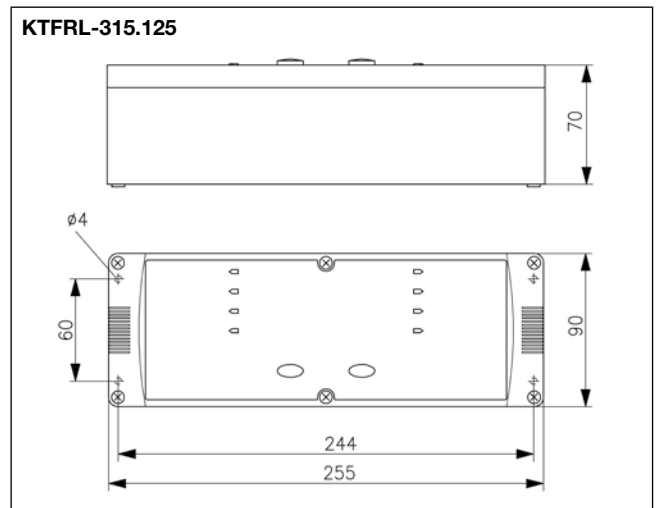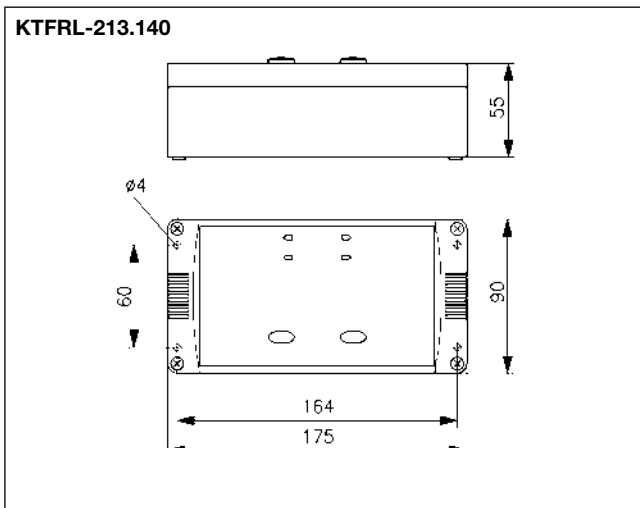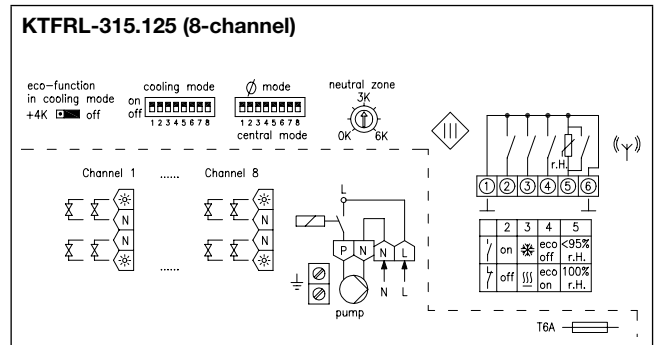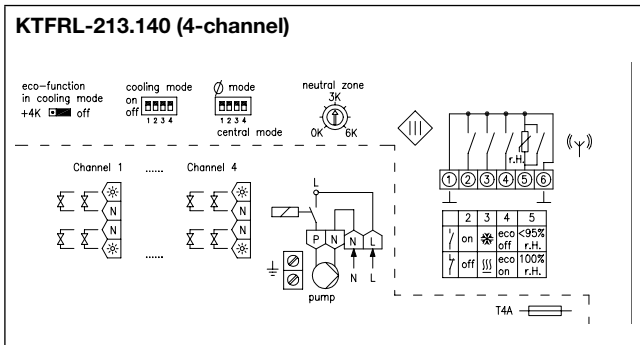


All advantages and possibilities of b@home at a glance



- Safe and secure control, monitoring and programming of heating/cooling controls from any location
- Up to 32 rooms or heating/cooling zones
- Quick and easy commissioning
- Intuitive operation
- Individual room control
- Suitable for all heating systems
- System can be controlled using multiple mobile end devices
- No Internet connection required for the control function
- Can be retrofitted in existing alre wireless systems*
- Free apps, no additional costs, such as monthly subscription costs for example

* Except clock sensors FTRFBu 180.1xx and FTRFUd 210.123, since corresponding functions are implemented in the app/gate/web portal

Scalable from private houses to industrial complexes

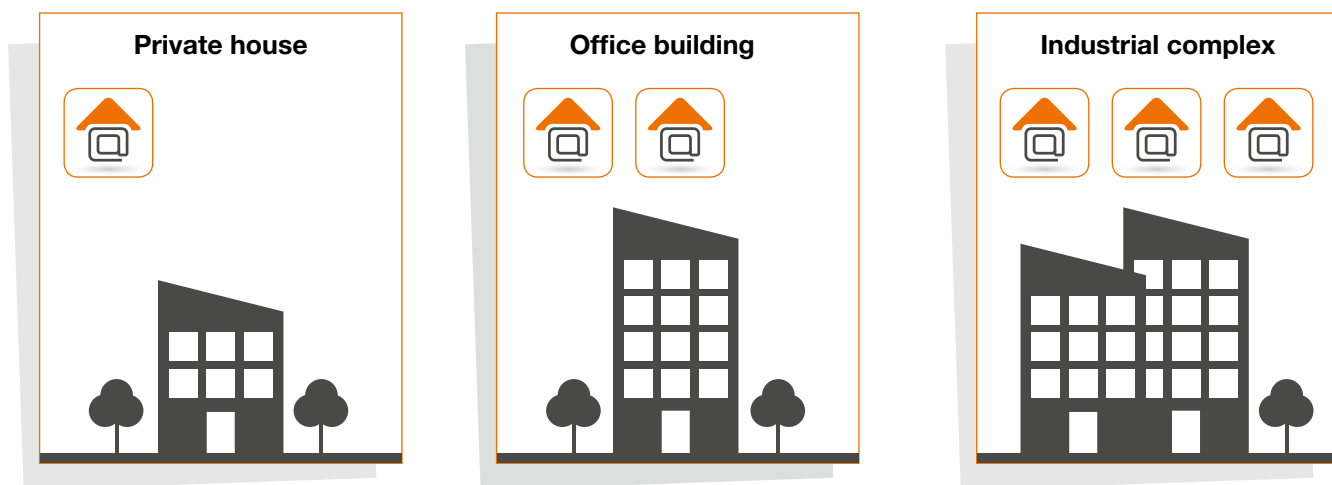

One advantage of the alre modular smarthome solution is its excellent scalability. This smarthome system allows you to automate a single home or commercial premises – from a small office building to an entire industrial complex.

b@home mobile for smartphones or tablets



b@home website



b@home product film



b@home installation film



alre website

BUILDING AUTOMATION



Ahead of the future.



BUILDING AUTOMATION

Intelligent, flexible and sustainable


Building automation means the automatic control, regulation, monitoring and optimisation of various building functions such as heating, cooling or ventilation. As an essential component of technical facility management, building automation is intended to improve user comfort as well as reduce energy and operating costs.

For this purpose, all sensors, actuators, operating elements and other technical components in the building are networked. This networking runs in configurations that ensure that all components interact intelligently.

With its applications, the new aire BACnet climate controller covers most fields of application in automated individual room control.

Application examples:

- Hot water underfloor heating
- Electric underfloor heating
- Ceiling cassettes
- Underfloor convectors
- Heating and cooling ceilings
- Duct devices

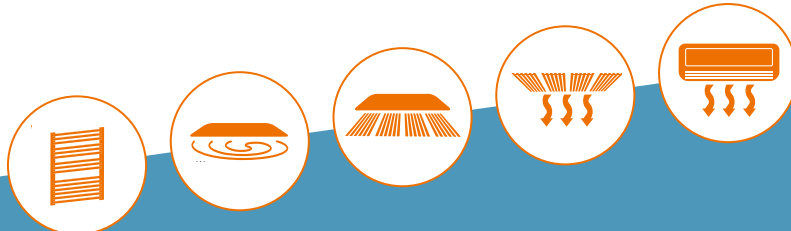


BUILDING AUTOMATION overview:


System information


General	40–41
Communication via BACnet MS/TP	42–43
alre BACnet room controller connection options	44–45
alre BACnet room controller/heating and cooling ceiling application example	46–47
Integration into various switch ranges	48–49
Overview of application	50

Individual components

	BACnet room controller KTRBUu	51–54
	alre BACnet individual room controller adaptation	55


Product innovation





Control buildings sustainably and efficiently with the new BACnet individual room controller from alre. The controller covers a wide range of applications for building automation.

See page 42 onwards for more information



alre



Managing the future safely – sustainably and efficiently

Industry 4.0, cloud computing, blockchain, smart living - digitalisation is THE topic of today. Building automation is also developing at a rapid pace. The latest technologies, networked systems and constantly increasing requirements call for intelligent, flexible and convenient solutions.

In addition to convenience and high levels of functionality, smart systems also have a positive impact on operating costs. Modern building automation increases the value of properties and is therefore becoming increasingly important for rentals and sales.

With the new alre BACnet climate controller, we have developed an innovative device especially for the requirements of individual room control in building automation.

Communication via BACnet MS/TP

In order to use the networked functions, all building automation systems must be interconnected and open. Communication takes place via an open interface such as BACnet, for example.


The alre BACnet room controller (KTRBUu 217.456) communicates via BACnet according to DIN EN ISO 16484-5 with the BACnet MS/TP network protocol. This makes it compatible with all common building automation systems. It corresponds to the BACnet profile “B-AAC” (BACnet Advanced Application Controller) and is therefore much more than a simple setpoint generator.

In contrast to other fieldbus interfaces such as LON or KNX, the BACnet interface does not require an additional gateway for implementation and communication with the management level. This saves costs because service technicians with different qualifications are not required to commission the system. A further cost saving compared to distributed solutions is achieved by combining the room control unit and individual room controller in one device.

The BACnet individual room controller is therefore extremely versatile – in residential, office and business premises, in hotels, schools, hospitals and more.

Your advantages for all fields of application

- Individual room controller with controller function (B-AAC)
- Flush-mounted – integration in all common switch ranges (50 mm / 55 mm / 60 mm)
- Selectable application for various user applications
- Cost benefit for investment and commissioning
- No additional gateways required (BACnet MS/TP)
- Reduction of installation and operating costs

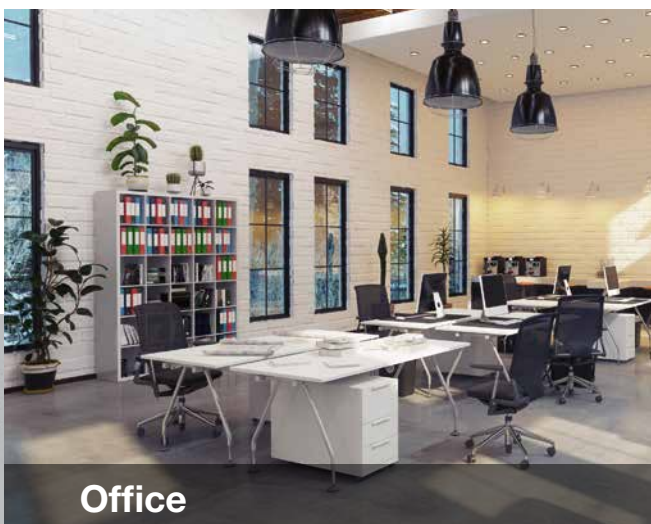

alre BACnet individual room controller connection options


The alre BACnet room controller with graphic display is suitable for time-dependent heating and cooling operation in 2 or 4-pipe systems.

The device has two inputs and three outputs. Two of the outputs switch relays, each of which can address up to 5 actuators. The third output is analogue (0-10 V) and can be used, for example, for EC fan control.

One of the two inputs is used for BACnet communication. The other can be configured to connect sensors, for example for temperature or dew point. Windows or presence contacts can be connected via BACnet.

Technical highlights and features

- Internal temperature sensor
- Connectible external temperature sensor
- Connectible external dew point sensor
- MS/TP interface
- 0-10 V EC fan coil
- I/O mix integrated in device



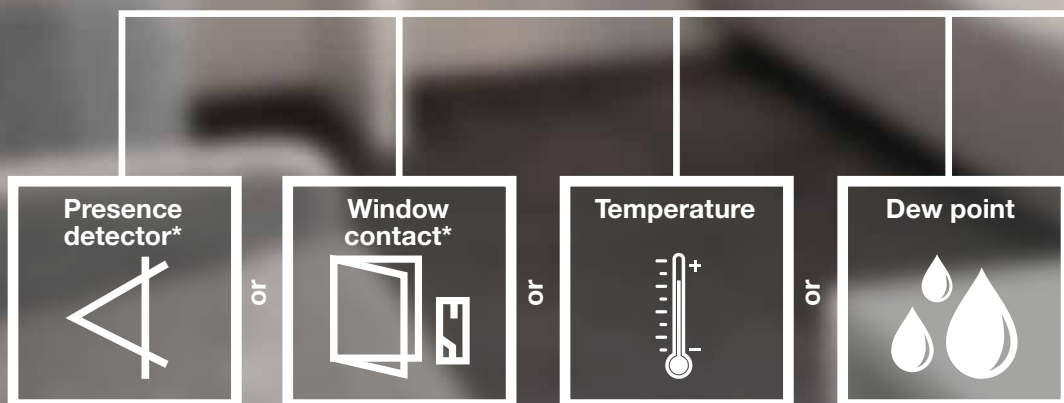


* depending on existing application

BMS

BACnet IP

BACnet MS/TP




alre BACnet individual room controller/ heating and cooling ceiling application example

Planners prefer heating and cooling ceilings for comfortable air conditioning in buildings because it prevents draughts or disturbing noises.


With its pre-configured system diagrams, the alre BACnet individual room controller (KTRBUu 217.456) supports the most common air conditioning applications.


The “cooling and heating ceiling in 4-pipe system” variant controls heating and cooling valves, monitors the dew point and interrupts cooling operation if condensation begins to form.

The control range of the BACnet individual room controller is determined by the building management system. If this fails, the controller also functions independently and maintains control operation in the room.

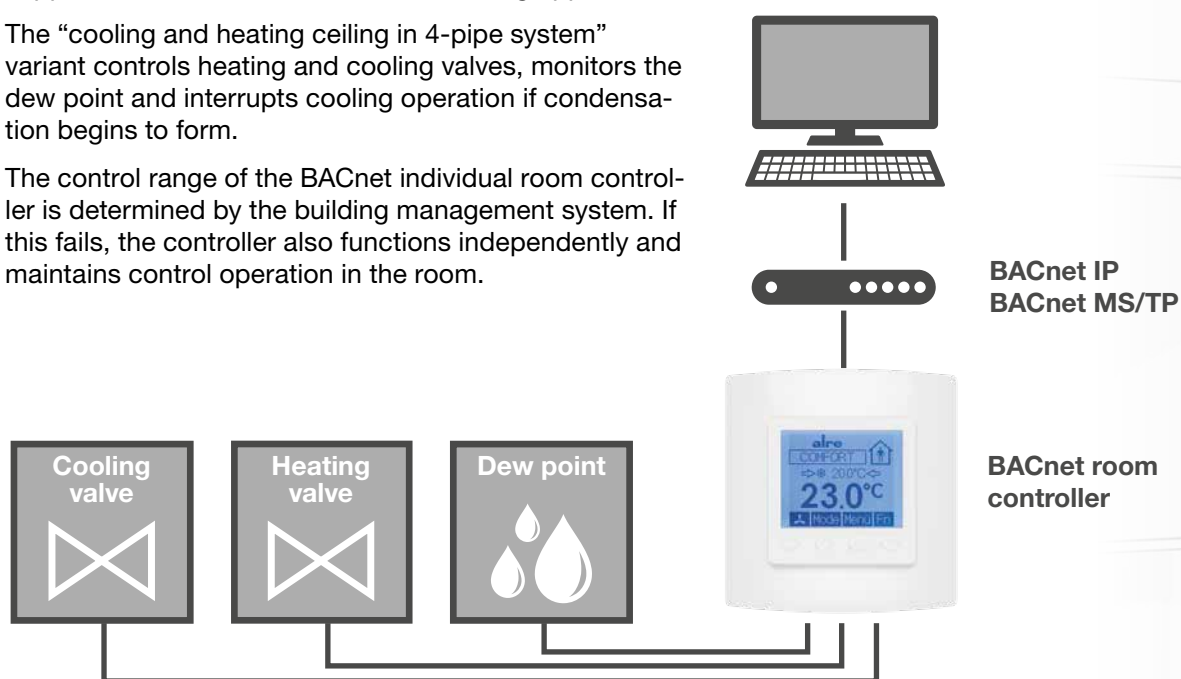

Wide range of applications

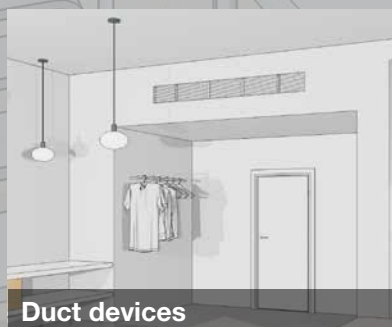

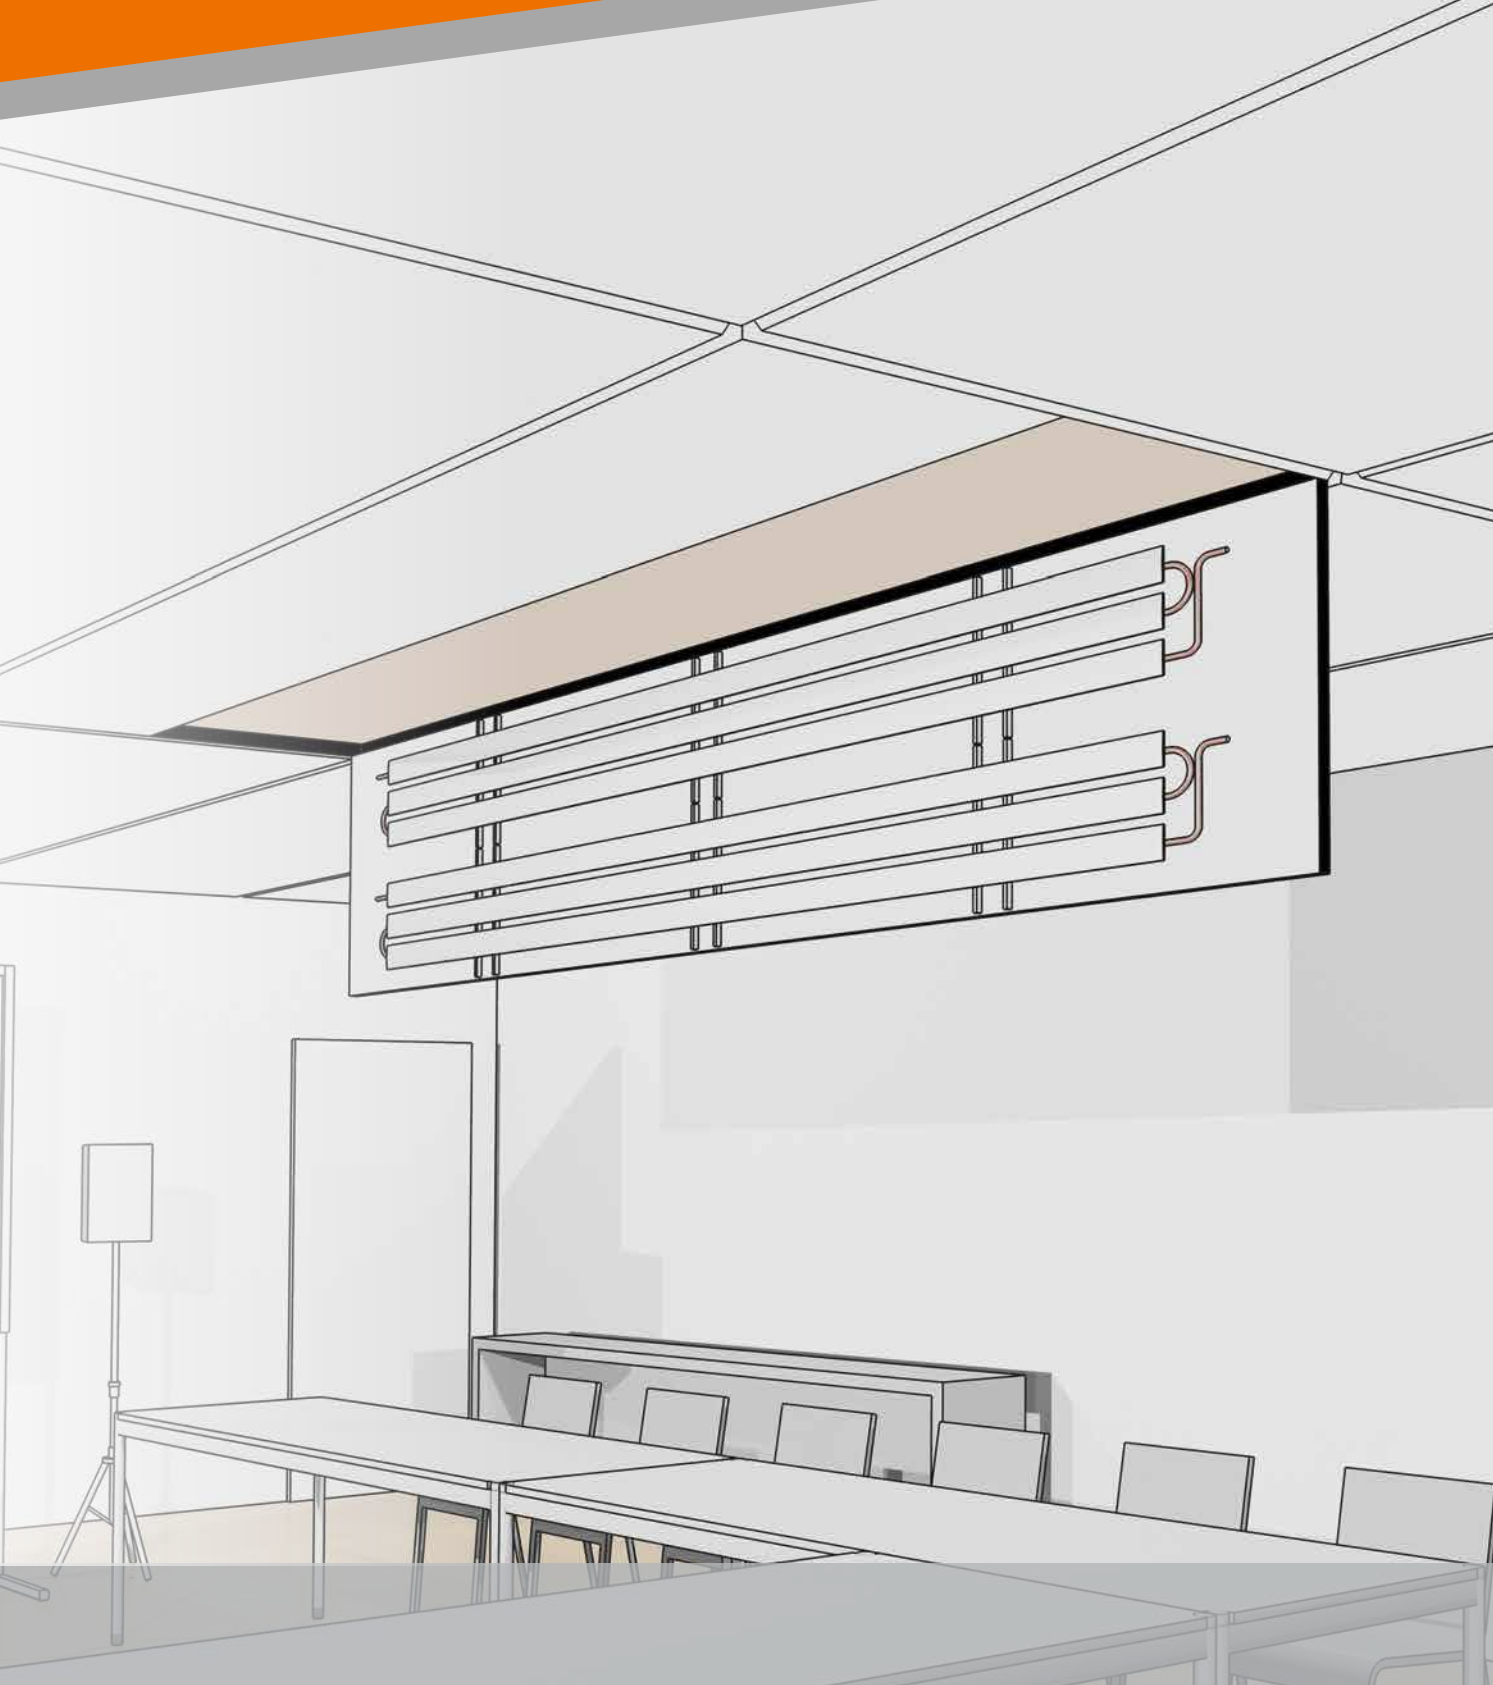

Ceiling cassettes



Underfloor convectors



Underfloor heating and ceiling cassettes

Suitable for all current switch ranges

The alre BACnet individual room controller is mounted in a flush-mounted socket. The housing fits exactly into design frames of sizes 50 x 50 mm, 55 x 55 mm and 60 x 60 mm from surface switch ranges of well-known manufacturers such as Berker, Busch-Jaeger, Gira, Jung, Merten, Peha, Hager or Feller (CH).

Adaptation examples



KTRBUu 217.456 in
BERKER S.1



KTRBUu 217.456 in
BUSCH-JAEGER balance SI



KTRBUu 217.456 in
GIRA Standard 55



Check out the product video now!



KTRBUu 217.456 in
JUNG AS 50



KTRBUu 217.456 in
MERTEN 1-M

Integration examples of the BACnet individual room controller in switch ranges of different manufacturers.

All variants also fit in multiple frames from all well-known manufacturers. Also available in special colours anthracite and aluminium on request.

2 = 2-pipe system
 4 = 4-pipe system
 RA = Radiator
 FB = Floor temperature control
 KD = Ceiling temperature control
 UK = Underfloor convector
 HR = Heating coil
 KR = Cooling coil

Type	Application	Systems							Ext. sensors					Actuators						
		2-pipe system	4-pipe system	Radiator	Floor temperature control	Ceiling temperature control	Underfloor convector	Heating coil	Cooling coil	TP Dew point sensor	TB Temperature limiter	Supply air temperature	Room air temperature	Floor screed temperature	Fan 0... 10 V	VAV 0... 10 V	Heating valve	Cooling valve	Heating/cooling valve	6-way ball valve 0... 10 V
2-pipe system underfloor heating with screed temperature sensor	2FB001	•			•								•			•				
2-pipe system underfloor heating with limiter	2FB002	•			•				•							•				
2-pipe system cooling/heating ceiling with dew point monitor	2KD001	•				•			•										•	
2-pipe system heating/cooling coil with fan and supply air temperature	2HRKR001	•						•		•				•					•	
2-pipe system with radiator with external room temperature sensor	2RA001	•		•								•				•				
4-pipe system radiator (heating), cooling ceiling with dew point monitor	4RAKD001		•	•		•			•							•	•			
4-pipe system radiator, cooling coil with fan and supply air temperature limitation*	4RAKR001		•	•					•	•				•		•	•			
2-pipe system underfloor convector with room temperature sensor and fan	2UK001	•					•					•		•					•	
4-pipe system floor temperature control with temperature limiter	4FB001		•		•					•						•	•			
4-pipe system cooling/heating ceiling with dew point monitor and 6-way ball valve	4KD001		•			•			•											•
4-pipe system cooling/heating ceiling with dew point monitor and VAV	4KD002		•			•			•						•	•	•			
4-pipe system cooling/heating ceiling with dew point monitor	4KD003		•			•			•							•	•			
4-pipe system heating and cooling coil with fan and supply air temperature	4HRKR001		•					•		•				•		•	•			
4-pipe system underfloor convector with dew point monitor and fan	4UK001		•				•		•					•		•	•			

BACnet room controller KTRBUu

Flush-mounted installation – Design Berlin UP



Technical data

Design:	Berlin UP (flush-mounted)
Housing material:	PC, PMMA, ABS plastic
Operating voltage:	230 VAC, 50 Hz
Ambient temperature:	0... 40 °C
Storage temperature:	-20... +70 °C
Permissible atmospheric humidity:	Max. 95% rel. humidity, non-condensing
Electrical connection:	pluggable screw terminals Mains voltage side 0.75 - 2.5 mm ² Low voltage side 0.08 - 1.5 mm ²
Mounting/attachment:	In flush-mounted socket, can be adapted to fit virtually any switch range (deep flush-mounted socket recommended) see adaptation list on page 55
Protection rating:	IP 30
Protection class:	II
Safety and EMC:	according to DIN EN 60730
Max. switching voltage:	230 VAC, 50 Hz
Min. switching voltage:	230 VAC, 50 Hz
Switching power:	690 W
Max. power consumption:	approx. 1 W (2.2 VA)
Max. switching current:	all 3 (0.5) A (max. 5 valve actuators per output)
Switching element:	2 relays
Switching contact:	2 NO contacts
Output signal:	Switching heating, cooling, heating/cooling, analogue 0... 10 V (5 mA) to control a speed-controlled fan
Sensor:	Internal NTC, optional external "Sensor 2" * (NTC 47K), dew point sensor
Control range:	5... 40 °C
Setting range:	Standard setting range for heating (5...30 °C), second setting range for cooling (18...40 °C)
Hysteresis:	< 1 K
Display type:	illuminated graphical display
Pipe system compatibility:	2-pipe and 4-pipe

Application

The alre BACnet individual room controller with graphic display was specially developed for time-dependent heating and cooling operation in 2- or 4-pipe systems. The controller can be used in a wide range of applications, such as hotels, residential, office and business premises as well as hospitals and schools.

The communication takes place via BACnet according to DIN EN ISO 16484-5 with the BACnet MS/TP network protocol. The room controller is therefore compatible with all common building automation systems. The controller corresponds to the BACnet profile "B-AAC" (BACnet Advanced Application Controller).

The predefined applications cover a wide range of applications for room temperature control in room automation.

Special colours are available for projects on request.

Type/image	Item no.	Features	Circuit diagram	PG
	UA230000	Surface finish: Glossy Housing colour: pure white, similar to RAL 9010 Scope of delivery: controller, cover 50 x 50 mm, pure white (similar to RAL 9010), glossy, alre frame "Berlin"		IV

* Depending on the selected system scheme, a menu setting can be used to select whether control should be based on the internal or external sensor. In the intermediate positions, if both sensors are used, a weighting is applied to the internal room sensor and the external temperature sensor. The weighting allows for compensation of different structural conditions such as large window areas or cardinal directions. For very slow controlled systems, it is recommended to assign a higher weighting to the temperature sensor than to the internal room sensor.









BACnet room controller KTRBUu

Flush-mounted installation – Design Berlin UP

Type/image	Item no.	Features	Circuit diagram	PG
	KTRBUu217.456#07	UA230002	Like KTRBUu217.456#21 but scope of delivery as follows: Controller, cover 50 x 50 mm pure white (similar to RAL 9010), glossy , without frame	IV
	KTRBUu217.456#09	UA230003	like KTRBUu217.456#21 but with delivery scope: controller, cover 50 x 50 mm pearl white (similar to RAL 1013), glossy , without frame	IV
	KTRBUu217.456#27	UA230004	Like KTRBUu217.456#21 but scope of delivery as follows: Controller, cover 50 x 50 mm traffic/studio white (similar to RAL 9016), glossy , without frame	IV
	KTRBUu217.456#28	UA230007	Like KTRBUu217.456 but scope of delivery as follows: Controller, cover suitable for BUSCH-JAEGER Reflex SI/SI Linear pure white (similar to RAL 9010), glossy , without frame	IV
	KTRBUu217.456#55	UA230005	Like KTRBUu217.456#21 but scope of delivery as follows: Controller, cover 55 x 55 mm pure white (similar to RAL 9010), glossy , without frame	IV
	KTRBUu217.456#56	UA230009	Like KTRBUu217.456#21 but scope of delivery as follows: Controller, cover 55 x 55 mm pure white (similar to RAL 9010), matt without frame	IV
	KTRBUu217.456#57	UA230006	Like KTRBUu217.456#21 but scope of delivery as follows: Controller, cover 55 x 55 mm pearl white (similar to RAL 1013), glossy , without frame	IV
	KTRBUu217.456#59	UA230008	Like KTRBUu217.456#21 but scope of delivery as follows: Controller, cover 55 x 55 mm traffic/studio white (similar to RAL 9016), glossy , without frame	IV

BACnet room controller KTRBUu

Flush-mounted installation – Design Berlin UP

Accessories	Item no.	Features	PG
	JZ-090.900 VV000025	Design: Berlin Surface finish: glossy Housing colour: pure white, similar to RAL 9010 Housing material: PC plastic General features: alre frame “Berlin” (neutral) for all flush-mounted controllers with cover 50 x 50 mm	I
	JZ-090.910 VV000010	Design: Berlin Surface finish: glossy Housing colour: pearl white, similar to RAL 1013 Housing material: PC plastic General features: alre frame “Berlin” (neutral) for all flush-mounted controllers with cover 50 x 50 mm	I
	TPS 1 G8000299	Dew point sensor to detect and report the dew point (see also Air Conditioning Technology chapter, page 136) Mounting/attachment: using clips on cooling ceiling capillary pipe Use: Drywall cooling ceiling (plasterboard) with hung up capillary pipe mat, metal cooling ceiling with integrated capillary pipe system Sensor wire extendible up to: 50 m with 2 x 0.5 mm ² Scope of delivery: sensor, 2 clips for cooling pad	I
	TPS 2 G8000300	Dew point sensor to detect and report the dew point (see also Air Conditioning Technology chapter, page 136) Mounting/attachment: using clips on cooling ceiling capillary pipe or cable ties on the pipe Use: Pipe systems transporting cold water, plaster cooling ceiling with capillary tube system Sensor wire extendible up to: 50 m with 2 x 0.5 mm ² Scope of delivery: Sensor, 2 clips for cooling pad, 2 cable ties	I
	TPS 3 SN120000	Dew point sensor to detect and report the dew point (see also Air Conditioning Technology chapter, page 136) Mounting/attachment: Attach to pipe by means of cable ties Use: piped cold-water systems Sensor wire extendible up to: 50 m with 2 x 0.5 mm ² Scope of delivery: Sensor, 2 cable ties	I
	BTF2-C47-0000 SA140014	Surface-mounted “ultra-thin” room temperature sensor for temperature measurement in residential and business premises (see also Sensors chapter, page 200) Mounting/attachment: surface/wall mounting (4-hole assembly on flush-mounted socket) Housing colour: pure white, similar to RAL 9010, glossy Housing material: ABS plastic Ambient temperature: –10 ... +50 °C Admissible humidity: Max. 95% rel. humidity, non-condensing Protection rating: IP 30 Protection class: III Electrical connection: screw-type terminals 0.33 mm ² to 1.5 mm ²	III
	FUFC 47-0000 SN090198	Flush-mounted room temperature sensor for temperature measurement in residential and business premises (see also Sensors chapter, page 201) Mounting/attachment: In flush-mounted socket, can be adapted to fit virtually any 50 x 50 mm surface switch range Housing colour: Pure white, similar to RAL 9010, glossy Housing material: PC plastic Ambient temperature: –10 ... +50 °C Admissible humidity: Max. 95% rel. humidity, non-condensing Protection rating: IP 30 Protection class: III Electrical connection: screw-type terminals 0.5 mm ² to 1.5 mm ²	III
	AF-2 G9040380	Temperature sensor for temperature measurement outdoors and in humid areas, special protection against dust and humidity (see also Sensors chapter, page 203) Mounting/attachment: surface/wall mounting Housing colour: Pure white, similar to RAL 9010 Housing material: PA plastic (30% GF reinforced) Ambient temperature: –30 ... +70 °C Admissible humidity: Max. 95% rel. humidity, non-condensing Protection rating: IP 65 Protection class: III Electrical connection: screw-type terminals 0.14 mm ² to 2.5 mm ²	III
Accessories	Item no.	Features	PG

BACnet room controller KTRBUu

Flush-mounted installation – Design Berlin UP

KF-2

G9031446



Cable temperature sensor for floor or supply air temperature measurement/limiting (see also Sensors chapter, page 206)

III

Mounting/attachment: In immersion sleeve, protection coil, on pipe, etc.

Pipe material/length: PE, 1.5 m

Sensor sleeve material: V4A (1.4571)

Ambient temperature: -35 ... +100 °C

Admissible humidity: Max. 95% rel. humidity, non-condensing

Protection rating: IP 67

Protection class: III

Electrical connection: Safety extra low voltage only

max. 30 V AC / 42 V DC

ZBOOA-010.100

H9100010



Electro-thermal valve actuator (see also Heating/Air Conditioning Technology chapter)

I

Mounting/attachment: M 30 x 1.5

Housing colour: Pure white, similar to RAL 9010

Housing material: PC plastic, GF (20%)

Operating voltage: 230 V~, 50 Hz

Max. power consumption: 70 W

Max. starting current: Approx. 0.3 A

Ambient temperature: 0 ... 50 °C

Storage temperature: -20 ... +70 °C

Admissible humidity: Max. 95% rel. humidity, non-condensing

Protection rating: IP 42

Protection class: II

Average power consumption: Approx. 3 W

Opening/closing time: Approx. 4 min

Nominal stroke: 3 mm

Function type: Normally closed


Nominal closing force: 90 N

Connecting cable: 0.8 m / 2 x 0.5 mm²


KTRBUu with alre frame "Berlin"



Pluggable screw-type terminals

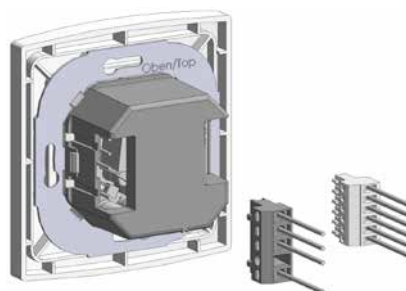

KTRBUu with alre frame "Berlin"

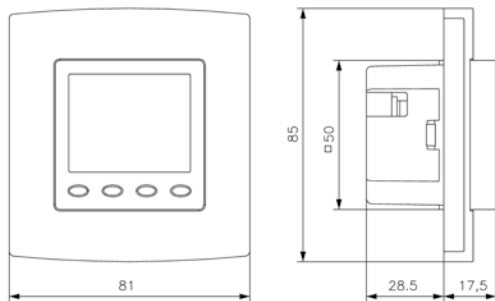

alre BACnet KTRBUu217.456 individual room controller adaptation

Flush-mounted

Manufacturer	Range	Colour RAL 9010 (surface finish)	Adaptation in switch range "55 x 55" possible using...	"50 x 50" adaptation possible with ... (insert frame from manufacturer required)
BERKER	S.1	polar white (matt)	KTRBUu217.456#56	not required
BERKER	S.1	polar white (glossy)	KTRBUu217.456#55	not required
BERKER	Arsys	polar white (glossy)		KTRBUu217.456#07 + 1108 01 69
BERKER	B.3	aluminium/polar white (matt)	KTRBUu217.456#56	not required
BERKER	B.3	aluminium/polar white (glossy)	KTRBUu217.456#55	not required
BERKER	B.7	glass/polar white (matt)	KTRBUu217.456#56	not required
BERKER	B.7	glass/polar white (glossy)	KTRBUu217.456#55	not required
BERKER	K.1	polar white (glossy)		KTRBUu217.456#07 + 1108 71 09
BUSCH-JAEGER	Reflex SI/SI Linear	alpine white (glossy)	KTRBUu217.456#28	not required
BUSCH-JAEGER	Busch-balance SI	alpine white (glossy)	KTRBUu217.456#55	not required
BUSCH-JAEGER	impuls	alpine white (glossy)		KTRBUu217.456#07 + 1746/10-74
BUSCH-JAEGER	solo/future/axcent etc.	studio white – see RAL 9016 below		
Elso	Joy	pure white (glossy)	KTRBUu217.456#55	not required
Elso	Fashion/Riva/Scala	pure white (glossy)		KTRBUu217.456#07 + (203084)
GIRA	surface switch	pure white (glossy)		KTRBUu217.456#07 + 0282 112
GIRA (System 55)	Standard/E2	pure white (semi-gloss)	KTRBUu217.456#56	not required
GIRA (System 55)	Standard/E2/E3	pure white (glossy)	KTRBUu217.456#55	not required
GIRA (System 55)	E22	pure white (glossy)	KTRBUu217.456#55	not required
GIRA (System 55)	Event	pure white (semi-gloss) + opaque...	KTRBUu217.456#56	not required
GIRA (System 55)	Event	pure white (glossy) + opaque...	KTRBUu217.456#55	not required
GIRA (System 55)	Esprit	pure white (semi-gloss) + glass, aluminium...	KTRBUu217.456#56	not required
GIRA (System 55)	Esprit	pure white (glossy) + glass, aluminium...	KTRBUu217.456#55	not required
GIRA	S-Color	pure white (high-gloss)		KTRBUu217.456#07 + 0282 40
JUNG	CD 500/CD plus	alpine white (glossy)		KTRBUu217.456#07 + CD 590 Z WW
JUNG	A 500/A 550/AS 500/A plus/A flow	alpine white (glossy)	KTRBUu217.456#55	not required
JUNG	LS 990	alpine white (glossy)		KTRBUu217.456#07 + LS 961 Z WW
JUNG	LS plus	alpine white (glass)		KTRBUu217.456#07 + LS 961 Z WW
JUNG	A creation	alpine white (glossy)	KTRBUu217.456#55	not required
JUNG	LS Design	alpine white (glossy)		KTRBUu217.456#07 + LS 961 Z WW
MERTEN (System M)	M-Smart, M-Plan, M-Pure	polar white (matt)	KTRBUu217.456#56	not required
MERTEN (System M)	M-Smart, M-Plan, M-Creativ, M-Pure	polar white (glossy)	KTRBUu217.456#55	not required
MERTEN (System Basis)	1-M/Atelier-M	polar white (glossy)	KTRBUu217.456#55	not required
MERTEN (Surface System)	Artec/Antik	polar white (glossy)		KTRBUu217.456#07 + 5160 99
MERTEN	1-M/M-Smart/M-Plan/M-Pure/D-Life	active white – see RAL 9016 below		
PEHA	Standard	pure white (glossy)		KTRBUu217.456#07 + 80.670.02 ZV
PEHA	Dialog	pure white (glossy)		KTRBUu217.456#07 + 95.670.02 ZV
PEHA	Aura	pure white (matt)/glass		KTRBUu217.456#07 + 20.670.02 ZV
PEHA	Badora	pure white (glossy)		KTRBUu217.456#07 + 11.670.02 ZV

Manufacturer	Range	Colour RAL 9016 (surface finish)	Adaptation in switch range "55 x 55" possible using ...	To adapt KTRBUu size 50 x 50, an insert frame from the manufacturer is required
BUSCH-JAEGER	solo/future/future linear	studio white (RAL 9016, glossy)		KTRBUu217.456#27 + 1746/10-84
BUSCH-JAEGER	axcent	studio white (RAL 9016, glossy)		KTRBUu217.456#27 + 1746/10-84
BUSCH-JAEGER	carat (glass, bronze, gold)	studio white (RAL 9016)		KTRBUu217.456#27 + 1746/10-84
BUSCH-JAEGER	alpha (nea/exclusive*)	studio white (RAL 9016, glossy)		KTRBUu217.456#27 + 1746/10-24G
MERTEN	M-Smart, M-Plan, M-Pure	active white (RAL 9016, glossy)	KTRBUu217.456#59	not required
MERTEN	1-M/Atelier-M	active white (RAL 9016, glossy)	KTRBUu217.456#59	not required
Merten	D-Life	Lotus white (RAL 9016)		KTRBUu217.456#27 + MEG4500-6035
PEHA	Standard	arctic		KTRBUu217.456#27 + D 80.670 ZV AW

*) During assembly, you need to remove 4 plastic tabs located at the rear of the frame.

NOTE: Most light switches are designed in the colour "similar to RAL 9010", although different switch manufacturers use different designations for this colour. Coloured, glass and aluminium frames are also combined with white jacks or plugs so that controllers with white covers can also be integrated into these frames. Check the precise application in each individual case. The frames have different surface qualities (matt/glossy). For design reasons, the cover of the controller should have the same quality as the frame. We accept no liability for slight variations in colour and surface finish or for accuracy of fit. When installing devices into multi frames, always assemble the temperature controllers at the lowermost position.

"50 x 50 controller": The housing covers of the 50 x 50 controllers are 50 x 50 mm in size. Using a 50 x 50-mm insert frame, they can be integrated into nearly all light switch ranges in accordance with DIN 49075. The 50 x 50-mm insert frames must be ordered from the light switch manufacturer or from a wholesaler. The order number of the insert frame corresponding to the switch range in question can be found in the column "For adaptation of '50 x 50' KTRBUu".

"55 x 55 controller": The housing covers of the 55 x 55 controllers are 55 x 55 mm in size. Many light switch ranges have inner dimensions of 55 x 55 mm. Therefore, the 55 x 55 controllers can be installed directly in the light switch frame without the use of an insert frame. See the column "Adaptation in switch range (55 x 55)" to determine whether the 55 x 55 controller fits in the given light switch range (KTRBUu217.456#xx).

All information regarding switch manufacturers' product lines and item numbers was last updated in 12/2019 | No liability is assumed for the information provided. | Technical specifications subject to change.

An adaptation list for RAL 1013 switch ranges is available from our website at www.alre.de.

HEATING TECHNOLOGY



Heating technology

Cozy heating just like magic.



HEATING TECHNOLOGY

Warmth and well-being.

From temperature controllers and terminal strips to valve actuators, we offer a complete product range in a timelessly elegant design.

The right solution for everyone based on individual needs.










Application examples:

- Hot water underfloor heating
- Electric underfloor heating
- Natural stone heating
- Night storage heating
- Tiled stove heating
- Partial air conditioners
- Mobile radiators
- Accessories such as terminal strips and actuators





Overview of HEATING TECHNOLOGY:

Room/floor temperature controllers

	Overview of devices	60
	Room temperature controller, bimetal (mechanical) "surface-mounted"	61–66
	Room temperature controller, bimetal (mechanical) "surface-mounted ultra-slim"	67–69
	Room temperature controller, bimetal (mechanical) "surface-mounted or plug-in"	70–71
	Room temperature controller, electronic, with clock "surface-mounted"	72–73
	Room temperature controller, bimetal (mechanical) "flush-mounted"	74–93
	Room or floor temperature controller, electronic, with clock "flush-mounted"	94–97
	Floor temperature or surface temperature controller, electronic "surface-mounted"	98–99
	Floor temperature controller, electronic, with clock "surface-mounted"	100–101
	Floor temperature controller, electronic, "flush-mounted"	102–105

Terminal strips for heating manifolds/valve actuators

	Thermal valve actuators 24 V~/=, 230 V~	106
	Terminal strips for heating manifolds	107–109


Product innovation



NEW

The new bimetal controller from alre offers a number of advantages. New terminals enable fast and convenient connection without screws. This will save you time, and above all, costs.

See page 74 onwards for more information



NEW

The optimised terminal strip allows you to wire actuators clearly and conveniently. Screwless spring terminals, labelling fields or integrated strain relief simplify installation enormously.

See page 107 onwards for more information

Mechanical room temperature controller, RTBSB

Surface-mounted installation – Design Berlin 2000



Technical data

Design:	Berlin 2000
Surface finish:	matt
Housing colour:	pure white, like RAL 9010
Housing material:	ABS plastic
Storage temperature:	-20 ... +70 °C
Permissible atmospheric humidity:	Max. 95% rel. humidity, non-condensing
Electrical connection:	screw-type terminals 0.12 mm ² to 2.5 mm ²
Mounting/attachment:	Surface/wall mounting (4-hole assembly on flush-mounted socket)
Protection rating:	IP 30
Safety and EMC:	according to DIN EN 60730
Average power consumption:	< 0.5 W
Switching element:	bimetallic contact
Sensor:	bimetal
General features:	thermal feedback

Application





Control or monitoring of temperatures in closed spaces. Suitable for all heating systems.

Valve actuator: normally closed. If normally open heating valves are available, they should be connected with the cooling output of the changeover switch (toggler).

Up to a maximum of 10 actuators for valves can be connected (normally closed, NC); with a toggler, on the NO contact, up to 5 units (in this context, please check the switching capacity listed in the technical specifications).







Installation note: Owing to the existing wiring space in the controller itself, installation on a flush-mounted socket is recommended, but it can also be performed on a plane, non-conducting substrate.

Explanations of technical terms can be found in the annex to the product catalogue or at www.alre.de.

Type/image	Item no.	Features	Circuit diagram	PG
RTBSB-001.000 	MA010000	General features: Mechanical range limitation; scale: Degrees Celsius; external setting Operating voltage: 230 VAC, 50 Hz Ambient temperature: 0 ... 30 °C Protection class: II, if properly mounted Max. switching current: 10 (4) A Max. switching voltage: 230 VAC, 50 Hz Min. switching voltage: 230 VAC, 50 Hz Switching power: 2300 W Switching contact: NC contact (max. 10 actuators) Output signal: switching (230 VAC, 50 Hz) Control function: heating Control range: 5 ... 30 °C Hysteresis: Approx. 0.5 K at a temperature change of max. 4 K/h		I
RTBSB-001.002 	MA010100	General features: ECO function; mechanical range limitation; scale: degrees Celsius; external setting Operating voltage: 230 VAC, 50 Hz Ambient temperature: 0 ... 30 °C Protection class: II, if properly mounted Max. switching current: 10 (4) A Max. switching voltage: 230 VAC, 50 Hz Min. switching voltage: 230 VAC, 50 Hz Switching power: 2300 W Switching contact: NC contact (max. 10 actuators) Output signal: switching (230 VAC, 50 Hz) Control function: heating Control range: 5 ... 30 °C Hysteresis: Approx. 0.5 K at a temperature change of max. 4 K/h Input "temperature reduction": Approx. 4 K (230 VAC, 50 Hz)		I







Mechanical room temperature controller, RTBSB

Surface-mounted installation – Design Berlin 2000

Type/image	Item no.	Features	Circuit diagram	PG
<p>RTBSB-001.010</p> 	MA010200	<p>General features: Mechanical range limitation; scale: Degrees Celsius; external setting Operating voltage: 230 VAC, 50 Hz Ambient temperature: 0...30 °C Protection class: II, if properly mounted Max. switching current: Heating (terminal 3) 10 (4) A, cooling (terminal 1) 5 (2) A Max. switching voltage: 230 VAC, 50 Hz Min. switching voltage: 230 VAC, 50 Hz Switching power: Terminal 3: 2300 W, terminal 1: 1150 W Switching contact: changeover switch (toggler, max. 10 actuators output terminal 3, max. 5 actuators output terminal 1) Output signal: Switching (230 VAC, 50 Hz) Control function: heating or cooling Control range: 5...30 °C Hysteresis: Approx. 0.5 K at a temperature change of max. 4 K/h</p>		I
<p>RTBSB-001.026</p> 	MA010900	<p>General features: mechanical range limitation; scale: Degrees Celsius; on/off switch: external setting Operating voltage: 230 VAC, 50 Hz Ambient temperature: 0...30 °C Protection class: II, if properly mounted Max. switching current: Heating (terminal 3) 10 (4) A, cooling (terminal 1) 5 (2) A, fan (terminal 2) 5 (2) A Max. switching voltage: 230 VAC, 50 Hz Min. switching voltage: 230 VAC, 50 Hz Switching power: terminal 3: 2300 W, terminal 1: 1150 W, terminal 2: 1150 W Switching contact: Changeover switch (toggler, max. 10 actuators output terminal 3, max. 5 actuators output terminal 1) Output signal: Switching (230 VAC, 50 Hz); fan permanently operating (230 VAC, 50 Hz) if device has been switched on Control function: Heating or cooling Control range: 5...30 °C Hysteresis: Approx. 0.5 K at a temperature change of max. 4 K/h</p>		I
<p>RTBSB-001.045</p> 	MA011200	<p>General features: Mechanical range limitation; scale: Degrees Celsius; external setting Operating voltage: 230 VAC, 50 Hz Ambient temperature: -20...+30 °C Protection class: II, if properly mounted Max. switching current: Heating (terminal 3) 10 (4) A, cooling (terminal 1) 5 (2) A, Max. switching voltage: 230 VAC, 50 Hz Min. switching voltage: 230 VAC, 50 Hz Switching power: terminal 3: 2300 W, terminal 1: 1150 W Switching contact: Changeover switch (toggler, max. 10 actuators output terminal 3, max. 5 actuators output terminal 1) Output signal: Switching (230 VAC, 50 Hz) Control function: Heating or cooling Control range: -20...+30 °C Hysteresis: Approx. 1.5 K at a temperature change of max. 4 K/h</p>		I


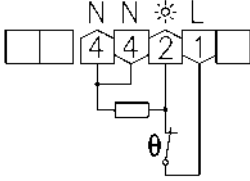




Mechanical room temperature controller, RTBSB

Surface-mounted installation – Design Berlin 2000

Type/image	Item no.	Features	Circuit diagram	PG
RTBSB-001.048 	MA011300	<p>General features: Mechanical range limitation; scale: Degrees Celsius; external setting</p> <p>Operating voltage: 230 VAC, 50 Hz</p> <p>Ambient temperature: 10 ... 60 °C</p> <p>Protection class: II, if properly mounted</p> <p>Max. switching current: heating (terminal 3) 10 (4) A, cooling (terminal 1) 5 (2) A</p> <p>Max. switching voltage: 230 VAC, 50 Hz</p> <p>Min. switching voltage: 230 VAC, 50 Hz</p> <p>Switching power: terminal 3: 2300 W, terminal 1: 1150 W</p> <p>Switching contact: changeover switch (toggler, max. 10 actuators output terminal 3, max. 5 actuators output terminal 1)</p> <p>Output signal: switching (230 VAC, 50 Hz)</p> <p>Control function: heating or cooling</p> <p>Control range: 10 ... 60 °C</p> <p>Hysteresis: Approx. 1.5 K at a temperature change of max. 4 K/h</p>		I
RTBSB-001.062 	MA012400	<p>General features: ECO function; “heating” display; mechanical range limitation; scale: degrees Celsius; on/off switch; external setting</p> <p>Input “temperature reduction”: approx. 4 K (230 VAC, 50 Hz)</p> <p>Operating voltage: 230 VAC, 50 Hz</p> <p>Ambient temperature: 0 ... 30 °C</p> <p>Protection class: II, if properly mounted</p> <p>Max. switching current: 10 (4) A</p> <p>Max. switching voltage: 230 VAC, 50 Hz</p> <p>Min. switching voltage: 230 VAC, 50 Hz</p> <p>Switching power: 2300 W</p> <p>Switching contact: NC contact (max. 10 actuators)</p> <p>Output signal: heating, switching (230 VAC, 50 Hz)</p> <p>Control function: heating</p> <p>Control range: 5 ... 30 °C</p> <p>Hysteresis: Approx. 0.5 K at a temperature change of max. 4 K/h</p>		I
RTBSB-001.065 	MA010600	<p>General features: mechanical range limitation; scale: Degrees Celsius; “heating/cooling” switch; external setting</p> <p>Operating voltage: 230 VAC, 50 Hz</p> <p>Ambient temperature: 0 ... 30 °C</p> <p>Protection class: II, if properly mounted</p> <p>Max. switching current: 5 (2) A</p> <p>Max. switching voltage: 230 VAC, 50 Hz</p> <p>Min. switching voltage: 230 VAC, 50 Hz</p> <p>Switching power: 1150 W</p> <p>Switching contact: changeover switch (toggler, max. 5 actuators)</p> <p>Output signal: switching (230 VAC, 50 Hz)</p> <p>Control function: heating or cooling</p> <p>Control range: 5 ... 30 °C</p> <p>Hysteresis: Approx. 0.5 K at a temperature change of max. 4 K/h</p>		I









Mechanical room temperature controller, RTBSB

Surface-mounted installation – Design Berlin 2000

Type/image	Item no.	Features	Circuit diagram	PG
	MA010800	<p>General features: Mechanical range limitation; 3000 W switching power, for electric direct heating systems, natural stone heating; multi-digit display 1 ... 6; external setting</p> <p>Operating voltage: 230 VAC, 50 Hz</p> <p>Ambient temperature: 0 ... 30 °C</p> <p>Protection class: II, if properly mounted</p> <p>Max. switching current: 13 (4) A</p> <p>Max. switching voltage: 230 VAC, 50 Hz</p> <p>Min. switching voltage: 230 VAC, 50 Hz</p> <p>Switching power: 3000 W</p> <p>Switching contact: NC contact</p> <p>Output signal: switching (230 VAC, 50 Hz)</p> <p>Control function: heating</p> <p>Control range: 5 ... 30 °C</p> <p>Hysteresis: Approx. 1 K at a temperature change of max. 4 K/h</p> <p>Accessories: can be combined with plug-in socket JZ-19</p>		I
	MA012500	<p>like RTBSB-001.086, but with "heating" display (LED red)</p>		I
	MA012701	<p>General features: Mechanical range limitation; scale: Degrees Celsius; external setting</p> <p>Operating voltage: 230 VAC, 50 Hz or 24 VAC, 50 Hz</p> <p>Ambient temperature: 0 ... 30 °C</p> <p>Protection class: II, if properly mounted; with 24 V, protection class III</p> <p>Max. switching current: Heating (terminal 3) 230 VAC 10 (4) A or 24 VAC 2 (2) A, cooling (terminal 1) 5 (2) A or 24 VAC 2 (2) A</p> <p>Max. switching voltage: 230 VAC, 50 Hz</p> <p>Min. switching voltage: 24 VAC, 50 Hz</p> <p>Switching power: Terminal 3: 2300 W at 230 VAC, 48 W at 24 VAC, terminal 1: 1150 W at 230 VAC, 48 W at 24 VAC</p> <p>Switching contact: Changeover switch (toggler, max. 5 actuators)</p> <p>Output signal: Switching (230 VAC, 50 Hz or 24 VAC, 50 Hz)</p> <p>Output signal: Cooling, switching (230 VAC, 50 Hz or 24 VAC, 50 Hz)</p> <p>Control function: heating or cooling</p> <p>Control range: 5 ... 30 °C</p> <p>Hysteresis: Approx. 0.5 K at a temperature change of max. 4 K/h</p>		I



Mechanical room temperature controller, RTBSB

Surface-mounted installation – Design Berlin 2000


Type/image	Item no.	Features	Circuit diagram	PG
	MA011700	<p>General features: ECO function; mechanical range limitation; scale: Degrees Celsius; external setting</p> <p>Operating voltage: 24 VAC, 50 Hz</p> <p>Ambient temperature: 0...30 °C</p> <p>Protection class: III</p> <p>Max. switching current: 1 (1) A</p> <p>Max. switching voltage: 24 VAC, 50 Hz</p> <p>Min. switching voltage: 24 VAC, 50 Hz</p> <p>Switching power: 24 W</p> <p>Switching contact: NC contact (max. 5 actuators)</p> <p>Output signal: switching (24 VAC, 50 Hz)</p> <p>Control function: heating</p> <p>Control range: 5...30 °C</p> <p>Hysteresis: Approx. 0.5 K at a temperature change of max. 4 K/h</p> <p>Input "temperature reduction": Approx. 4 K (24 VAC, 50 Hz)</p>		I
	MA013401	<p>General features: 2-wire room temperature controller; mechanical range limitation; multi-digit display *...6; external setting</p> <p>Operating voltage: 230 VAC, 50 Hz</p> <p>Ambient temperature: 0...30 °C</p> <p>Protection class: II, if properly mounted</p> <p>Max. switching current: 1 A or 5 A (see circuit diagram)</p> <p>Min. switching current: 0.5 A or 1 A (see circuit diagram)</p> <p>Min. switching voltage: 230 VAC, 50 Hz</p> <p>Min. switching voltage: 230 VAC, 50 Hz</p> <p>Switching power: 230 W or 1150 W (see circuit diagram)</p> <p>Switching contact: NC contact</p> <p>Output signal: switching (230 VAC, 50 Hz)</p> <p>Control function: heating</p> <p>Control range: 5...30 °C</p> <p>Hysteresis: Approx. 1 K at a temperature change of max. 4 K/h (load-dependent)</p>		I
	MA012000	<p>General features: ECO function; scale: Degrees Celsius; internal setting</p> <p>Operating voltage: 230 VAC, 50 Hz</p> <p>Ambient temperature: 0...30 °C</p> <p>Protection class: II, if properly mounted</p> <p>Max. switching current: Heating (terminal 3) 10 (4) A, cooling (terminal 1) 5 (2) A,</p> <p>Max. switching voltage: 230 VAC, 50 Hz</p> <p>Min. switching voltage: 230 VAC, 50 Hz</p> <p>Switching power: Terminal 3: 2300 W, terminal 1: 1150 W</p> <p>Switching contact: changeover switch (toggler, max. 10 actuators output terminal 3, max. 5 actuators output terminal 1)</p> <p>Output signal: switching (230 VAC, 50 Hz)</p> <p>Control function: heating or cooling</p> <p>Control range: 5...30 °C</p> <p>Hysteresis: Approx. 0.5 K at a temperature change of max. 4 K/h</p> <p>Input "temperature reduction": Approx. 4 K (230 VAC, 50 Hz)</p>		I
	MA012100	<p>General features: ECO function; scale: Degrees Celsius; internal setting</p> <p>Operating voltage: 24 VAC, 50 Hz</p> <p>Ambient temperature: 0...30 °C</p> <p>Protection class: III</p> <p>Max. switching current: 1 (1) A</p> <p>Max. switching voltage: 24 VAC, 50 Hz</p> <p>Min. switching voltage: 24 VAC, 50 Hz</p> <p>Switching power: 24 W</p> <p>Switching contact: changeover switch (toggler, max. 3 actuators)</p> <p>Output signal: switching (24 VAC, 50 Hz)</p> <p>Control function: heating or cooling</p> <p>Control range: 5...30 °C</p> <p>Hysteresis: Approx. 0.5 K at a temperature change of max. 4 K/h</p> <p>Input "temperature reduction": Approx. 4 K (24 VAC, 50 Hz)</p>		I



Mechanical room temperature controller, RTBSB

Surface-mounted installation – Design Berlin 2000

Type/image	Item no.	Features	Circuit diagram	PG
	MA012600	<p>General features: scale: Degrees Celsius; internal setting</p> <p>Operating voltage: 230 VAC, 50 Hz or 24 VAC, 50 Hz</p> <p>Ambient temperature: 10 ... 60 °C</p> <p>Protection class: II, if properly mounted; with 24 V, protection class III</p> <p>Max. switching current: Heating (terminal 3) 230 VAC 10 (4) A or 24 VAC 2 (2) A, cooling (terminal 1) 5 (2) A or 24 VAC 2 (2) A,</p> <p>Max. switching voltage: 230 VAC, 50 Hz</p> <p>Min. switching voltage: 24 VAC, 50 Hz</p> <p>Switching power: terminal 3: 2300 W at 230 VAC, 48 W at 24 VAC, terminal 1: 1150 W at 230 VAC, 48 W at 24 VAC</p> <p>Switching contact: changeover switch (togglor, max. 10 actuators output terminal 3, max. 5 actuators output terminal 1)</p> <p>Output signal: switching (230 VAC, 50 Hz or 24 VAC, 50 Hz)</p> <p>Control function: Heating or cooling</p> <p>Control range: 10 ... 60 °C</p> <p>Hysteresis: Approx. 1.5 K at a temperature change of max. 4 K/h</p>		I

Accessories: terminal strips VOOxx, suitable valve actuators ZBOOA

 You can find other/similar controllers with outputs for heating/cooling and noiseless controllers in the "Air Conditioning Technology" chapter.

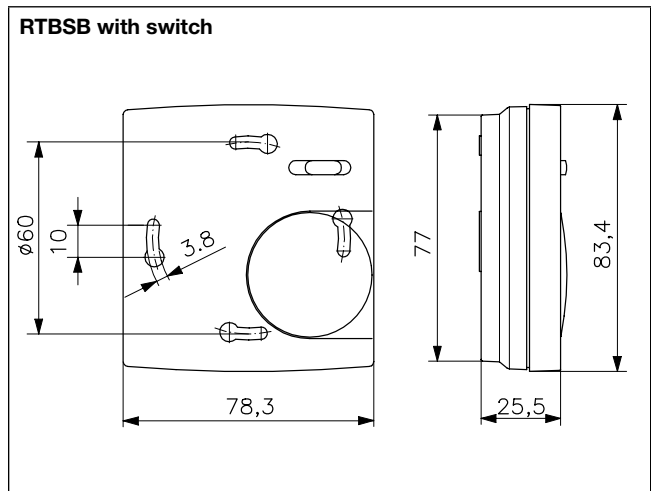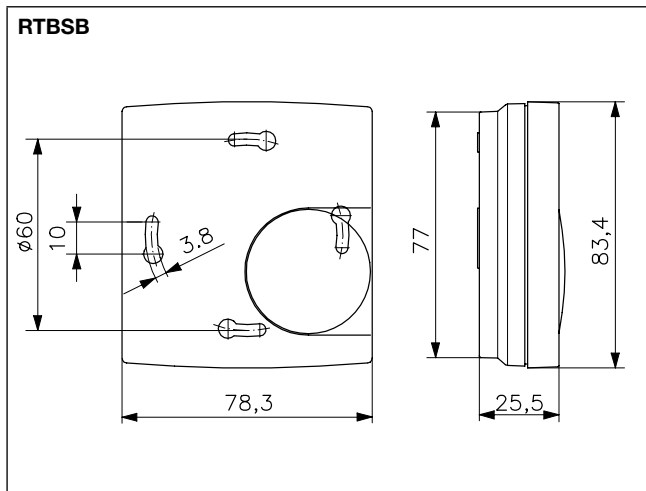

Mechanical room temperature controller, RTBSB

Surface-mounted “ultra-thin” installation – Design Berlin 1000



Technical data

Design:	Berlin 1000
Surface finish:	glossy
Housing colour:	pure white, like RAL 9010
Housing material:	ABS plastic
Ambient temperature:	0 ... 30 °C
Storage temperature:	-20 ... +70 °C
Permissible atmospheric humidity:	Max. 95% rel. humidity, non-condensing
Electrical connection:	screw-type terminals 0.33 mm ² to 1.5 mm ²
Mounting/attachment:	Surface/wall mounting (4-hole assembly on flush-mounted socket)
Protection rating:	IP 30
Safety and EMC:	according to DIN EN 60730
Average power consumption:	< 0.25 W
Max. switching current:	2 (1) A
Switching element:	bimetallic contact
Sensor:	bimetal
Control range:	5 ... 30 °C
Hysteresis:	approx. 0.5 K at a temperature change of max. 4 K/h
General features:	mechanical range limitation; thermal feedback; external setting

Application

Control or monitoring of temperatures in closed spaces.

Valve actuator: normally closed. If normally open heating valves are available, they should be connected with the cooling output of the changeover switch (toggler).

Up to a maximum of 10 actuators for valves can be connected (normally closed, NC); with a toggler, on the NO contact, up to 5 units (in this context, please check the switching capacity listed in the technical specifications).












Installation note: Owing to the existing wiring space in the controller itself, installation on a flush-mounted socket is recommended, but it can also be performed on a plane, non-conducting substrate.

Explanations of technical terms can be found in the annex to the product catalogue or at www.alre.de.

Type/image	Item no.	Features	Circuit diagram	PG
	MA300000	General features: scale: degrees Celsius Operating voltage: 230 VAC, 50 Hz Protection class: II, if properly mounted Max. switching voltage: 230 VAC, 50 Hz Min. switching voltage: 230 VAC, 50 Hz Switching power: 460 W Switching contact: NC contact (max. 10 actuators) Output signal: switching (230 VAC, 50 Hz) Control function: heating		I
	MA300008	Like RTBSB-201.000 but with multi-digit display 1 ... 6		I
	MA300800	Like RTBSB-201.000 but with housing colour: Traffic/studio white, like RAL 9016		I
	MA300100	General features: ECO function; scale: Degrees Celsius Operating voltage: 230 VAC, 50 Hz Protection class: II, if properly mounted Max. switching voltage: 230 VAC, 50 Hz Min. switching voltage: 230 VAC, 50 Hz Switching power: 460 W Switching contact: NC contact (max. 10 actuators) Output signal: switching (230 VAC, 50 Hz) Control function: Heating Input “temperature reduction”: Approx. 3 K (230 VAC, 50 Hz)		I



Mechanical room temperature controller, RTBSB

Surface-mounted "ultra-thin" installation – Design Berlin 1000

Type/image	Item no.	Features	Circuit diagram	PG
	MA300200	<p>General features: scale: Degrees Celsius Operating voltage: 230 VAC, 50 Hz Protection class: II, if properly mounted Max. switching voltage: 230 VAC, 50 Hz Min. switching voltage: 230 VAC, 50 Hz Switching power: 460 W Switching contact: changeover switch (toggler, max. 10 actuators (NC contact), max. 5 actuators (NO contact)) Output signal: switching (230 VAC, 50 Hz) Control function: Heating or cooling</p>		I
	MA301400	<p>General features: "Heating" display; scale: Degrees Celsius Operating voltage: 230 VAC, 50 Hz Protection class: II, if properly mounted Max. switching voltage: 230 VAC, 50 Hz Min. switching voltage: 230 VAC, 50 Hz Switching power: 460 W Switching contact: NC contact (max. 10 actuators) Output signal: switching (230 VAC, 50 Hz) Control function: heating</p>		I
	MA300400	<p>General features: ECO function; "heating" display; Scale: Degrees Celsius; "on/off" switch Operating voltage: 230 VAC, 50 Hz Protection class: II, if properly mounted Max. switching voltage: 230 VAC, 50 Hz Min. switching voltage: 230 VAC, 50 Hz Switching power: 460 W Switching contact: NC contact (max. 10 actuators) Output signal: switching (230 VAC, 50 Hz) Control function: Heating Input "temperature reduction": Approx. 3 K (230 VAC, 50 Hz)</p>		I
	MA300500	<p>General features: Climate controller for 2-pipe systems, especially heat pumps; scale: Degrees Celsius; "heating/cooling" switch Operating voltage: 230 VAC, 50 Hz Protection class: II, if properly mounted Max. switching voltage: 230 VAC, 50 Hz Min. switching voltage: 230 VAC, 50 Hz Switching power: 460 W Switching contact: changeover switch (toggler, max. 5 actuators) Output signal: switching (230 VAC, 50 Hz) Control function: Heating or cooling</p>		I
	MA300502	<p>Like RTBSB-201.065 but with multi-digit display 1 ... 6</p>		I
	MA302100	<p>General features: ECO function; Scale: Degrees Celsius Operating voltage: 24 VAC, 50 Hz Protection class: III Max. switching voltage: 24 VAC, 50 Hz Min. switching voltage: 24 VAC, 50 Hz Switching power: 48 W Switching contact: NC contact (max. 5 actuators) Output signal: switching (24 VAC, 50 Hz) Control function: Heating Input "temperature reduction": Approx. 3 K (24 VAC, 50 Hz)</p>		I




Mechanical room temperature controller, RTBSB



Surface-mounted “ultra-thin” installation – Design Berlin 1000

Type/image	Item no.	Features	Circuit diagram	PG
	MA304000	<p>General features: 2-wire room temperature controller; multi-digit display *...6</p> <p>Operating voltage: 230 VAC, 50 Hz</p> <p>Ambient temperature: 0...30 °C</p> <p>Protection class: II, if properly mounted</p> <p>Max. switching current: 20 mA</p> <p>Min. switching current: 5 mA</p> <p>Max. switching voltage: 230 VAC, 50 Hz</p> <p>Min. switching voltage: 230 VAC, 50 Hz</p> <p>Switching power: 4.6 W (max. 2 actuators)</p> <p>Switching contact: NC contact</p> <p>Output signal: Switching (230 VAC, 50 Hz)</p> <p>Control function: heating</p> <p>Control range: 5...30 °C</p> <p>Hysteresis: Approx. 0.5 K at a temperature change of max. 4 K/h (load-dependent)</p>		I

Accessories: Terminal strips VOOxx, suitable valve actuators ZBOOA

You can find other/similar controllers with outputs for heating/cooling and noiseless controllers in the “Air Conditioning Technology” section.

Accessories	Item no.	Features	PG
	MN990006	Adapter frame for mounting room temperature controllers of the Berlin 1000 series in flush-mounted sockets up to 80 x 80 mm	I
	MA990000	Adjusting knob for B1000 series devices, scale: Degrees Celsius, pure white glossy	I
	MA990001	Adjusting knob for B1000 series devices, multi-digit display 1...6, pure white glossy	I

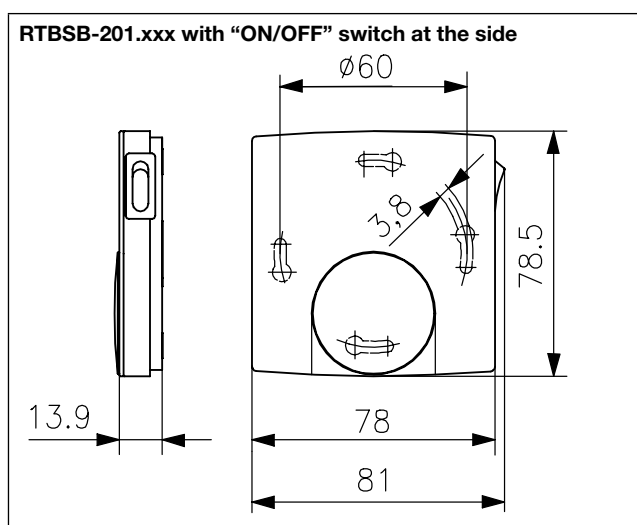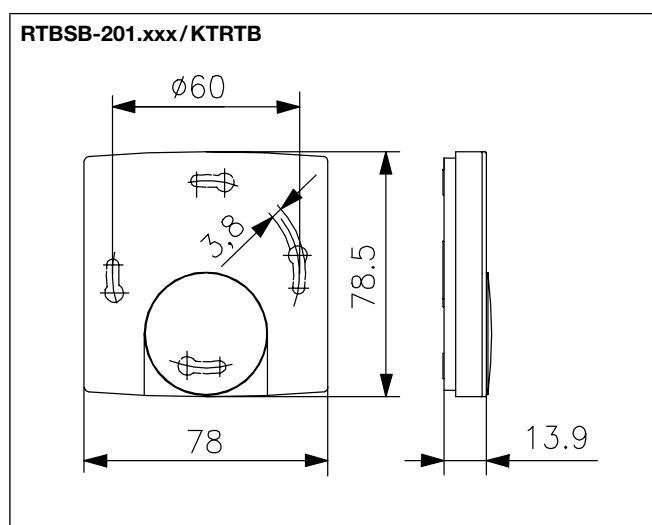

Mechanical room temperature controller, RTBSB

Surface-mounted or plug-in installation – Design Berlin



Technical data







Design:	Berlin 2000
Surface finish:	matt
Housing colour:	pure white, like RAL 9010
Housing material:	ABS plastic
Operating voltage:	230 VAC, 50 Hz
Ambient temperature:	0 ... 30 °C
Storage temperature:	-20 ... +70 °C
Permissible atmospheric humidity:	Max. 95% rel. humidity, non-condensing
Protection rating:	IP 30
Protection class:	II for loads of protection classes I and II
Safety and EMC:	according to DIN EN 60730
Max. switching voltage:	230 VAC, 50 Hz
Min. switching voltage:	230 VAC, 50 Hz
Switching element:	bimetallic contact
Switching contact:	NC contact
Output signal:	switching (230 VAC, 50 Hz)
Sensor:	bimetal
Control function:	heating
Control range:	5 ... 30 °C
Hysteresis:	approx. 1 K at a temperature change of max. 4 K/h

Application

For controlling the room temperature for radiators, heating chimneys, direct electric heating systems, marble heating systems etc.


Attention! For loads > 2,300 W, the wall socket must be designed for 16 A (danger of fire).




The plugs are designed in such a way that they can also be used in sockets with a central pin (for example, as used in France).

Type/image	Item no.	Features	Circuit diagram	PG
JZ-19 	MN990003	General features: plug-in socket (as with RTBSB-001.411/RTBSB-001.474) completely pre-wired Mounting/attachment: can be fitted with room thermostats RTBSB-001.xxx Protection rating: depends on the pre-fitted room thermostat Protection class: depends on the pre-fitted room thermostat Max. switching current: depends on the pre-fitted room thermostat Switching power: 3000 W		I
RTBSB-001.086 	MA010800	General features: Mechanical range setting; 3000 W switching power for electric direct heating systems, natural stone heating; thermal feedback; multi-digit display 1 ... 6; external setting Electrical connection: screw-type terminals 0.12 mm ² to 2.5 mm ² Average power consumption: < 0.5 W Max. switching current: 13 (4) A Switching power: 3000 W Accessories: can be combined with plug-in socket JZ-19		I
RTBSB-001.096 	MA012500	like RTBSB-001.086, but with "heating" display (LED red)		I
RTBSB-001.401 	MA013100	General features: mechanical range limitation; 3000 W switching power for electric direct heating systems, natural stone heating; multi-digit display 1 ... 6; external setting Electrical connection: Schuko adapters Mounting/attachment: optionally surface/wall mounting (4-hole assembly on flush-mounted socket) or with adapter plate (2-hole assembly) for wall hanging Average power consumption: < 0.1 W Max. switching current: 13 (4) A Switching power: 3000 W Connecting cable: 1.5 m		I

Mechanical room temperature controller, RTBSB

Surface-mounted or plug-in installation – Design Berlin

Type/image	Item no.	Features	Circuit diagram	PG
	MA013200	<p>General features: mechanical range limitation; 3000 W switching power for electric direct heating systems, natural stone heating; multi-digit display 1...6; external setting</p> <p>Electrical connection: pre-fitted Schuko plug-in socket JZ-19 at the controller, 1.5-m cable with Schuko coupling</p> <p>Mounting/attachment: ready-to-plug</p> <p>Average power consumption: < 0.1 W</p> <p>Max. switching current: 13 (4) A</p> <p>Switching power: 3000 W</p> <p>Hysteresis: Approx. 1 K at a temperature change of max. 4 K/h</p>		I

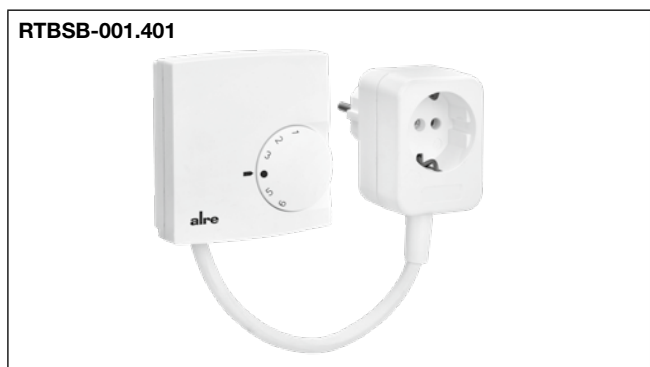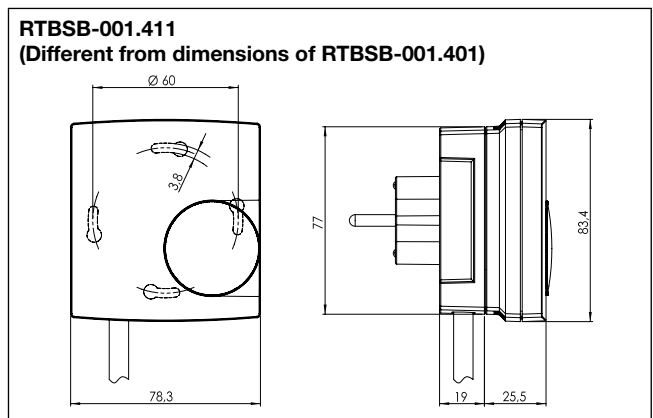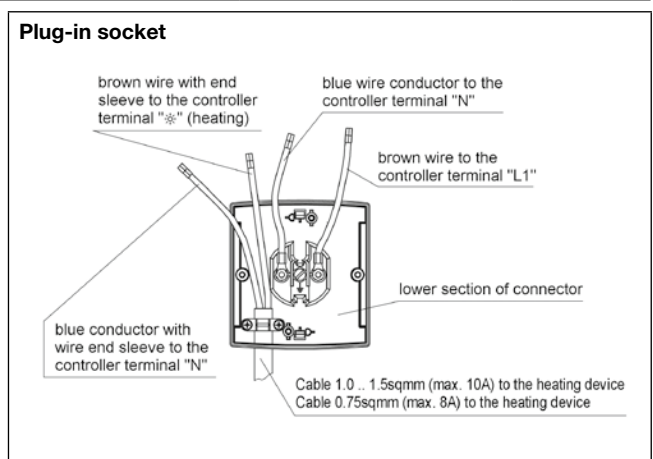

Electronic room temperature controller with clock, HTRRBu

Surface-mounted installation – Berlin 3000



Technical data

Design:	Berlin 3000
Surface finish:	matt
Housing colour:	pure white, like RAL 9010
Housing material:	ABS plastic
Operating voltage:	230 VAC, 50 Hz
Ambient temperature:	0 ... 30 °C
Storage temperature:	-20 ... +70 °C
Permissible atmospheric humidity:	Max. 95% rel. humidity, non-condensing
Electrical connection:	screw-type terminals
Mounting/attachment:	surface/wall mounting or by means of an adapter plate on a flush-mounted socket
Protection rating:	IP 30
Protection class:	II, if properly mounted
Safety and EMC:	according to DIN EN 60730
Max. switching current:	Heating (terminal 4) 8 (2) A, cooling (terminal 3) 100 mA
Max. switching voltage:	230 VAC, 50 Hz
Min. switching voltage:	230 VAC, 50 Hz
Switching power:	terminal 4: 1840 W, terminal 3: 23 W
Switching element:	relay
Switching contact:	NO contact
Output signal:	heating, switching (230 VAC, 50 Hz)
Sensor:	NTC
Control function:	heating
Control range:	5 ... 30 °C
Hysteresis:	< 1 K
Display type:	symbol display
Output "temperature reduction":	switching (230 VAC, 50 Hz) (for pilot function)

Application

For time-dependent control of temperatures in closed spaces. Suitable for all heating systems.

Valve actuator: normally closed.

It can be used as a master (pilot regulator) for the temperature reduction of other controllers. Controllers of series FETR, RTBSU and RTBSB are suitable as slaves (satellite controllers).

Programming procedures for every day, familiar from mechanical timers, by means of "electronic tabs". Shortest switching time 15 min.

Load setting: The control accuracy is influenced by the different levels of intrinsic heating of the controller depending on the magnitude of the heating load. By inputting the heating load, this influence is compensated and the control accuracy is retained.

General features:


Pilot function; ECO function, ECO value adjustable; "ECO" display; "on/off" display; "heating" display; digital actual value display; child-safe features; power reserve (approx. 4-7 days); load setting; actual value correction/measured value correction; learning function; valve protection; holiday setting; party setting; automatic adjustment to standard/daylight savings time; mechanical range limitation; scale: Degrees Celsius; reduction/comfort/automatic button; external setting; operation using direct-dial buttons; on/off button; information button; party function button; holiday setting button

Type/image	Item no.	Features	PG
HTRRBu 110.117/21	MA600003		I


Accessories	Item no.	Features	PG
JZ-17	MN990001	Surface finish: Matt Colour: pure white, like RAL 9010 Material: ABS plastic General features: adapter plate for mounting devices on flush-mounted sockets (including fastening screws for mounting the controller on the adapter plate)	II

Electronic room temperature controller with clock, HTRRBu

Surface-mounted installation – Berlin 3000

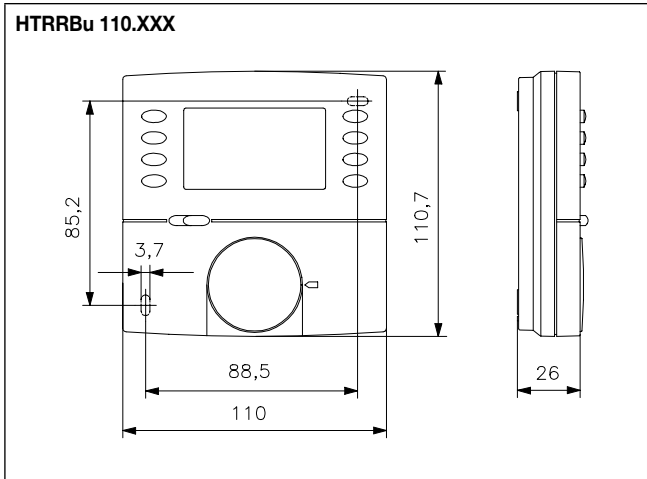

- Factory setting:**
- Setback temperature 17 °C
 - Continuous time display
 - Programme display using switching segments enabled
 - Child-safe features disabled
 - Automatic adjustment to standard/daylight savings time enabled
 - °C display, valve and pump protection disabled
 - Learning function disabled
 - Heating load 0.0 kW
 - Comfort times: Mon–Fri 5 am–9 am/4 pm–10 pm, Sat/Sun 6 am–10 pm

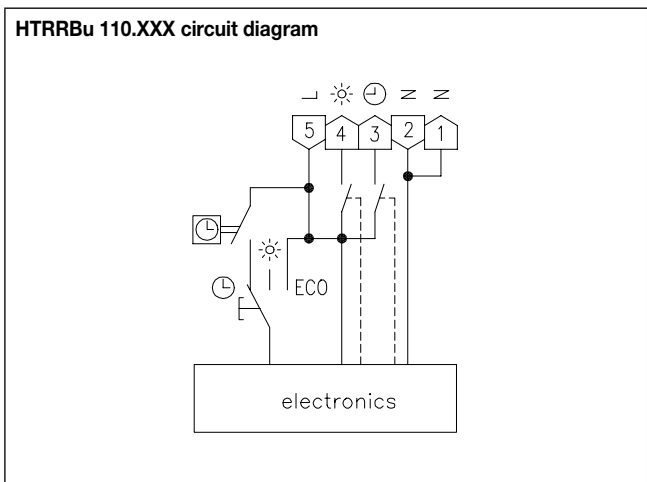

NEW at alre – FTR is now RTBSU: The next generation bimetal controller

Our FTR controller is now the RTBSU controller. The new and optimised room controller offers you a number of advantages that make mounting and attachment considerably easier. This can save you time, and above all, costs.

Your benefits at a glance

- Simple electrical connection without screws
- New terminals for quick and easy installation
- Simplified wiring through colour-coded terminals
- Time saving modular design: Practical installation sequence for controller, frame and cover
- Low installation volume for convenient and quick installation in the flush-mounted socket
- Temperature can be controlled even without a cover
- Closed design
- Optimal screw entry
- Multifunctional support ring for international use
- Suitable for all current switch ranges (50 mm and 55 mm cover set)
- Up to 30% subsidy with BAFA funding

Type comparison overview between old (FTR) and new (RTBSU):

Old item no.	Old type	New item no.	New type	Remarks
UA010017	FTR 101.000#00	UA090000	RTBSU-401.000#00	
UN010009	FTR 101.000#21	UA090014	RTBSU-401.000#21	
UA010134	FTR 101.002#00	UA090001	RTBSU-401.002#00	
UA010222	FTR 101.010#00	UA090002	RTBSU-401.010#00	
UA012404	FTR 101.034#07	UA090004	RTBSU-401.034#00	+ JZ-016.000
UA012405	FTR 101.034#55	UA090004	RTBSU-401.034#00	+ JZ-016.100
UA010702	FTR 101.052#21	UA090015	RTBSU-401.052#21	
UA010811	FTR 101.062#00	UA090003	RTBSU-401.062#00	
UA011000	FTR 101.063#00	UA090006	RTBSU-401.063#00	
UA010910	FTR 101.065#00	UA090007	RTBSU-401.065#00	
UA010415	FTR 101.075#00	UA090008	RTBSU-401.075#00	
UA010615	FTR 101.086#00	UA090009	RTBSU-401.086#00	
UN010607	FTR 101.086#21	UA090016	RTBSU-401.086#21	
UA012008	FTR 101.202#00	UA090010	RTBSU-401.202#00	
UN102009	FTR 101.202#21	UA090010	RTBSU-401.202#00	+ JZ-001.000 + JZ-090.900
UA012301	FTR 101.210#00	UA090011	RTBSU-401.210#00	
UA012500	FTR 101.262#00	UA090012	RTBSU-401.262#00	
UA012501	FTR 101.262#21	UA090012	RTBSU-401.262#00	+ JZ-002.000 + JZ-090.900
UA012600	FTR 101.265#00	UA090017	RTBSU-401.265#00	
UA013000	FTR 101.902#07	UA090013	RTBSU-401.902#07	

Mechanical room temperature controller, RTBSU (previously FTR)

NEW

Flush-mounted installation – Design Berlin UP



Technical data

Design:	Berlin UP (flush-mounted)
Housing material:	PA6 plastic
Ambient temperature:	0 ... 30 °C
Storage temperature:	-20 ... +70 °C
Permissible atmospheric humidity:	Max. 95% rel. humidity, non-condensing
Electrical connection:	Spring-loaded terminals (lever actuation type)
Mounting/attachment:	in flush-mounted socket – with cover set 50 x 50 mm or 55 x 55 mm, can be used with almost all switch ranges (deep flush-mounted socket recommended)
Protection rating:	IP 30
Protection class:	II, if properly mounted, with 24 VAC, protection class III according to DIN EN 60730
Safety and EMC:	
Max. power consumption:	< 0.5 W
Switching element:	bimetallic contact
Output signal:	switching
Sensor:	bimetal
Control range:	5 ... 30 °C
Setting range:	5 ... 30 °C
Hysteresis:	approx. 0.5 K at a temperature change of max. 4 K/h
General features:	thermal feedback; multi-digit display * ... 6

Application




Control or monitoring of temperatures in closed, dry spaces. Suitable for all heating systems.

Valve actuator: normally closed. If normally open heating valves are available, they should be connected to the cooling output of the changeover switch (toggler), e.g., RTBSU-401.010

Up to a maximum of 10 actuators for valves can be connected (normally closed, NC); up to 5 units on the toggler with a NO contact.

The basic controllers (RTBSU-401.xxx#00) in combination with a 55 x 55 mm cover set fit visually perfectly in many switch ranges without the use of an insert frame.

The basic controllers (RTBSU-401.xxx#00) in combination with a 50 x 50 mm cover set fit in nearly all switch ranges with the use of an insert frame.







Type/image	Item no.	Features	Circuit diagram	PG
RTBSU-401.000#00 Predecessor type: FTR 101.000#00 	UA090000	General features: Mechanical range limitation; external setting; protective cap; VDE-tested Operating voltage: 230 VAC, 50 Hz Max. switching current: 10 (4) A Max. switching voltage: 230 VAC, 50 Hz Min. switching voltage: 230 VAC, 50 Hz Switching power: 2300 W Switching contact: NC contact (max. 10 actuators) Control function: Heating Cover sets are offered in various designs (see the separate overview, "alre flush-mounted range (cover sets)") and are not included in the delivery. Suitable set no: JZ-001.xxx, (see page 82/83) e.g.: cover set 50 x 50 mm, pure white, glossy: JZ-001.000 cover set 55 x 55 mm, pure white, glossy: JZ-001.100 BUSCH-JAEGER cover set Reflex SI/SI Linear, pure white, glossy: JZ-001.200/BJ		I
RTBSU-401.000#21 Predecessor type: FTR 101.000#21 	UA090014	like RTBSU-401.000#00 but scope of delivery as follows: Controller, alre frame "Berlin" (neutral), cover 50 x 50 mm, pure white (like RAL 9010), glossy		I

NEW

Mechanical room temperature controller, RTBSU (previously FTR)

NEW









Flush-mounted installation – Design Berlin UP

Type/image	Item no.	Features	Circuit diagram	PG
	RTBSU-401.002#00 UA090001 Predecessor type: FTR 101.002#00	General features: ECO function; mechanical range limitation; external setting; protective cap; VDE-tested Operating voltage: 230 VAC, 50 Hz Max. switching current: 10 (4) A Max. switching voltage: 230 VAC, 50 Hz Min. switching voltage: 230 VAC, 50 Hz Switching power: 2300 W Switching contact: NC contact (max. 10 actuators) Control function: Heating Input "temperature reduction": Approx. 4 K (230 VAC, 50 Hz)		I
	RTBSU-401.010#00 UA090002 Predecessor type: FTR 101.010#00	General features: ECO function; mechanical range limitation; external setting; protective cap; VDE-tested Operating voltage: 230 VAC, 50 Hz Max. switching current: heating terminal 10 (4) A, cooling terminal 5 (2) A, Max. switching voltage: 230 VAC, 50 Hz Min. switching voltage: 230 VAC, 50 Hz Switching power: heating terminal: 2300 W, Cooling terminal: 1150 W Switching contact: changeover switch (toggler, max. 10 actuators output heating, max. 5 actuators output cooling) Control function: Heating or cooling Input "temperature reduction": Approx. 4 K (230 VAC, 50 Hz)		I
	RTBSU-401.034#00 UA090004 Predecessor type: FTR 101.034#07/ FTR 101.034#55	General features: "Heating" display; mechanical range limitation; external setting; Operating voltage: 230 VAC, 50 Hz Max. switching current: 10 (4) A Max. switching voltage: 230 VAC, 50 Hz Min. switching voltage: 230 VAC, 50 Hz Switching power: 2300 W Switching contact: NC contact (max. 10 actuators) Control function: Heating		I

Mechanical room temperature controller, RTBSU (previously FTR)

NEW









Flush-mounted installation – Design Berlin UP

Type/image	Item no.	Features	Circuit diagram	PG
<p>RTBSU-401.052#21 UA090015 Predecessor type: FTR 101.052#21</p> 		<p>General features: “Auxiliary heating” display; mechanical range limitation; auxiliary heating switch; external setting Operating voltage: 230 VAC, 50 Hz Max. switching current: the total current (heating + auxiliary heating) may not exceed 10 (4) A Max. switching voltage: 230 VAC, 50 Hz Min. switching voltage: 230 VAC, 50 Hz Switching power: the total power output (heating + auxiliary heating) may not exceed 2300 W Switching contact: NC contact (max. 10 actuators) Control function: Heating Scope of delivery: controller, alre frame “Berlin” (neutral), cover 50 x 50 mm, pure white (like RAL 9010), glossy</p>		I
<p>RTBSU-401.062#00 UA090003 Predecessor type: FTR 101.062#00</p> 		<p>General features: ECO function; “heating” display; mechanical range limitation; “on/off” switch; external setting; protective cap; VDE-tested Operating voltage: 230 VAC, 50 Hz Max. switching current: 10 (4) A Max. switching voltage: 230 VAC, 50 Hz Min. switching voltage: 230 VAC, 50 Hz Switching power: 2300 W Switching contact: NC contact (max. 10 actuators) Control function: Heating Input “temperature reduction”: Approx. 4 K (230 VAC, 50 Hz)</p> <p>Cover sets are offered in various designs (see the separate overview, “alre flush-mounted range (cover sets)”) and are not included in the delivery. Suitable set no: JZ-002.xxx, (see page 82/83) e.g.: cover set 50 x 50 mm, pure white, glossy: JZ-002.000 cover set 55 x 55 mm, pure white, glossy: JZ-002.100 BUSCH-JAEGER cover set Reflex SI/SI Linear, pure white, glossy: JZ-002.200/BJ</p>		I
<p>RTBSU-401.063#00 UA090006 Predecessor type: FTR 101.063#00</p> 		<p>General features: Climate controller for 2-pipe systems, mechanical range limitation; “heating/off/cooling” switch; external adjustment; protective cap Operating voltage: 230 VAC, 50 Hz Max. switching current: 5 (2) A Max. switching voltage: 230 VAC, 50 Hz Min. switching voltage: 230 VAC, 50 Hz Switching power: 1150 W Switching contact: changeover switch (max. 5 actuators) Control function: Heating or cooling</p> <p>For cover sets see the separate overview “alre flush-mounted range (cover sets)”, not included in the delivery. Suitable set no: JZ-012.xxx, (see page 82/83) e.g.: cover set 50 x 50 mm, pure white, glossy: JZ-012.000 cover set 55 x 55 mm, pure white, glossy: JZ-012.100</p>		I
<p>RTBSU-401.065#00 UA090007 Predecessor type: FTR 101.065#00</p> 		<p>General features: Climate controller for 2-pipe systems, especially heat pumps; mechanical range limitation; “heating/cooling” switch; external setting; protective cap Operating voltage: 230 VAC, 50 Hz Max. switching current: 5 (2) A Max. switching voltage: 230 VAC, 50 Hz Min. switching voltage: 230 VAC, 50 Hz Switching power: 1150 W Switching contact: changeover switch (toggler, max. 5 actuators) Control function: Heating or cooling</p> <p>Cover sets are offered in various designs (see the separate overview, “alre flush-mounted range (cover sets)”) and are not included in the delivery. Suitable set no: JZ-004.xxx, (see page 82/83) e.g.: cover set 50 x 50 mm, pure white, glossy: JZ-004.000 cover set 55 x 55 mm, pure white, glossy: JZ-004.100</p>		I

Mechanical room temperature controller, RTBSU (previously FTR)

NEW

Flush-mounted installation – Design Berlin UP







Type/image	Item no.	Features	Circuit diagram	PG
<p>RTBSU-401.075#00 UA090008 Predecessor type: FTR 101.075#00</p> 		<p>General features: ECO function; “reduction” display; mechanical range limitation; “reduction/heating/reduction via external timer” switch; external setting; protective cap; VDE-tested Operating voltage: 230 VAC, 50 Hz Max. switching current: 10 (4) A Max. switching voltage: 230 VAC, 50 Hz Min. switching voltage: 230 VAC, 50 Hz Switching power: 2300 W Switching contact: NC contact (max. 10 actuators) Control function: Heating Input “temperature reduction”: Approx. 4 K (230 VAC, 50 Hz)</p> <p>Cover sets are offered in various designs (see the separate overview, “alre flush-mounted range (cover sets)”) and are not included in the delivery. Suitable set no: JZ-003.xxx, (see page 82/83) e.g.: cover set 50 x 50 mm, pure white, glossy: JZ-003.000 cover set 55 x 55 mm, pure white, glossy: JZ-003.100</p>		I
<p>RTBSU-401.086#00 UA090009 Predecessor type: FTR 101.086#00</p> 		<p>General features: Mechanical range limitation; 3000 W switching power, for electric direct heating systems, natural stone heating; external setting; protective cap Operating voltage: 230 VAC, 50 Hz Max. switching current: 13 (4) A Max. switching voltage: 230 VAC, 50 Hz Min. switching voltage: 230 VAC, 50 Hz Switching power: 3000 W Switching contact: NC contact Control function: Heating</p> <p>Cover sets are offered in various designs (see the separate overview, “alre flush-mounted range (cover sets)”) and are not included in the delivery. Suitable set no: JZ-001.xxx, (see page 82/83) e.g.: cover set 50 x 50 mm, pure white, glossy: JZ-001.000 cover set 55 x 55 mm, pure white, glossy: JZ-001.100 BUSCH-JAEGER cover set Reflex SI/SI Linear, pure white, glossy: JZ-001.200/BJ</p>		I
<p>RTBSU-401.086#21 UA090016 Predecessor type: FTR 101.086#21</p> 		<p>like RTBSU-401.086#00 but scope of delivery as follows: Controller, alre frame “Berlin” (neutral), cover 50 x 50 mm, pure white (like RAL 9010), glossy</p>		I
<p>RTBSU-401.202#00 UA090010 Predecessor type: FTR 101.202#00</p> 		<p>General features: ECO function; mechanical range limitation; external setting; protective cap Operating voltage: 24 VAC/50 Hz, 24 VDC Max. switching current: 1 (1) A Max. switching voltage: 24 VAC/50 Hz, 24 VDC Min. switching voltage: 24 VAC/50 Hz, 24 VDC Switching power: 24 W Switching contact: NC contact (max. 5 actuators) Control function: Heating Input “temperature reduction”: Approx. 4 K (24 VAC/50 Hz, 24 VDC)</p> <p>Cover sets are offered in various designs (see the separate overview, “alre flush-mounted range (cover sets)”) and are not included in the delivery. Suitable set no: JZ-001.xxx, (see page 82/83) e.g.: cover set 50 x 50 mm, pure white, glossy: JZ-001.000 cover set 55 x 55 mm, pure white, glossy: JZ-001.100 BUSCH-JAEGER cover set Reflex SI/SI Linear, pure white, glossy: JZ-001.200/BJ</p>		I

Heating technology

Mechanical room temperature controller, RTBSU (previously FTR)



NEW

Flush-mounted installation – Design Berlin UP

Type/image	Item no.	Features	Circuit diagram	PG
<p>RTBSU-401.210#00 UA090011 Predecessor type: FTR 101.210#00</p> 		<p>General features: ECO function; mechanical range limitation; external setting; protective cap Operating voltage: 24 VAC/50 Hz, 24 VDC Max. switching current: 1 (1) A Max. switching voltage: 24 VAC/50 Hz, 24 VDC Min. switching voltage: 24 VAC/50 Hz, 24 VDC Switching power: 24 W Switching contact: changeover switch (toggler, max. 5 actuators) Control function: Heating or cooling Input "temperature reduction": Approx. 4 K (24 VAC/50 Hz, 24 VDC)</p> <p>Cover sets are offered in various designs (see the separate overview, "alre flush-mounted range (cover sets)") and are not included in the delivery. Suitable set no: JZ-001.xxx, (see page 82/83) e.g.: cover set 50 x 50 mm, pure white, glossy: JZ-001.000 cover set 55 x 55 mm, pure white, glossy: JZ-001.100 BUSCH-JAEGER cover set Reflex SI/SI Linear, pure white, glossy: JZ-001.200/BJ</p>		I
<p>RTBSU-401.262#00 UA090012 Predecessor type: FTR 101.262#00</p> 		<p>General features: ECO function; "heating" display; mechanical range limitation; "on/off" switch; external setting; protective cap Operating voltage: 24 VAC/50 Hz Max. switching current: 1 (1) A Max. switching voltage: 24 VAC/50 Hz Min. switching voltage: 24 VAC/50 Hz Switching power: 24 W Switching contact: NC contact (max. 5 actuators) Control function: Heating Input "temperature reduction": Approx. 4 K (24 VAC/50 Hz)</p> <p>Cover sets are offered in various designs (see the separate overview, "alre flush-mounted range (cover sets)") and are not included in the delivery. Suitable set no: JZ-002.xxx, (see page 82/83) e.g.: cover set 50 x 50 mm, pure white, glossy: JZ-002.000 cover set 55 x 55 mm, pure white, glossy: JZ-002.100 BUSCH-JAEGER cover set Reflex SI/SI Linear, pure white, glossy: JZ-002.200/BJ</p>		I
<p>RTBSU-401.265#00 UA090017 Predecessor type: FTR 101.265#00</p> 		<p>General features: Climate controller for 2-pipe systems, especially heat pumps; mechanical range restriction; "Heating/cooling" switch; external setting; protection cap Operating voltage: 24 VAC/50 Hz, 24 VDC Max. switching current: 1 (1) A Max. switching voltage: 24 VAC/50 Hz, 24 VDC Min. switching voltage: 24 VAC/50 Hz, 24 VDC Switching power: 24 W Switching contact: changeover switch (toggler, max. 5 actuators) Control function: Heating or cooling</p> <p>Cover sets are offered in various designs (see the separate overview, "alre flush-mounted range (cover sets)") and are not included in the delivery. Suitable set no: JZ-004.xxx, (see page 82/83) e.g.: cover set 50 x 50 mm, pure white, glossy: JZ-004.000 cover set 55 x 55 mm, pure white, glossy: JZ-004.100</p>		I


Mechanical room temperature controller, RTBSU (previously FTR)




Flush-mounted installation – Design Berlin UP

Type/image	Item no.	Features	Circuit diagram	PG
RTBSU-401.902#07 Predecessor type: FTR 101.902#07 	UA090013	General features: ECO function; internal setting Operating voltage: 230 VAC, 50 Hz Max. switching current: 10 (4) A Max. switching voltage: 230 VAC, 50 Hz Min. switching voltage: 230 VAC, 50 Hz Switching power: 2300 W Switching contact: NC contact (max. 10 actuators) Control function: Heating Input "temperature reduction": Approx. 4 K (230 VAC, 50 Hz) Scope of delivery: Controller, cover 50 x 50 mm, pure white (like RAL 9010), glossy		I

For model RTBSU-401.xxx#21, the contact hazard protection cover plate and protective cap are not included in the delivery.

Accessories: terminal strips VOOxx, suitable valve actuators ZBOOA, suitable cover sets: see separate overview "alre flush-mounting range (cover sets)"

Type/image	Item no.	Features	PG
JZ-090.900 	VV000025	General features: alre frame "Berlin" (neutral) for all flush-mounted controllers with cover 50 x 50 mm Design: Berlin Surface finish: Glossy Colour: Pure white, like RAL 9010 Material: PC plastic	I
JZ-090.910	VV000010	as for JZ-090.900, but colour like RAL 1013	I

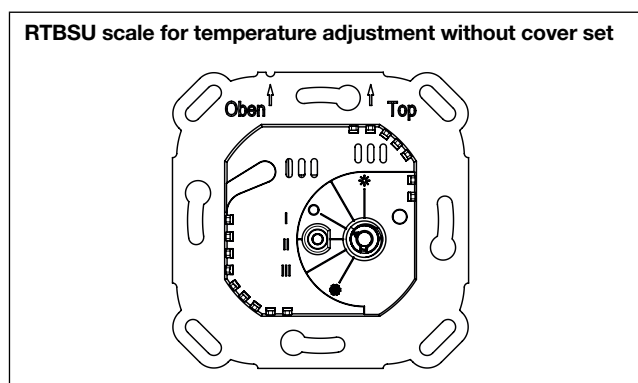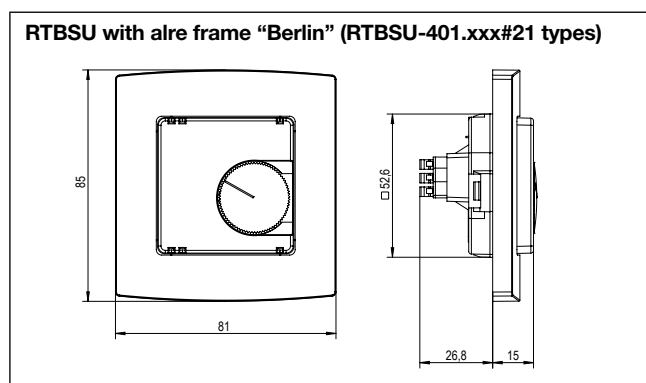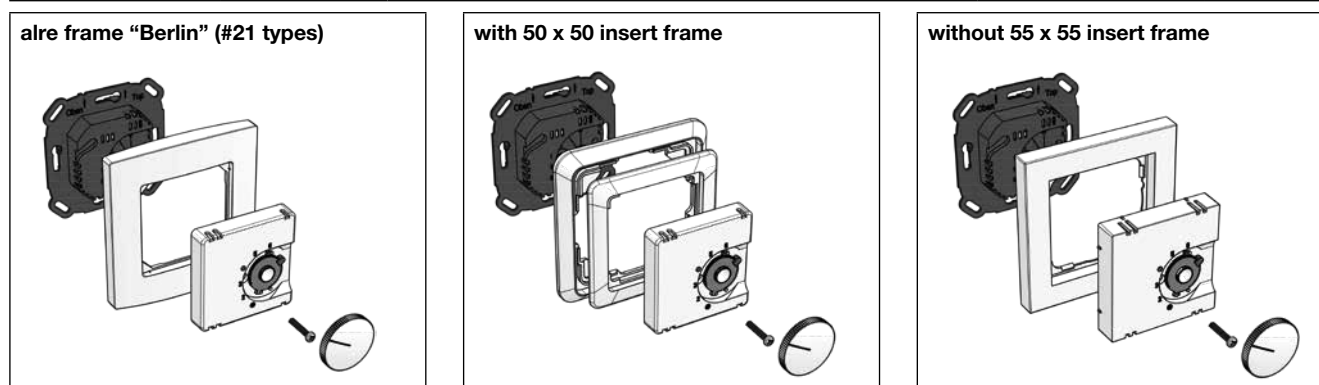

alre flush-mounted range (cover sets 50 x 50 mm)

all basic types and suitable cover sets 50 x 50 mm


Basic type	Cover set 50 x 50 mm pure white (RAL 9010) glossy (JZ-xxx.000)		Cover set 50 x 50 mm pure white (RAL 9010) matt (JZ-xxx.001)		Cover set 50 x 50 mm pearl white (RAL 1013) glossy (JZ-xxx.010)		PG
	Cover set	Item no.	Cover set	Item no.	Cover set	Item no.	
RTBSU-401.000#00	JZ-001.000	UN990035	JZ-001.001	UN990040	JZ-001.010	UN990045	I
RTBSU-401.002#00	JZ-001.000	UN990035	JZ-001.001	UN990040	JZ-001.010	UN990045	I
RTBSU-401.010#00	JZ-001.000	UN990035	JZ-001.001	UN990040	JZ-001.010	UN990045	I
RTBSU-401.034#00	JZ-016.000	UN990139	-	-	-	-	I
RTBSU-401.062#00	JZ-002.000	UN990036	JZ-002.001	UN990041	JZ-002.010	UN990046	I
RTBSU-401.063#00	JZ-012.000	UN990107	JZ-012.001	UN990132	JZ-012.010	UN990133	I
RTBSU-401.065#00	JZ-004.000	UN990037	JZ-004.001	UN990042	JZ-004.010	UN990047	I
RTBSU-401.075#00	JZ-003.000	UN990038	JZ-003.001	UN990043	JZ-003.010	UN990048	I
RTBSU-401.086#00	JZ-001.000	UN990035	JZ-001.001	UN990040	JZ-001.010	UN990045	I
RTBSU-401.202#00	JZ-001.000	UN990035	JZ-001.001	UN990040	JZ-001.010	UN990045	I
RTBSU-401.210#00	JZ-001.000	UN990035	JZ-001.001	UN990040	JZ-001.010	UN990045	I
RTBSU-401.262#00	JZ-002.000	UN990036	JZ-002.001	UN990041	JZ-002.010	UN990046	I
RTBSU-401.265#00	JZ-004.000	UN990037	JZ-004.001	UN990042	JZ-004.010	UN990047	I

In flush-mounted socket, it can be adapted to fit virtually any switch range.

See the product finder on pages 87 –93 for all cover solutions and special colours

Basic type	Cover set 50 x 50 mm traffic/studio white (RAL 9016) glossy (JZ-xxx.020)		Cover set 50 x 50 mm traffic/studio white (RAL 9016) matt (JZ-xxx.021)		PG
	Cover set	Item no.	Cover set	Item no.	
RTBSU-401.000#00	JZ-001.020	UN990071	JZ-001.021	UN990100	I
RTBSU-401.002#00	JZ-001.020	UN990071	JZ-001.021	UN990100	I
RTBSU-401.010#00	JZ-001.020	UN990071	JZ-001.021	UN990100	I
RTBSU-401.062#00	JZ-002.020	UN990072	JZ-002.021	UN990101	I
RTBSU-401.063#00	JZ-012.020	UN990134	JZ-012.021	UN990135	I
RTBSU-401.065#00	JZ-004.020	UN990073	JZ-004.021	UN990103	I
RTBSU-401.075#00	JZ-003.020	UN990074	JZ-003.021	UN990102	I
RTBSU-401.086#00	JZ-001.020	UN990071	JZ-001.021	UN990100	I
RTBSU-401.202#00	JZ-001.020	UN990071	JZ-001.021	UN990100	I
RTBSU-401.210#00	JZ-001.020	UN990071	JZ-001.021	UN990100	I
RTBSU-401.262#00	JZ-002.020	UN990072	JZ-002.021	UN990101	I
RTBSU-401.265#00	JZ-004.020	UN990073	JZ-004.021	UN990103	I

Cover set (example), individually foil-wrapped

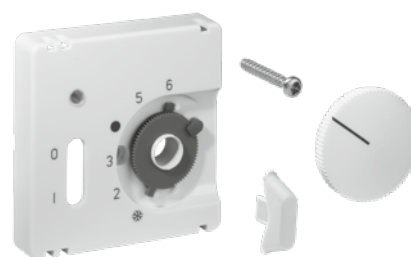

alre flush-mounted range (cover sets 55 x 55 mm)

all basic types and suitable cover sets 55 x 55 mm

Basic type	Cover set 55x55 mm pure white (RAL 9010) glossy (JZ-xxx.100)		Cover set 55x55 mm pure white (RAL 9010) matt (JZ-xxx.101)		Design 55 x 55 mm pearl white (RAL1013) glossy (JZ-xxx.110)		PG	Cover set 55x55 mm traffic / studio white (RAL 9016) glossy (JZ-xxx.120)		PG
	Cover set	Item no.	Cover set	Item no.	Cover set	Item no.		Cover set	Item no.	
RTBSU-401.000#00	JZ-001.100	UN990050	JZ-001.101	UN990055	JZ-001.110	UN990060	I	JZ-001.120	UN990086	I
RTBSU-401.002#00	JZ-001.100	UN990050	JZ-001.101	UN990055	JZ-001.110	UN990060	I	JZ-001.120	UN990086	I
RTBSU-401.010#00	JZ-001.100	UN990050	JZ-001.101	UN990055	JZ-001.110	UN990060	I	JZ-001.120	UN990086	I
RTBSU-401.034#00	JZ-016.100	UN990140	-	-	-	-	I	-	-	I
RTBSU-401.062#00	JZ-002.100	UN990051	JZ-002.101	UN990056	JZ-002.110	UN990061	I	JZ-002.120	UN990088	I
RTBSU-401.063#00	JZ-012.100	UN990123	JZ-012.101	UN990136	JZ-012.110	UN990137	I	JZ-012.120	UN990138	I
RTBSU-401.065#00	JZ-004.100	UN990052	JZ-004.101	UN990057	JZ-004.110	UN990062	I	JZ-004.120	UN990089	I
RTBSU-401.075#00	JZ-003.100	UN990053	JZ-003.101	UN990058	JZ-003.110	UN990063	I	JZ-003.120	UN990090	I
RTBSU-401.086#00	JZ-001.100	UN990050	JZ-001.101	UN990055	JZ-001.110	UN990060	I	JZ-001.120	UN990086	I
RTBSU-401.202#00	JZ-001.100	UN990050	JZ-001.101	UN990055	JZ-001.110	UN990060	I	JZ-001.120	UN990086	I
RTBSU-401.210#00	JZ-001.100	UN990050	JZ-001.101	UN990055	JZ-001.110	UN990060	I	JZ-001.120	UN990086	I
RTBSU-401.262#00	JZ-002.100	UN990051	JZ-002.101	UN990056	JZ-002.110	UN990061	I	JZ-002.120	UN990088	I
RTBSU-401.265#00	JZ-004.100	UN990052	JZ-004.101	UN990057	JZ-004.110	UN990062	I	JZ-004.120	UN990089	I

Can be adapted to fit many switch ranges in flush-mounted sockets (for a current overview of the suitable frames and insert frames, see page 86).

All basic types and suitable cover sets for **BUSCH-JAEGER Reflex SI/SI Linear/ Busch-Duro 2000 SI/future/solo/axcent/carat** without insert frame



Basic type	Cover set BUSCH-JAEGER Reflex SI/SI Linear pure white (RAL 9010) glossy (JZ-xxx.200/BJ)		Cover set BUSCH-JAEGER Busch-Duro 2000 SI/SI Linear pearl white (RAL 1013) glossy (JZ-001.210/BJ)		PG	Cover set BUSCH-JAEGER future linear/solo/axcent/ carat traffic/studio white (RAL 9016) glossy (JZ-001.320/BJ)		PG
	Cover set	Item no.	Cover set	Item no.		Cover set	Item no.	
RTBSU-401.000#00	JZ-001.200/BJ	G9990490	JZ-001.210/BJ	G9990491	I	JZ-001.320/BJ	G9990493	I
RTBSU-401.002#00	JZ-001.200/BJ	G9990490	JZ-001.210/BJ	G9990491	I	JZ-001.320/BJ	G9990493	I
RTBSU-401.010#00	JZ-001.200/BJ	G9990490	JZ-001.210/BJ	G9990491	I	JZ-001.320/BJ	G9990493	I
RTBSU-401.062#00	JZ-002.200/BJ	G9990492	-	-	I	-	-	I
RTBSU-401.086#00	JZ-001.200/BJ	G9990490	JZ-001.210/BJ	G9990491	I	JZ-001.320/BJ	G9990493	I
RTBSU-401.202#00	JZ-001.200/BJ	G9990490	JZ-001.210/BJ	G9990491	I	JZ-001.320/BJ	G9990493	I

Can be adapted to fit the corresponding BUSCH-JAEGER switch ranges in flush-mounted sockets.

Special colours aluminium/anthracite

alre controller types	Manufacturer Switch range	Colour/ surface finish	50 x 50 mm insert frame*	alre cover set: Type (Item no.)	PG
FTR 101.000#00 FTR 101.002#00 FTR 101.010#00	BERKER S.1/B.3/B.7	aluminium/matt	not required	JZ-001.131/BE (UN990114)	I
		anthracite/matt	not required	JZ-001.141/BE (UN990115)	I
FTR 101.086#00 FTR 101.202#00 FTR 101.210#00	BUSCH-JAEGER future linear	aluminium silver/glossy	1746/10-83	JZ-001.030/BJ (UN990108)	I
		anthracite/glossy	1746/10-81	JZ-001.040/BJ (UN990109)	I
	GIRA System 55	aluminium/matt	not required	JZ-001.131/GI (UN990110)	I
		anthracite/matt	not required	JZ-001.141/GI (UN990111)	I
	JUNG Series A	aluminium/glossy	not required	JZ-001.130/JU (UN990112)	I
		anthracite/matt	not required	JZ-001.141/JU (UN990113)	I
	MERTEN System M	aluminium/matt	not required	JZ-001.131/ME (UN990116)	I
		anthracite/matt	not required	JZ-001.141/ME (UN990117)	I

*) must be ordered from switch manufacturer or electronics wholesaler

Further details and information on cover sets in white tones can be found online at www.alre.de or in the catalogue.

alre



Adaptation examples BERKER



Adaptation examples BUSCH-JAEGER



Controllers for all
switch ranges

Integration examples in switch ranges with or without insert frame




Adaptation examples GIRA



Adaptation examples JUNG



Adaptation examples MERTEN

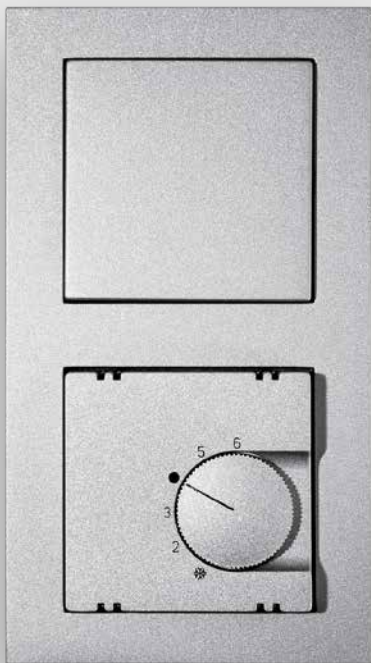

See page 96 for further 55 x 55 mm adaptation examples

Adaptation of alre flush-mounted controllers

Manufacturer	Range	Colour RAL 9010 (surface finish)	Adaptation using "55 x 55" or "BJ" cover sets possible (without insert frame)	Only adaptation with "50 x 50" cover set requires an insert frame from the manufacturer
BERKER	S.1	polar white (matt)	✓	1109 19 19
BERKER	S.1	polar white (glossy)	✓	1109 90 89
BERKER	Arsys	polar white (glossy)		1108 01 69
BERKER	B.3	aluminium/polar white (matt)	✓	1109 19 19
BERKER	B.3	aluminium/polar white (glossy)	✓	1109 90 89
BERKER	B.7	glass/polar white (matt)	✓	1109 19 19
BERKER	B.7	glass/polar white (glossy)	✓	1109 90 89
BERKER	Q.1/Q.3	polar white (velvet)		1109 60 79
BERKER	K.1	polar white (glossy)		1108 71 09
BUSCH-JAEGER	Reflex SI/SI Linear	alpine white (glossy)	✓	1746-214-101
BUSCH-JAEGER	Busch-balance SI	alpine white (glossy)	✓	1746-914-101
BUSCH-JAEGER	impuls	alpine white (glossy)		1746/10-74
BUSCH-JAEGER	solo/future linear/axcent/etc.	studio white – see RAL 9016 below		
ELSO	Joy	pure white (glossy)	✓	363084
ELSO	Fashion/Riva/Scala	pure white (glossy)		203084
GIRA	surface switch	pure white (glossy)		0282 112
GIRA (System 55)	Standard/E2	pure white (semi-gloss)	✓	0282 27
GIRA (System 55)	Standard/E2/E3	pure white (glossy)	✓	0282 03
GIRA (System 55)	E22	pure white (glossy)	✓	0282 03
GIRA (System 55)	Event	pure white (semi-gloss) + opaque...	✓	0282 27
GIRA (System 55)	Event	pure white (glossy) + opaque...	✓	0282 03
GIRA (System 55)	Esprit	pure white (semi-gloss) + glass, aluminium...	✓	0282 27
GIRA (System 55)	Esprit	pure white (glossy) + glass, aluminium...	✓	0282 03
GIRA	S-Color	pure white (high-gloss)		0282 40
JUNG	CD 500/CD plus	alpine white (glossy)		CD 590 Z WW
JUNG	A 500/A 550/AS 500/A plus/A flow	alpine white (glossy)	✓	A 590 Z WW
JUNG	LS 990	alpine white (glossy)		LS 961 Z WW
JUNG	LS plus	alpine white (glass)		LS 961 Z WW
JUNG	A creation	alpine white (glossy)	✓	A 590 Z WW
JUNG	LS Design	alpine white (glossy)		LS 961 Z WW
MERTEN (System M)	M-Smart, M-Plan, M-Pure	polar white (matt)	✓	5181 19
MERTEN (System M)	M-Smart, M-Plan, M-Creativ, M-Pure	polar white (glossy)	✓	5185 19
MERTEN (Basis System)	1-M/Atelier-M	polar white (glossy)	✓	5185 19
MERTEN (Surface System)	Artec/Antik	polar white (glossy)		5160 99
MERTEN	1-M/M-Smart/M-Plan/M-Pure/D-Life	active white – see RAL 9016 below or product finder		
PEHA	Standard	pure white (glossy)		80.670.02 ZV
PEHA	Dialog	pure white (glossy)		95.670.02 ZV
PEHA	Aura	pure white (matt)/glass		20.670.02 ZV
PEHA	Badora	pure white (glossy)		11.670.02 ZV

Manufacturer	Range	Colour RAL 9016 (surface finish)	Adaptation using 55 x 55 or BJ cover sets possible (without insert frame)	Only adaptation with "50 x 50" cover set requires an insert frame from the manufacturer
BUSCH-JAEGER	solo/future linear	studio white (RAL 9016, glossy)	✓	1746/10-84
BUSCH-JAEGER	future linear	studio white (RAL 9016 matt)		1746/10-884
BUSCH-JAEGER	impuls	studio white (RAL 9016 matt)		1746/10-774
BUSCH-JAEGER	axcent	studio white (RAL 9016, glossy)	✓	1746/10-84
BUSCH-JAEGER	carat (glass, bronze, gold)	studio white (RAL 9016, glossy)	✓	1746/10-84
BUSCH-JAEGER	alpha (nea/exclusive*)	studio white (RAL 9016, glossy)		1746/10-24G
BUSCH-JAEGER	alpha (nea/exclusive*)	studio white (RAL 9016 matt)		1746/10-24
MERTEN	M-Smart, M-Plan, M-Pure	active white (RAL 9016, glossy)	✓	5185 25
MERTEN	1-M/Atelier-M	active white (RAL 9016, glossy)	✓	5185 25
MERTEN	D-Life	lotus white (RAL 9016)		MEG4500-6035
PEHA	Standard	arctic		D 80.670 ZV AW

*) During assembly, you need to remove 4 plastic tabs located at the rear of the frame

NOTE: Most light switch ranges are designed in a colour like RAL 9010, although different switch manufacturers use different designations for this colour. Coloured, glass and aluminium frames are also combined with white jacks or plugs so that controllers with white covers can also be integrated into these frames. Check the precise application in each individual case. The frames have different surface qualities (matt/glossy). For design reasons, the cover of the controller should have the same quality as the frame. We accept no liability for slight variations in colour and surface finish or for accuracy of fit. When installing devices into multi frames, always assemble the temperature controllers at the lowermost position.

"50 x 50 controller": The housing covers of the 50 x 50 controllers are 50 x 50 mm in size. Using a 50 x 50-mm insert frame, they can be integrated into nearly all light switch ranges in accordance with DIN 49075. The 50 x 50-mm insert frames must be ordered from the light switch manufacturer or from a wholesaler. The order number of the insert frame corresponding to the switch range in question can be found in the column "Only for adaptation with "50 x 50" cover set".

"55 x 55 controller": The housing covers of the 55 x 55 controllers are 55 x 55 mm in size. Many light switch ranges have inner dimensions of 55 x 55 mm. Therefore, the 55 x 55 controllers can be installed directly in the light switch frame without the use of an insert frame. See the column "Adaptation with "55 x 55" cover set" to determine whether the 55 x 55 controller fits in the given light switch range (✓).

All information regarding switch manufacturers' product lines and item numbers was last updated in 12/2019 | No liability is assumed for the information provided. | Technical specifications subject to change.

An adaptation list for RAL 1013 switch ranges is available from our website at www.alre.de and all information on integration is available in the product finder.

Product finder for alre cover sets for switch ranges from BERKER

Integration examples




RTBSU - in S.1



RTBSU - in B.3



RTBSU - in B.7



RTBSU - in K.1



RTBSU - in Arsys

Type alre	Berker range	Colour (RAL) / surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50x50*
<p>Standard (without switch)</p>	RTBSU-401.000#00	S.1/B.3/B.7	polar white (RAL 9010) glossy	JZ-001.100 (55 x 55, glossy)	UN990050	I not required
	RTBSU-401.002#00	S.1/B.3/B.7	polar white (RAL 9010) <u> matt </u>	JZ-001.101 (55 x 55, matt)	UN990055	I not required
	RTBSU-401.010#00	Arsys	polar white (RAL 9010) glossy	JZ-001.000 (50 x 50, glossy)	UN990035	I 1108 01 69
	RTBSU-401.086#00	Q.1/Q.3	polar white (RAL 9010) velvet	JZ-001.001 (50 x 50, matt)	UN990040	I 1109 60 79
	RTBSU-401.202#00	K.1	polar white (RAL 9010) glossy	JZ-001.000 (50 x 50, glossy)	UN990035	I 1108 71 09
		S.1	white (RAL 1013) glossy	JZ-001.110 (55 x 55, glossy)	UN990060	I not required
		Arsys	white (RAL 1013) glossy	JZ-001.010 (50 x 50, glossy)	UN990045	I 1108 01 02
		S.1/B.3/B.7	aluminium/matt	JZ-001.131 / BE (55x55)	UN990114	I not required
		S.1/B.3/B.7	anthracite/matt	JZ-001.141 / BE (55x55)	UN990115	I not required

Type alre	Berker range	Colour (RAL) / surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50x50*
<p>(LED)</p>	RTBSU-401.034#00	S.1/B.3/B.7	polar white (RAL 9010) glossy	JZ-016.100 (55x55 glossy)	UN990140	I not required
		Arsys	polar white (RAL 9010) glossy	JZ-016.000 (50x50 glossy)	UN990139	I 1108 01 69
		K.1	polar white (RAL 9010) glossy	JZ-016.000 (50x50 glossy)	UN990139	I 1108 71 09

Type alre	Berker range	Colour (RAL) / surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50x50*
<p>(ON/OFF switch, LED)</p>	RTBSU-401.062#00	S.1/B.3/B.7	polar white (RAL 9010) glossy	JZ-002.100 (55 x 55, glossy)	UN990051	I not required
	RTBSU-401.262#00	S.1/B.3/B.7	polar white (RAL 9010) <u> matt </u>	JZ-002.101 (55 x 55, matt)	UN990056	I not required
		Arsys	polar white (RAL 9010) glossy	JZ-002.000 (50 x 50, glossy)	UN990036	I 1108 01 69
		Q.1/Q.3	polar white (RAL 9010) velvet	JZ-002.001 (50 x 50, matt)	UN990041	I 1109 60 79
		K.1	polar white (RAL 9010) glossy	JZ-002.000 (50 x 50, glossy)	UN990036	I 1108 71 09
		S.1	white (RAL 1013) glossy	JZ-002.110 (55 x 55, glossy)	UN990061	I not required
		Arsys	white (RAL 1013) glossy	JZ-002.010 (50 x 50, glossy)	UN990046	I 1108 01 02

Type alre	Berker range	Colour (RAL) / surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50x50*
<p>(Switch H/OFF/C)</p>	RTBSU-401.063#00	S.1/B.3/B.7	polar white (RAL 9010) glossy	JZ-012.100 (55x55 glossy)	UN990123	I not required
		S.1/B.3/B.7	polar white (RAL 9010) <u> matt </u>	JZ-012.101 (55x55 matt)	UN990136	I not required
		Arsys	polar white (RAL 9010) glossy	JZ-012.000 (50x50 glossy)	UN990107	I 1108 01 69
		Q.1/Q.3	polar white (RAL 9010) velvet	JZ-012.001 (50x50 matt)	UN990132	I 1109 60 79
		K.1	polar white (RAL 9010) glossy	JZ-012.000 (50x50 glossy)	UN990107	I 1108 71 09
		S.1	white (RAL 1013) glossy	JZ-012.110 (55x55 glossy)	UN990137	I not required
		Arsys	white (RAL 1013) glossy	JZ-012.010 (50x50 glossy)	UN990133	I 1108 01 02

Type alre	Berker range	Colour (RAL) / surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50x50*
<p>(H/C switch)</p>	RTBSU-401.065#00	S.1/B.3/B.7	polar white (RAL 9010) glossy	JZ-004.100 (55 x 55, glossy)	UN990052	I not required
	RTBSU-401.265#00	S.1/B.3/B.7	polar white (RAL 9010) <u> matt </u>	JZ-004.101 (55 x 55, matt)	UN990057	I not required
		Arsys	polar white (RAL 9010) glossy	JZ-004.000 (50 x 50, glossy)	UN990037	I 1108 01 69
		Q.1/Q.3	polar white (RAL 9010) velvet	JZ-004.001 (50 x 50, matt)	UN990042	I 1109 60 79
		K.1	polar white (RAL 9010) glossy	JZ-004.000 (50 x 50, glossy)	UN990037	I 1108 71 09
		S.1	white (RAL 1013) glossy	JZ-004.110 (55 x 55, glossy)	UN990062	I not required
		Arsys	white (RAL 1013) glossy	JZ-004.010 (50x50, glossy)	UN990047	I 1108 01 02

Type alre	Berker range	Colour (RAL) / surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50x50*
<p>(3-way switch, LED)</p>	RTBSU-401.075#00	S.1/B.3/B.7	polar white (RAL 9010) glossy	JZ-003.100 (55 x 55, glossy)	UN990053	I not required
		S.1/B.3/B.7	polar white (RAL 9010) <u> matt </u>	JZ-003.101 (55 x 55, matt)	UN990058	I not required
		Arsys	polar white (RAL 9010) glossy	JZ-003.000 (50 x 50, glossy)	UN990038	I 1108 01 69
		Q.1/Q.3	polar white (RAL 9010) velvet	JZ-003.001 (50 x 50, matt)	UN990043	I 1109 60 79
		K.1	polar white (RAL 9010) glossy	JZ-003.000 (50 x 50, glossy)	UN990038	I 1108 71 09
		S.1	white (RAL 1013) glossy	JZ-003.110 (55 x 55, glossy)	UN990063	I not required
		Arsys	white (RAL 1013) glossy	JZ-003.010 (50 x 50, glossy)	UN990048	I 1108 01 02

*) must be ordered from switch manufacturer or electronics wholesaler

Product finder for alre cover sets for switch ranges from BUSCH-JAEGER

Integration examples





Type alre	Busch-Jaeger range	Colour (RAL) / surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50x50*	
RTBSU-401.000#00 RTBSU-401.002#00 RTBSU-401.010#00 RTBSU-401.086#00 RTBSU-401.202#00 RTBSU-401.210#00 Standard (without switch)	Reflex SI / SI Linear NEW	alpine white (RAL 9010) glossy	JZ-001.200 / BJ	G9990490	I	not required	
	Busch-balance SI	alpine white (RAL 9010) glossy	JZ-001.100 (55 x 55, glossy)	UN990050	I	not required	
	impuls	alpine white (RAL 9010) glossy	JZ-001.000 (50 x 50, glossy)	UN990035	I	1746/10-74	
	future linear / solo / axcent / carat NEW	studio white (RAL 9016) glossy	JZ-001.320 / BJ	G9990493	I	not required	
	future linear	studio white (RAL 9016) <u> matt </u>	JZ-001.021 (50 x 50, matt)	UN990100	I	1746/10-884	
	alpha nea	studio white (RAL 9016) glossy	JZ-001.020 (50 x 50, glossy)	UN990071	I	1746/10-24G	
	alpha nea	studio white (RAL 9016) <u> matt </u>	JZ-001.021 (50 x 50, matt)	UN990100	I	1746/10-24	
	Duro 2000 SI / SI Linear NEW	white (RAL 1013) glossy	JZ-001.210 / BJ	G9990491	I	not required	
	future linear / solo / carat	ivory white (RAL 1013) glossy	JZ-001.010 (50 x 50, glossy)	UN990045	I	1746/10-82	
	alpha nea	ivory white (RAL 1013) glossy	JZ-001.010 (50 x 50, glossy)	UN990045	I	1746/10-22G	
	impuls	ivory white (RAL 1013) glossy	JZ-001.010 (50 x 50, glossy)	UN990045	I	1746/10-72	
	future linear	aluminium silver / glossy	JZ-001.030 / BJ (50x50)	UN990108	I	1746/10-83	
	future linear	anthracite / glossy	JZ-001.040 / BJ (50x50)	UN990109	I	1746/10-81	
	RTBSU-401.034#00 (LED)	Busch-balance SI	alpine white (RAL 9010) glossy	JZ-016.100 (55x55 glossy)	UN990140	I	not required
		impuls	alpine white (RAL 9010) glossy	JZ-016.000 (50x50 glossy)	UN990139	I	1746/10-74
RTBSU-401.062#00 RTBSU-401.262#00 (ON/OFF switch, LED)	Reflex SI / SI Linear NEW	alpine white (RAL 9010) glossy	JZ-002.200 / BJ	G9990492	I	not required	
	Busch-balance SI	alpine white (RAL 9010) glossy	JZ-002.100 (55 x 55, glossy)	UN990051	I	not required	
	impuls	alpine white (RAL 9010) glossy	JZ-002.000 (50 x 50, glossy)	UN990036	I	1746/10-74	
	future linear/solo/axcent/carat	studio white (RAL 9016) glossy	JZ-002.020 (50 x 50, glossy)	UN990072	I	1746/10-84	
	future linear	studio white (RAL 9016) <u> matt </u>	JZ-002.021 (50 x 50, matt)	UN990101	I	1746/10-884	
	alpha nea	studio white (RAL 9016) glossy	JZ-002.020 (50 x 50, glossy)	UN990072	I	1746/10-24G	
	alpha nea	studio white (RAL 9016) <u> matt </u>	JZ-002.021 (50 x 50, matt)	UN990101	I	1746/10-24	
	Duro 2000 SI / SI Linear	white (RAL 1013) glossy	JZ-002.010 (50 x 50, glossy)	UN990046	I	1746-212-101	
	future linear / solo / carat	ivory white (RAL 1013) glossy	JZ-002.010 (50 x 50, glossy)	UN990046	I	1746/10-82	
	alpha nea	ivory white (RAL 1013) glossy	JZ-002.010 (50 x 50, glossy)	UN990046	I	1746/10-22G	
	impuls	ivory white (RAL 1013) glossy	JZ-002.010 (50 x 50, glossy)	UN990046	I	1746/10-72	
	RTBSU-401.063#00 (Switch H/OFF/C)	Reflex SI / SI Linear	alpine white (RAL 9010) glossy	JZ-012.000 (50x50 glossy)	UN990107	I	1746-214-101
		Busch-balance SI	alpine white (RAL 9010) glossy	JZ-012.100 (55x55 glossy)	UN990123	I	not required
		impuls	alpine white (RAL 9010) glossy	JZ-012.000 (50x50 glossy)	UN990107	I	1746/10-74
		future linear / solo / axcent / carat	studio white (RAL 9016) glossy	JZ-012.020 (50x50 glossy)	UN990134	I	1746/10-84
future linear		studio white (RAL 9016) <u> matt </u>	JZ-012.021 (50x50 matt)	UN990135	I	1746/10-884	
alpha nea		studio white (RAL 9016) glossy	JZ-012.020 (50x50 glossy)	UN990134	I	1746/10-24G	
alpha nea		studio white (RAL 9016) <u> matt </u>	JZ-012.021 (50x50 matt)	UN990135	I	1746/10-24	
Duro 2000 SI / SI Linear		white (RAL 1013) glossy	JZ-012.010 (50x50 glossy)	UN990133	I	1746-212-101	
future linear/solo/carat		ivory white (RAL 1013) glossy	JZ-012.010 (50x50 glossy)	UN990133	I	1746/10-82	
alpha nea		ivory white (RAL 1013) glossy	JZ-012.010 (50x50 glossy)	UN990133	I	1746/10-22G	
impuls		ivory white (RAL 1013) glossy	JZ-012.010 (50x50 glossy)	UN990133	I	1746/10-72	

Product finder for alre cover sets for switch ranges from BUSCH-JAEGER

Integration examples



Type alre	Busch-Jaeger range	Colour (RAL) / surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50 x 50 *	
 (H/C switch)	Reflex SI/SI Linear	alpine white (RAL 9010) glossy	JZ-004.000 (50 x 50, glossy)	UN990037	I	1746-214-101	
	Busch-balance SI	alpine white (RAL 9010) glossy	JZ-004.100 (55 x 55, glossy)	UN990052	I	not required	
	impuls	alpine white (RAL 9010) glossy	JZ-004.000 (50 x 50, glossy)	UN990037	I	1746/10-74	
	future linear / solo / axcent / carat	studio white (RAL 9016) glossy	JZ-004.020 (50 x 50, glossy)	UN990073	I	1746/10-84	
	future linear	studio white (RAL 9016) <u>mat</u>	JZ-004.021 (50 x 50, matt)	UN990103	I	1746/10-884	
	alpha nea	studio white (RAL 9016) glossy	JZ-004.020 (50 x 50, glossy)	UN990073	I	1746/10-24G	
	alpha nea	studio white (RAL 9016) <u>mat</u>	JZ-004.021 (50 x 50, matt)	UN990103	I	1746/10-24	
	Duro 2000 SI/SI Linear	white (RAL 1013) glossy	JZ-004.010 (50x50, glossy)	UN990047	I	1746-212-101	
	future linear / solo / carat	ivory white (RAL 1013) glossy	JZ-004.010 (50x50, glossy)	UN990047	I	1746/10-82	
	alpha nea	ivory white (RAL 1013) glossy	JZ-004.010 (50x50, glossy)	UN990047	I	1746/10-22G	
	impuls	ivory white (RAL 1013) glossy	JZ-004.010 (50x50, glossy)	UN990047	I	1746/10-72	
	 (3-way switch, LED)	Reflex SI/SI Linear	alpine white (RAL 9010) glossy	JZ-003.000 (50 x 50, glossy)	UN990038	I	1746-214-101
		Busch-balance SI	alpine white (RAL 9010) glossy	JZ-003.100 (55 x 55, glossy)	UN990053	I	not required
impuls		alpine white (RAL 9010) glossy	JZ-003.000 (50 x 50, glossy)	UN990038	I	1746/10-74	
future linear/solo/axcent/carat		studio white (RAL 9016) glossy	JZ-003.020 (50 x 50, glossy)	UN990074	I	1746/10-84	
future linear		studio white (RAL 9016) <u>mat</u>	JZ-003.021 (50 x 50, matt)	UN990102	I	1746/10-884	
alpha nea		studio white (RAL 9016) glossy	JZ-003.020 (50 x 50, glossy)	UN990074	I	1746/10-24G	
alpha nea		studio white (RAL 9016) <u>mat</u>	JZ-003.021 (50 x 50, matt)	UN990102	I	1746/10-24	
Duro 2000 SI/SI Linear		white (RAL 1013) glossy	JZ-003.010 (50 x 50, glossy)	UN990048	I	1746-212-101	
future linear / solo / carat		ivory white (RAL 1013) glossy	JZ-003.010 (50 x 50, glossy)	UN990048	I	1746/10-82	
alpha nea		ivory white (RAL 1013) glossy	JZ-003.010 (50 x 50, glossy)	UN990048	I	1746/10-22G	
impuls		ivory white (RAL 1013) glossy	JZ-003.010 (50 x 50, glossy)	UN990048	I	1746/10-72	

*) must be ordered from switch manufacturer or electronics wholesaler

For BJ future/solo there are also 55 x 55 insert frames (for use with alre 55 x 55 cover set) – BJ item no. 1747-84 (studio white) and 1784-82 (ivory white)

Note: Busch-Jaeger central disc cannot be used with alre RTBSU.

Product finder for alre cover sets for switch ranges from ELSO

Integration examples



RTBSU – in Joy



RTBSU – in Fashion



RTBSU – in Riva



RTBSU – in Scala

Type alre	Elso range	Colour (RAL)/surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50x50*
RTBSU-401.000#00	Joy	pure white (RAL 9010) glossy	JZ-001.100 (55 x 55, glossy)	UN990050	I	not required
RTBSU-401.002#00	Joy	pearl white (RAL 1013) glossy	JZ-001.110 (55 x 55, glossy)	UN990060	I	not required
RTBSU-401.010#00	Fashion/Riva/Scala	pure white (RAL 9010) glossy	JZ-001.000 (50 x 50, glossy)	UN990035	I	203084
RTBSU-401.086#00		pearl white (RAL 1013) glossy	JZ-001.010 (50 x 50, glossy)	UN990045	I	203080
RTBSU-401.202#00	Fashion/Riva/Scala	pure white (RAL 9010) glossy	JZ-001.000 (50 x 50, glossy)	UN990035	I	203084
RTBSU-401.210#00	Fashion/Riva/Scala	pearl white (RAL 1013) glossy	JZ-001.010 (50 x 50, glossy)	UN990045	I	203080



Standard (without switch)

Type alre	Elso range	Colour (RAL)/surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50x50*
RTBSU-401.034#00	Joy	pure white (RAL 9010) glossy	JZ-016.100 (55x55 glossy)	UN990140	I	not required
	Fashion/Riva/Scala	pure white (RAL 9010) glossy	JZ-016.000 (50x50 glossy)	UN990139	I	203084



(LED)

Type alre	Elso range	Colour (RAL)/surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50x50*
RTBSU-401.062#00	Joy	pure white (RAL 9010) glossy	JZ-002.100 (55 x 55, glossy)	UN990051	I	not required
RTBSU-401.262#00	Joy	pearl white (RAL 1013) glossy	JZ-002.110 (55 x 55, glossy)	UN990061	I	not required
	Fashion/Riva/Scala	pure white (RAL 9010) glossy	JZ-002.000 (50 x 50, glossy)	UN990036	I	203084
	Fashion/Riva/Scala	pearl white (RAL 1013) glossy	JZ-002.010 (50 x 50, glossy)	UN990046	I	203080



(ON/OFF switch, LED)

Type alre	Elso range	Colour (RAL)/surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50x50*
RTBSU-401.063#00	Joy	pure white (RAL 9010) glossy	JZ-012.100 (55x55 glossy)	UN990123	I	not required
	Joy	pearl white (RAL 1013) glossy	JZ-012.110 (55x55 glossy)	UN990137	I	not required
	Fashion/Riva/Scala	pure white (RAL 9010) glossy	JZ-012.000 (50x50 glossy)	UN990107	I	203084
	Fashion/Riva/Scala	pearl white (RAL 1013) glossy	JZ-012.010 (50x50 glossy)	UN990133	I	203080



(Switch H/OFF/C)

Type alre	Elso range	Colour (RAL)/surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50x50*
RTBSU-401.065#00	Joy	pure white (RAL 9010) glossy	JZ-004.100 (55 x 55, glossy)	UN990052	I	not required
RTBSU-401.265#00	Joy	pearl white (RAL 1013) glossy	JZ-004.110 (55 x 55, glossy)	UN990062	I	not required
	Fashion/Riva/Scala	pure white (RAL 9010) glossy	JZ-004.000 (50 x 50, glossy)	UN990037	I	203084
	Fashion/Riva/Scala	pearl white (RAL 1013) glossy	JZ-004.010 (50x50, glossy)	UN990047	I	203080



(H/C switch)

Type alre	Elso range	Colour (RAL)/surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50x50*
RTBSU-401.075#00	Joy	pure white (RAL 9010) glossy	JZ-003.100 (55 x 55, glossy)	UN990053	I	not required
	Joy	pearl white (RAL 1013) glossy	JZ-003.110 (55 x 55, glossy)	UN990063	I	not required
	Fashion/Riva/Scala	pure white (RAL 9010) glossy	JZ-003.000 (50 x 50, glossy)	UN990038	I	203084
	Fashion/Riva/Scala	pearl white (RAL 1013) glossy	JZ-003.010 (50 x 50, glossy)	UN990048	I	203080



(3-way switch, LED)

*) must be ordered from switch manufacturer or electronics wholesaler

Product finder for alre cover sets for switch ranges from GIRA

Integration examples



RTBSU – in Standard 55



RTBSU – in E2



RTBSU – in Event



RTBSU – in surface switch



RTBSU – in E22

Type alre	Gira range	Colour (RAL)/surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50 x 50 *
RTBSU-401.000#00	Standard 55/E2/E3/E22/Event/Esprit	pure white (RAL 9010) glossy	JZ-001.100 (55 x 55, glossy)	UN990050	I	not required
RTBSU-401.002#00	Standard 55/E2/E22/Event/Esprit	pure white (RAL 9010) matt	JZ-001.101 (55 x 55, matt)	UN990055	I	not required
RTBSU-401.010#00						
RTBSU-401.086#00						
RTBSU-401.202#00	Surface switch	pure white (RAL 9010) glossy	JZ-001.000 (50 x 50, glossy)	UN990035	I	0282 112
RTBSU-401.210#00						
	Standard 55/Event/Esprit/ClassiX	cream white (RAL 1013) glossy	JZ-001.110 (55 x 55, glossy)	UN990060	I	not required
	System 55	aluminium/matt	JZ-001.131/GI (55x55)	UN990110	I	not required
	System 55	anthracite/matt	JZ-001.141/GI (55x55)	UN990111	I	not required



Standard (without switch)

Type alre	Gira range	Colour (RAL)/surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50 x 50 *
RTBSU-401.034#00	Standard 55/E2/E3/E22/Event/Esprit	pure white (RAL 9010) glossy	JZ-016.100 (55x55 glossy)	UN990140	I	not required
	Surface switch	pure white (RAL 9010) glossy	JZ-016.000 (50x50 glossy)	UN990139	I	0282 112



(LED)

Type alre	Gira range	Colour (RAL)/surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50 x 50 *
RTBSU-401.062#00	Standard 55/E2/E3/E22/Event/Esprit	pure white (RAL 9010) glossy	JZ-002.100 (55 x 55, glossy)	UN990051	I	not required
RTBSU-401.262#00	Standard 55/E2/E22/Event/Esprit	pure white (RAL 9010) matt	JZ-002.101 (55 x 55, matt)	UN990056	I	not required
	Surface switch	pure white (RAL 9010) glossy	JZ-002.000 (50 x 50, glossy)	UN990036	I	0282 112
	Standard 55/Event/Esprit/ClassiX	cream white (RAL 1013) glossy	JZ-002.110 (55 x 55, glossy)	UN990061	I	not required



(ON/OFF switch, LED)

Type alre	Gira range	Colour (RAL)/surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50 x 50 *
RTBSU-401.063#00	Standard 55/E2/E3/E22/Event/Esprit	pure white (RAL 9010) glossy	JZ-012.100 (55x55 glossy)	UN990123	I	not required
	Standard 55/E2/E22/Event/Esprit	pure white (RAL 9010) matt	JZ-012.101 (55x55 matt)	UN990136	I	not required
	Surface switch	pure white (RAL 9010) glossy	JZ-012.000 (50x50 glossy)	UN990107	I	0282 112
	Standard 55/Event/Esprit/ClassiX	cream white (RAL 1013) glossy	JZ-012.110 (55x55 glossy)	UN990137	I	not required



(Switch H/OFF/C)

Type alre	Gira range	Colour (RAL)/surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50 x 50 *
RTBSU-401.065#00	Standard 55/E2/E3/E22/Event/Esprit	pure white (RAL 9010) glossy	JZ-004.100 (55 x 55, glossy)	UN990052	I	not required
RTBSU-401.265#00	Standard 55/E2/E22/Event/Esprit	pure white (RAL 9010) matt	JZ-004.101 (55 x 55, matt)	UN990057	I	not required
	Surface switch	pure white (RAL 9010) glossy	JZ-004.000 (50 x 50, glossy)	UN990037	I	0282 112
	Standard 55/Event/Esprit/ClassiX	cream white (RAL 1013) glossy	JZ-004.110 (55 x 55, glossy)	UN990062	I	not required



(H/C switch)

Type alre	Gira range	Colour (RAL)/surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50 x 50 *
RTBSU-401.075#00	Standard 55/E2/E3/E22/Event/Esprit	pure white (RAL 9010) glossy	JZ-003.100 (55 x 55, glossy)	UN990053	I	not required
	Standard 55/E2/E22/Event/Esprit	pure white (RAL 9010) matt	JZ-003.101 (55 x 55, matt)	UN990058	I	not required
	Surface switch	pure white (RAL 9010) glossy	JZ-003.000 (50 x 50, glossy)	UN990038	I	0282 112
	Standard 55/Event/Esprit/ClassiX	cream white (RAL 1013) glossy	JZ-003.110 (55 x 55, glossy)	UN990063	I	not required



(3-way switch, LED)

*) must be ordered from switch manufacturer or electronics wholesaler

**) for GIRA surface switches, there are also 55 x 55 insert frames (for the use of alre 55 x 55 cover set) – GIRA item no. 0289 112 (pure white) and 0289 111 (cream white)

Product finder for alre cover sets for switch ranges from JUNG

Integration examples



RTBSU – in AS 500



RTBSU – in A 500




RTBSU – in A plus





RTBSU – in A creation





RTBSU – in LS-design


Type alre	Jung range	Colour (RAL)/surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50x50*
RTBSU-401.000#00 RTBSU-401.002#00 RTBSU-401.010#00 RTBSU-401.086#00 RTBSU-401.202#00 RTBSU-401.210#00  Standard (without switch)	AS 500 / A 500 / A550 / A creation / A plus / A flow	alpine white (RAL 9010) glossy	JZ-001.100 (55 x 55, glossy)	UN990050	I	not required
	CD 500 / CD plus	alpine white (RAL 9010) glossy	JZ-001.000 (50 x 50, glossy)	UN990035	I	CD 590 Z WW
	LS 990 / LS design / LS plus	alpine white (RAL 9010) glossy	JZ-001.000 (50 x 50, glossy)	UN990035	I	LS 961 Z WW**
	AS 500	white (RAL 1013) glossy	JZ-001.110 (55 x 55, glossy)	UN990060	I	not required
	CD 500 / CD plus	white (RAL 1013) glossy	JZ-001.010 (50 x 50, glossy)	UN990045	I	590 Z
	LS 990 / LS design / LS plus	white (RAL 1013) glossy	JZ-001.010 (50 x 50, glossy)	UN990045	I	LS 961 Z**
	Series A	aluminium/glossy	JZ-001.130 / JU (55x55)	UN990112	I	not required
	Series A	anthracite/matt	JZ-001.141 / JU (55x55)	UN990113	I	not required

Type alre	Jung range	Colour (RAL)/surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50x50*
RTBSU-401.034#00  (LED)	AS 500 / A 500 / A550 / A creation / A plus / A flow	alpine white (RAL 9010) glossy	JZ-016.100 (55x55 glossy)	UN990140	I	not required
	CD 500 / CD plus	alpine white (RAL 9010) glossy	JZ-016.000 (50x50 glossy)	UN990139	I	CD 590 Z WW
	LS 990 / LS design / LS plus	alpine white (RAL 9010) glossy	JZ-016.000 (50x50 glossy)	UN990139	I	LS 961 Z WW**

Type alre	Jung range	Colour (RAL)/surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50x50*
RTBSU-401.062#00 RTBSU-401.262#00  (ON/OFF switch, LED)	AS 500 / A 500 / A550 / A creation / A plus / A flow	alpine white (RAL 9010) glossy	JZ-002.100 (55 x 55, glossy)	UN990051	I	not required
	CD 500 / CD plus	alpine white (RAL 9010) glossy	JZ-002.000 (50 x 50, glossy)	UN990036	I	CD 590 Z WW
	LS 990 / LS design / LS plus	alpine white (RAL 9010) glossy	JZ-002.000 (50 x 50, glossy)	UN990036	I	LS 961 Z WW**
	AS 500	white (RAL 1013) glossy	JZ-002.110 (55 x 55, glossy)	UN990061	I	not required
	CD 500 / CD plus	white (RAL 1013) glossy	JZ-002.010 (50 x 50, glossy)	UN990046	I	590 Z
	LS 990 / LS design / LS plus	white (RAL 1013) glossy	JZ-002.010 (50 x 50, glossy)	UN990046	I	LS 961 Z**

Type alre	Jung range	Colour (RAL)/surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50x50*
RTBSU-401.063#00  (Switch H/OFF/C)	AS 500 / A 500 / A550 / A creation / A plus / A flow	alpine white (RAL 9010) glossy	JZ-012.100 (55x55 glossy)	UN990123	I	not required
	CD 500 / CD plus	alpine white (RAL 9010) glossy	JZ-012.000 (50x50 glossy)	UN990107	I	CD 590 Z WW
	LS 990 / LS design / LS plus	alpine white (RAL 9010) glossy	JZ-012.000 (50x50 glossy)	UN990107	I	LS 961 Z WW**
	AS 500	white (RAL 1013) glossy	JZ-012.110 (55x55 glossy)	UN990137	I	not required
	CD 500 / CD plus	white (RAL 1013) glossy	JZ-012.010 (50x50 glossy)	UN990133	I	590 Z
	LS 990 / LS design / LS plus	white (RAL 1013) glossy	JZ-012.010 (50x50 glossy)	UN990133	I	LS 961 Z**

Type alre	Jung range	Colour (RAL)/surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50x50*
RTBSU-401.065#00 RTBSU-401.265#00  (H/C switch)	AS 500 / A 500 / A550 / A creation / A plus / A flow	alpine white (RAL 9010) glossy	JZ-004.100 (55 x 55, glossy)	UN990052	I	not required
	CD 500 / CD plus	alpine white (RAL 9010) glossy	JZ-004.000 (50 x 50, glossy)	UN990037	I	CD 590 Z WW
	LS 990 / LS design / LS plus	alpine white (RAL 9010) glossy	JZ-004.000 (50 x 50, glossy)	UN990037	I	LS 961 Z WW**
	AS 500	white (RAL 1013) glossy	JZ-004.110 (55 x 55, glossy)	UN990062	I	not required
	CD 500 / CD plus	white (RAL 1013) glossy	JZ-004.010 (50x50, glossy)	UN990047	I	590 Z
	LS 990 / LS design / LS plus	white (RAL 1013) glossy	JZ-004.010 (50x50, glossy)	UN990047	I	LS 961 Z**

Type alre	Jung range	Colour (RAL)/surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50x50*
RTBSU-401.075#00  (3-way switch, LED)	AS 500 / A 500 / A550 / A creation / A plus / A flow	alpine white (RAL 9010) glossy	JZ-003.100 (55 x 55, glossy)	UN990053	I	not required
	CD 500 / CD plus	alpine white (RAL 9010) glossy	JZ-003.000 (50 x 50, glossy)	UN990038	I	CD 590 Z WW
	LS 990 / LS design / LS plus	alpine white (RAL 9010) glossy	JZ-003.000 (50 x 50, glossy)	UN990038	I	LS 961 Z WW**
	AS 500	white (RAL 1013) glossy	JZ-003.110 (55 x 55, glossy)	UN990063	I	not required
	CD 500 / CD plus	white (RAL 1013) glossy	JZ-003.010 (50 x 50, glossy)	UN990048	I	590 Z
	LS 990 / LS design / LS plus	white (RAL 1013) glossy	JZ-003.010 (50 x 50, glossy)	UN990048	I	LS 961 Z**

*) must be ordered from switch manufacturer or electronics wholesaler

**) for the Jung LS series, there are also 55 x 55 insert frames (for the use of alre 55 x 55 cover set) – JUNG item no. LS 961 Z5 WW (alpine white) and LS 961 Z5 (white)

Product finder for alre cover sets for switch ranges from MERTEN

Integration examples



RTBSU - in 1-M



RTBSU - in M-Smart



RTBSU - in M-Plan



RTBSU - in Artec



RTBSU - in Antik

Type alre	Merten range	Colour (RAL)/surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50 x 50 *
RTBSU-401.000#00	1-M, Atelier-M/M-Smart, M-Pure, M-Plan, M-Creativ	polar white (RAL 9010) glossy	JZ-001.100 (55 x 55, glossy)	UN990050	I	not required
RTBSU-401.002#00	1-M, Atelier-M/M-Smart, M-Pure, M-Plan, M-Creativ	polar white (RAL 9010) matt	JZ-001.101 (55 x 55, matt)	UN990055	I	not required
RTBSU-401.010#00	1-M, Atelier-M/M-Smart, M-Pure, M-Plan, M-Creativ	active white (RAL 9016) glossy	JZ-001.120 (55 x 55, glossy)	UN990086	I	not required
RTBSU-401.086#00	D-Life	lotus white (RAL 9016) glossy	JZ-001.020 (50 x 50, glossy)	UN990071	I	MEG4500-6035
RTBSU-401.202#00	System Design: Artec, Antik	polar white (RAL 9010) glossy	JZ-001.000 (50 x 50, glossy)	UN990035	I	5160 99
<p>Standard (without switch)</p>	1-M, Atelier-M/M-Smart, M-Pure, M-Plan, M-Creativ	white (RAL 1013) glossy	JZ-001.110 (55 x 55, glossy)	UN990060	I	not required
	System Design: Artec, Antik	white (RAL 1013) glossy	JZ-001.010 (50 x 50, glossy)	UN990045	I	5160 94
	System M	aluminium/matt	JZ-001.131/ME (55x55)	UN990116	I	not required
	System M	anthracite/matt	JZ-001.141/ME (55x55)	UN990117	I	not required

Type alre	Merten range	Colour (RAL)/surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50 x 50 *
RTBSU-401.034#00	1-M, Atelier-M/M-Smart, M-Pure, M-Plan, M-Creativ	polar white (RAL 9010) glossy	JZ-016.100 (55x55 glossy)	UN990140	I	not required
<p>(LED)</p>	System Design: Artec, Antik	polar white (RAL 9010) glossy	JZ-016.000 (50x50 glossy)	UN990139	I	5160 99

Type alre	Merten range	Colour (RAL)/surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50 x 50 *
RTBSU-401.062#00	1-M, Atelier-M/M-Smart, M-Pure, M-Plan, M-Creativ	polar white (RAL 9010) glossy	JZ-002.100 (55 x 55, glossy)	UN990051	I	not required
RTBSU-401.262#00	1-M, Atelier-M/M-Smart, M-Pure, M-Plan, M-Creativ	polar white (RAL 9010) matt	JZ-002.101 (55 x 55, matt)	UN990056	I	not required
<p>(ON/OFF switch, LED)</p>	1-M, Atelier-M/M-Smart, M-Pure, M-Plan, M-Creativ	active white (RAL 9016) glossy	JZ-002.120 (55 x 55, glossy)	UN990088	I	not required
	D-Life	lotus white (RAL 9016) glossy	JZ-002.020 (50 x 50, glossy)	UN990072	I	MEG4500-6035
	System Design: Artec, Antik	polar white (RAL 9010) glossy	JZ-002.000 (50 x 50, glossy)	UN990036	I	5160 99
	1-M, Atelier-M/M-Smart, M-Pure, M-Plan, M-Creativ	white (RAL 1013) glossy	JZ-002.110 (55 x 55, glossy)	UN990061	I	not required
	System Design: Artec, Antik	white (RAL 1013) glossy	JZ-002.010 (50 x 50, glossy)	UN990046	I	5160 94

Type alre	Merten range	Colour (RAL)/surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50 x 50 *
RTBSU-401.063#00	1-M, Atelier-M/M-Smart, M-Pure, M-Plan, M-Creativ	polar white (RAL 9010) glossy	JZ-012.100 (55x55 glossy)	UN990123	I	not required
<p>(Switch H/OFF/C)</p>	1-M, Atelier-M/M-Smart, M-Pure, M-Plan, M-Creativ	polar white (RAL 9010) matt	JZ-012.101 (55x55 matt)	UN990136	I	not required
	1-M, Atelier-M/M-Smart, M-Pure, M-Plan, M-Creativ	active white (RAL 9016) glossy	JZ-012.120 (55x55 glossy)	UN990138	I	not required
	D-Life	lotus white (RAL 9016) glossy	JZ-012.020 (50x50 glossy)	UN990134	I	MEG4500-6035
	System Design: Artec, Antik	polar white (RAL 9010) glossy	JZ-012.000 (50x50 glossy)	UN990107	I	5160 99
	1-M, Atelier-M/M-Smart, M-Pure, M-Plan, M-Creativ	white (RAL 1013) glossy	JZ-012.110 (55x55 glossy)	UN990137	I	not required
	System Design: Artec, Antik	white (RAL 1013) glossy	JZ-012.010 (50x50 glossy)	UN990133	I	5160 94

Type alre	Merten range	Colour (RAL)/surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50 x 50 *
RTBSU-401.065#00	1-M, Atelier-M/M-Smart, M-Pure, M-Plan, M-Creativ	polar white (RAL 9010) glossy	JZ-004.100 (55 x 55, glossy)	UN990052	I	not required
RTBSU-401.265#00	1-M, Atelier-M/M-Smart, M-Pure, M-Plan, M-Creativ	polar white (RAL 9010) matt	JZ-004.101 (55 x 55, matt)	UN990057	I	not required
<p>(H/C switch)</p>	1-M, Atelier-M/M-Smart, M-Pure, M-Plan, M-Creativ	active white (RAL 9016) glossy	JZ-004.120 (55 x 55, glossy)	UN990089	I	not required
	D-Life	lotus white (RAL 9016) glossy	JZ-004.020 (50 x 50, glossy)	UN990073	I	MEG4500-6035
	System Design: Artec, Antik	polar white (RAL 9010) glossy	JZ-004.000 (50 x 50, glossy)	UN990037	I	5160 99
	1-M, Atelier-M/M-Smart, M-Pure, M-Plan, M-Creativ	white (RAL 1013) glossy	JZ-004.110 (55 x 55, glossy)	UN990062	I	not required
	System Design: Artec, Antik	white (RAL 1013) glossy	JZ-004.010 (50x50, glossy)	UN990047	I	5160 94

Type alre	Merten range	Colour (RAL)/surface finish	alre cover set	Cover set Item no.	PG	Insert frame 50 x 50 *
RTBSU-401.075#00	1-M, Atelier-M/M-Smart, M-Pure, M-Plan, M-Creativ	polar white (RAL 9010) glossy	JZ-003.100 (55 x 55, glossy)	UN990053	I	not required
<p>(3-way switch, LED)</p>	1-M, Atelier-M/M-Smart, M-Pure, M-Plan, M-Creativ	polar white (RAL 9010) matt	JZ-003.101 (55 x 55, matt)	UN990058	I	not required
	1-M, Atelier-M/M-Smart, M-Pure, M-Plan, M-Creativ	active white (RAL 9016) glossy	JZ-003.120 (55 x 55, glossy)	UN990090	I	not required
	D-Life	lotus white (RAL 9016) glossy	JZ-003.020 (50 x 50, glossy)	UN990074	I	MEG4500-6035
	System Design: Artec, Antik	polar white (RAL 9010) glossy	JZ-003.000 (50 x 50, glossy)	UN990038	I	5160 99
	1-M, Atelier-M/M-Smart, M-Pure, M-Plan, M-Creativ	white (RAL 1013) glossy	JZ-003.110 (55 x 55, glossy)	UN990063	I	not required
	System Design: Artec, Antik	white (RAL 1013) glossy	JZ-003.010 (50 x 50, glossy)	UN990048	I	5160 94

*) must be ordered from switch manufacturer or electronics wholesaler
 Note: Merten central plates cannot be used with alre RTBSU.

Electronic room or floor temperature controller with clock HTRRUu

Flush-mounted installation – Design Berlin UP



Technical data

Design:	Berlin UP (flush-mounted)
Housing material:	PC, PMMA, ABS plastic
Operating voltage:	230 VAC, 50 Hz
Storage temperature:	-20 ... +70 °C
Permissible atmospheric humidity:	Max. 95% rel. humidity, non-condensing
Electrical connection:	pluggable screw terminals
Mounting/attachment:	in flush-mounted socket, can be adapted to fit virtually any switch range (deep flush-mounted socket recommended) see adaptation list on page 97
Protection rating:	IP 30
Protection class:	II, if properly mounted
Safety and EMC:	according to DIN EN 60730
Max. switching current:	10 (2) A
Max. switching voltage:	230 VAC, 50 Hz
Min. switching voltage:	230 VAC, 50 Hz
Switching power:	2300 W
Switching element:	relay
Switching contact:	NO contact
Output signal:	230 VAC, 50 Hz
Sensor:	NTC internal, optional external floor sensor see accessories, optional external room sensor see Sensors "Sensor 2"
Sensor rupture and short-circuit protection:	If the internal or external sensor is faulty or the external sensor is not connected to the functions room temperature controller with floor monitoring, floor temperature controller or room temperature controller with ext. sensor, emergency operation is triggered.
Control function:	heating
Control range:	5 ... 30 °C (room) / 10 ... 42 °C (floor)
Setting range:	The setting range varies, depending on the use of the controller as a room temperature controller (5 ... 30 °C) or floor temperature controller (10 ... 42 °C)
Hysteresis:	for room control < 1 K, for floor control < 2 K
Display type:	illuminated graphical display
Display:	setpoint, actual temperature/date, time; setpoint, actual temperature or date, time
Accessories:	terminal strips: VOOPL suitable valve actuators: ZBOOA-010.100

Application

Flush-mounted controller for time-dependent single room or floor temperature control for electrical and hot water heating systems (normally closed actuators). The device can be used as a room temperature controller with internal sensor or (in combination with an optional remote sensor) as a room temperature controller with floor monitoring or floor temperature controller. (Remote sensor is not a part of the scope of delivery)


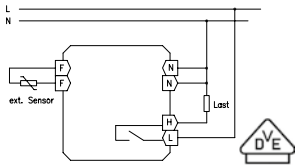


This clock thermostat has a weekly timer with individually adjustable programs (factory setting: "normal" daily sequences).

Self-learning function: Automatic adjustment of the controller to the start of the heating period. The goal is to achieve the comfort temperature at the time that has been set. The learning function is disabled upon delivery, but it can be enabled.

Standby function: This function disables the control; frost protection is still ensured.













General features:
ECO function, adjustable ECO value; "ECO" display; "on/off" display; "heating" display; digital actual value display; backlighting; standby mode with frost protection monitoring; child-safe features; load setting; power reserve (approx. 5 days); actual value correction/measured value correction; learning function; valve protection; holiday setting; party setting; external setting; comfortable operation using touch-sensitive buttons; VDE-tested

Special colours are available for projects on request.

Type/image	Item no.	Features	Circuit diagram	PG
	UA060000	Scope of delivery: controller, cover 50 x 50 mm pure white (like RAL 9010), glossy, alre frame "Berlin"		I
	UN060011	like HTRRUu 210.021#21 but scope of delivery as follows: controller, cover 50 x 50 mm pure white (like RAL 9010), glossy, alre frame "Berlin" , external floor sensor (HF-8/4-K2)		I
	UA060001	like HTRRUu 210.021#21 but scope of delivery as follows: controller, cover 50 x 50 mm pure white (like RAL 9010), glossy, without frame		I

Electronic room or floor temperature controller with clock HTRRUu



Flush-mounted installation – Design Berlin UP

Type/image	Item no.	Features	Circuit diagram	PG
	UA060002	like HTRRUu 210.021#21 but scope of delivery as follows: controller, cover 50 x 50 mm pearl white (like RAL 1013), glossy , without frame		I
	UA060003	like HTRRUu 210.021#21 but scope of delivery as follows: Controller, cover 50 x 50 mm traffic/studio white (like RAL 9016), glossy , without frame		I
	UA060006	like HTRRUu 210.021#21 but scope of delivery as follows: controller, cover suitable for BUSCH JAEGER Reflex SI/SI Linear pure white (like RAL 9010), glossy , without frame		I
	UA060004	like HTRRUu 210.021#21 but scope of delivery as follows: controller, cover 55 x 55 mm pure white (like RAL 9010), glossy , without frame		I
	UA060020	like HTRRUu 210.021#21 but scope of delivery as follows: controller, cover 55 x 55 mm pure white (like RAL 9010), mat , without frame		I
	UA060005	like HTRRUu 210.021#21 but scope of delivery as follows: controller, cover 55 x 55 mm pearl white (like RAL 1013), glossy , without frame		I
	UA060014	like HTRRUu 210.021#21 but scope of delivery as follows: Controller, cover 55 x 55 mm traffic/studio white (like RAL 9016), glossy , without frame		I
Accessories	Item no.	Features		PG
	G8000370	General features: optional, external floor sensor Ambient temperature: -5 ... +70 °C Protection rating: IP65 Sensor: NTC Connecting cable: 4 m, PVC		II
	G8000368	General features: optional, external floor sensor Ambient temperature: -5 ... +70 °C Protection rating: IP65 Sensor: NTC Connecting cable: 6 m, PVC		II
	G9990180	General features: heat conduction paste 2 ml; R > 1 TΩ/cm, silicone-free Ambient temperature: -40 ... +150 °C Heat conductivity: > 0.7 W/mK		II
	C1809515	General features: protective sleeve for screed mounting (for sleeve sensor HF Ø 7.7, for example, HF-8/4-K2 or HF-8/6-K2), copper		II
	VV000025	General features: alre frame "Berlin" (neutral) for all flush-mounted controllers with cover 50 x 50 mm Design: Berlin Surface finish: Glossy Colour: Pure white, like RAL 9010 Material: PC plastic		I

Electronic room or floor temperature controller with clock HTRRUu




Flush-mounted installation – Design Berlin UP

Accessories	Item no.	Features	PG
JZ-090.910	VV000010	<p>General features: alre frame “Berlin” (neutral) for all flush-mounted controllers with cover 50 x 50 mm</p> <p>Design: Berlin</p> <p>Surface finish: Glossy</p> <p>Colour: Pearl white, like RAL 1013</p> <p>Material: PC plastic</p>	I

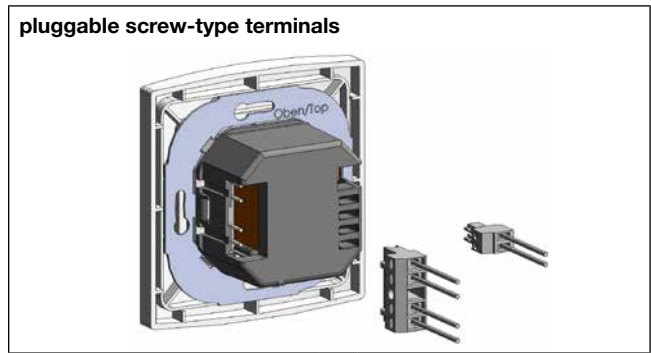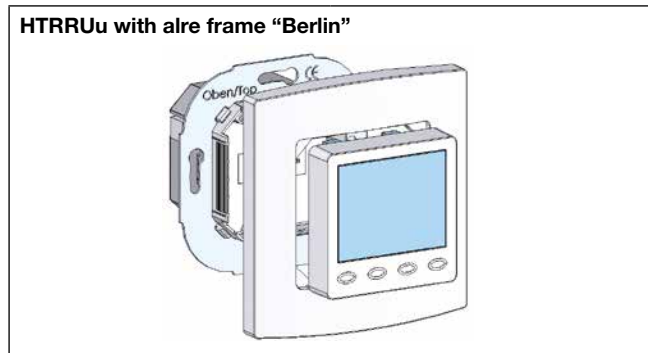

- Other benefits:**
- Pluggable screw-type terminals facilitate quick and easy assembly
 - Illuminated, graphics-capable display
 - Choice of 4 different external floor sensors (2 kOhm – alre, 12 kOhm – OJ/AEG, 15 kOhm – DEVI, 33 kOhm – Eberle), meaning they are also ideal for retrofitting
 - VDE mark
 - Automatic adjustment to standard/daylight savings time
 - Learning function
 - Correction of measurement values
 - Configurable display content during installation, choice of various languages including German, English, French, Dutch, Polish, Spanish, Czech, Russian
 - Limit setting for floor temperature
 - Standby with frost protection
 - Key lock
 - Valve protection function
 - Configurable control method (PI-PWM or 2-point control)
 - Holiday and party function
 - Power reserve
 - “Heating operation” display (orange LED)
 - Load setting for improved control

- Factory setting:**
- Holiday temperature 17 °C,
 - Setback temperature 17 °C,
 - Comfort temperature 20 °C,
 - Comfort times: Mon–Fri 5 am–9 am/4 pm–10 pm, Sat/Sun 6 am–10 pm
 - Key lock deactivated
 - Automatic adjustment to standard/daylight savings time enabled
 - Valve and pump protection disabled
 - Learning function disabled
 - Display lighting 10 s
 - Heating load 0.1 kW
 - 2-point control method
 - External sensor
 - 2 kOhm and max. floor temperature 42 °C (if configured as floor temperature controller)

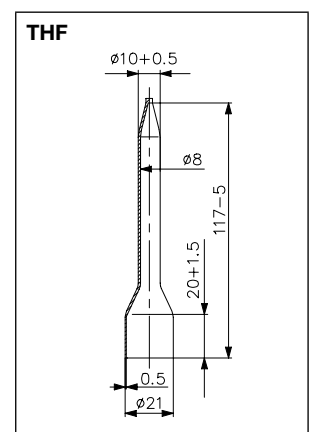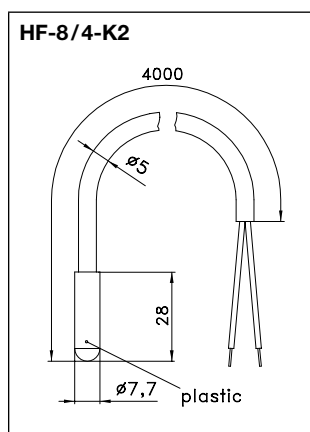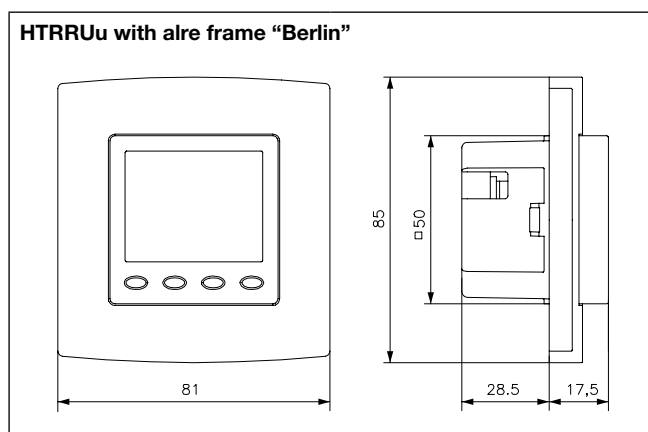

Examples of integration in switch ranges with or without insert frames



Adaptation of alre flush-mounted controllers HTRRUu 210.021

Manufacturer	Range	Colour RAL 9010 (surface finish)	Adaptation in switch range ("55 x 55") possible using ...	"50 x 50" adaptation possible with ... (insert frame from manufacturer required)
BERKER	S.1	polar white (matt)	HTRRUu 210.021#56	not required
BERKER	S.1	polar white (glossy)	HTRRUu 210.021#55	not required
BERKER	Arsys	polar white (glossy)		HTRRUu 210.021#07 + (1108 01 69)
BERKER	B.3	aluminium/polar white (matt)	HTRRUu 210.021#56	not required
BERKER	B.3	aluminium/polar white (glossy)	HTRRUu 210.021#55	not required
BERKER	B.7	glass/polar white (matt)	HTRRUu 210.021#56	not required
BERKER	B.7	glass/polar white (glossy)	HTRRUu 210.021#55	not required
BERKER	K.1	polar white (glossy)		HTRRUu 210.021#07 + (1108 71 09)
BUSCH-JAEGER	Reflex SI/SI Linear	alpine white (glossy)	HTRRUu 210.021#28	not required
BUSCH-JAEGER	Busch-balance SI	alpine white (glossy)	HTRRUu 210.021#55	not required
BUSCH-JAEGER	impuls	alpine white (glossy)		HTRRUu 210.021#07 + (1746/10-74)
BUSCH-JAEGER	solo/future/axcent etc.	studio white – see RAL 9016 below		
ELSO	Joy	pure white (glossy)	HTRRUu 210.021#55	not required
ELSO	Fashion/Riva/Scala	pure white (glossy)		HTRRUu 210.021#07 + 203084
GIRA	surface switch	pure white (glossy)		HTRRUu 210.021#07 + (0282 112)
GIRA (System 55)	Standard/E2	pure white (semi-gloss)	HTRRUu 210.021#56	not required
GIRA (System 55)	Standard/E2/E3	pure white (glossy)	HTRRUu 210.021#55	not required
GIRA (System 55)	E22	pure white (glossy)	HTRRUu 210.021#55	not required
GIRA (System 55)	Event	pure white (semi-gloss) + opaque...	HTRRUu 210.021#56	not required
GIRA (System 55)	Event	pure white (glossy) + opaque...	HTRRUu 210.021#55	not required
GIRA (System 55)	Esprit	pure white (semi-gloss) + glass, aluminium...	HTRRUu 210.021#56	not required
GIRA (System 55)	Esprit	pure white (glossy) + glass, aluminium...	HTRRUu 210.021#55	not required
GIRA	S-Color	pure white (high-gloss)		HTRRUu 210.021#07 + (0282 40)
JUNG	CD 500/CD plus	alpine white (glossy)		HTRRUu 210.021#07 + (CD 590 Z WW)
JUNG	A 500/AS 500/A plus	alpine white (glossy)	HTRRUu 210.021#55	not required
JUNG	LS 990	alpine white (glossy)		HTRRUu 210.021#07 + (LS 961 Z WW)
JUNG	LS plus	alpine white (glass)		HTRRUu 210.021#07 + (LS 961 Z WW)
JUNG	A creation	alpine white (glossy)	HTRRUu 210.021#55	not required
JUNG	LS Design	alpine white (glossy)		HTRRUu 210.021#07 + (LS 961 Z WW)
MERTEN (System M)	M-Smart, M-Plan, M-Pure	polar white (matt)	HTRRUu 210.021#56	not required
MERTEN (System M)	M-Smart, M-Plan, M-Creativ, M-Pure	polar white (glossy)	HTRRUu 210.021#55	not required
MERTEN (Basis System)	1-M/Atelier-M	polar white (glossy)	HTRRUu 210.021#55	not required
MERTEN (Surface System)	Artec/Antik	polar white (glossy)		HTRRUu 210.021#07 + (5160 99)
MERTEN	1-M/M-Smart/M-Plan/M-Pure/D-Life	active white – see RAL 9016 below		
PEHA	Standard	pure white (glossy)		HTRRUu 210.021#07 + (80.670.02 ZV)
PEHA	Dialog	pure white (glossy)		HTRRUu 210.021#07 + (95.670.02 ZV)
PEHA	Aura	pure white (matt)/glass		HTRRUu 210.021#07 + (20.670.02 ZV)
PEHA	Badora	pure white (glossy)		HTRRUu 210.021#07 + (11.670.02 ZV)

Manufacturer	Range	Colour RAL 9016 (surface finish)	Adaptation in switch range "55 x 55" possible using ...	"50 x 50" adaptation possible with ... (insert frame from manufacturer required)
BUSCH-JAEGER	solo/future/future linear	studio white (RAL 9016, glossy)		HTRRUu 210.021#27 + (1746/10-84)
BUSCH-JAEGER	axcent	studio white (RAL 9016, glossy)		HTRRUu 210.021#27 + (1746/10-84)
BUSCH-JAEGER	carat (glass, bronze, gold)	studio white (RAL 9016, glossy)		HTRRUu 210.021#27 + (1746/10-84)
BUSCH-JAEGER	alpha (nea/exclusive *)	studio white (RAL 9016, glossy)		HTRRUu 210.021#27 + (1746/10-24G)
MERTEN	M-Smart, M-Plan, M-Pure	active white (RAL 9016, glossy)	HTRRUu 210.021#59	not required
MERTEN	1-M/Atelier-M	active white (RAL 9016, glossy)	HTRRUu 210.021#59	not required
MERTEN	D-Life	lotus white (RAL 9016)		HTRRUu 210.021#27 + MEG4500-6035
PEHA	Standard	arctic		HTRRUu 210.021#27 + (D 80.670 ZV AW)

*) During assembly, you need to remove 4 plastic tabs located at the rear of the frame

NOTE: Most light switch ranges are designed in a colour like RAL 9010, although different switch manufacturers use different designations for this colour. Coloured, glass and aluminium frames are also combined with white jacks or plugs so that controllers with white covers can also be integrated into these frames. Check the precise application in each individual case. The frames have different surface qualities (matt/glossy). For design reasons, the cover of the controller should have the same quality as the frame. We accept no liability for slight variations in colour and surface finish or for accuracy of fit. When installing devices into multi frames, always assemble the temperature controllers at the lowermost position.

"50 x 50 controller": The housing covers of the 50 x 50 controllers are 50 x 50 mm in size. Using a 50 x 50-mm insert frame, they can be integrated into nearly all light switch ranges in accordance with DIN 49075. The 50 x 50-mm insert frames must be ordered from the light switch manufacturer or from a wholesaler. The order number of the insert frame corresponding to the switch range in question can be found in the column "For adaptation of size "50 x 50" HTRRUu".

"55 x 55 controller": The housing covers of the 55 x 55 controllers are 55 x 55 mm in size. Many light switch ranges have inner dimensions of 55 x 55 mm. Therefore, the 55 x 55 controllers can be installed directly in the light switch frame without the use of an insert frame. See the column "Adaptation in switch range (55 x 55)" to determine whether the 55 x 55 controller fits in the given light switch range (HTRRUu 210.021#xx).

All information regarding switch manufacturers' product lines and item numbers was last updated in 12/2019 | No liability is assumed for the information provided. | Technical specifications subject to change.

An adaptation list for RAL 1013 switch ranges is available from our website at www.alre.de.

Electronic floor or surface temperature controller with remote sensor (for floor heating/wall and ceiling heating/tiled stove) HTRRB

Surface-mounted installation – Design Berlin 2000



Technical data

Design:	Berlin 2000
Surface finish:	matt
Housing colour:	pure white, like RAL 9010
Housing material:	ABS plastic
Operating voltage:	230 VAC, 50 Hz
Ambient temperature:	0 ... 30 °C
Storage temperature:	-20 ... +70 °C
Permissible atmospheric humidity:	Max. 95% rel. humidity, non-condensing
Electrical connection:	screw-type terminals
Mounting/attachment:	Surface/wall mounting (4-hole assembly on flush-mounted socket)
Protection rating:	IP 30
Protection class:	II, if properly mounted
Safety and EMC:	according to DIN EN 60730
Max. switching current:	13 (2) A
Max. switching voltage:	230 VAC, 50 Hz
Min. switching voltage:	230 VAC, 50 Hz
Switching power:	3000 W
Switching element:	relay
Switching contact:	NO contact
Output signal:	230 VAC, 50 Hz
Sensor:	external, NTC
Sensor rupture and short-circuit protection:	heating is switched off
Control function:	heating
Hysteresis:	approx. 1 K
General features:	"Heating" display: mechanical range limitation; 3000 W switching power for electric direct heating systems, natural stone heating; "on/off" switch; external setting

Application

Temperature control (e.g., of electrical heating systems) for floor, fringe zone, bathroom, ceiling, tiled stove, marble and wall heating systems or tempering systems.






Note: The sensor line must be routed in a protective duct. Parallel routing together with lines that carry alternating currents is not admissible.




Floor temperature controller with clock: HTRRBu-110.021
 Floor temperature controller for distributor assembly: ITR 79 Series (plant engineering)

Type/image	Item no.	Features	Circuit diagram	PG
<p>HTRRB-011.010</p>	DA400000	<p>General features: Floor temperature controller with remote sensor HF-8/4-K2 4 m, multi-digit display 1 ... 6</p> <p>Control range: 10 ... 60 °C</p> <p>Note: The setting range can be adjusted to 10 ... 40 °C (for example) using the mechanical range limitation as a replacement for the type HTRRB-010.310.</p>		I
<p>HTRRB-011.410</p>	DA400100	<p>General features: Tiled stove surface temperature controller with remote sensor HF-5/4-K3 4 m; scale: Degrees Celsius; threshold arrow</p> <p>Control range: 20 ... 80 °C</p>		I

Electronic floor or surface temperature controller with remote sensor (for floor heating/wall and ceiling heating/tiled stove) HTRRB

Surface-mounted installation – Design Berlin 2000

Accessories	Item no.	Features	PG
HF-8/4-K2 	G8000370	General features: Spare sensor for HTRRB-011.010 Ambient temperature: -5...+70 °C Protection rating: IP 65 Sensor: NTC Connecting cable: 4 m, PVC	II
HF-8/6-K2 	G8000368	General features: Spare sensor for HTRRB-011.010 Ambient temperature: -5...+70 °C Protection rating: IP 65 Sensor: NTC Connecting cable: 6 m, PVC	II
HF-5/4-K3 	G9031456	General features: Spare sensor for HTRRB-011.410 Ambient temperature: -50...+150 °C Protection rating: IP 65 Sensor: NTC Connecting cable: 4 m, silicone, H05SS-F <VDE> 2 x 0.75 mm ²	III
WP-01 	G9990180	General features: heat conduction paste 2 ml; R > 1 TΩ/cm, silicone-free Heat conductivity: > 0.7 W/mK Ambient temperature: -40...+150 °C	II
THF 	C1809515	General features: protective sleeve for screed mounting (for sleeve sensor HF Ø 7.7, for example, HF-8/4-K2 or HF-8/6-K2), copper	II

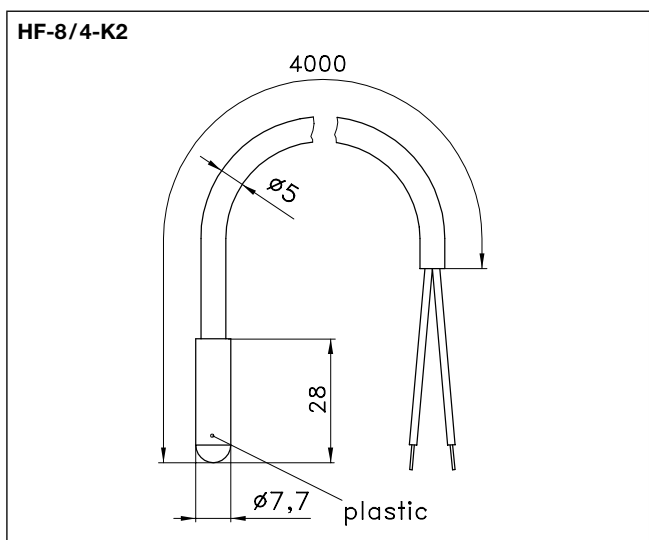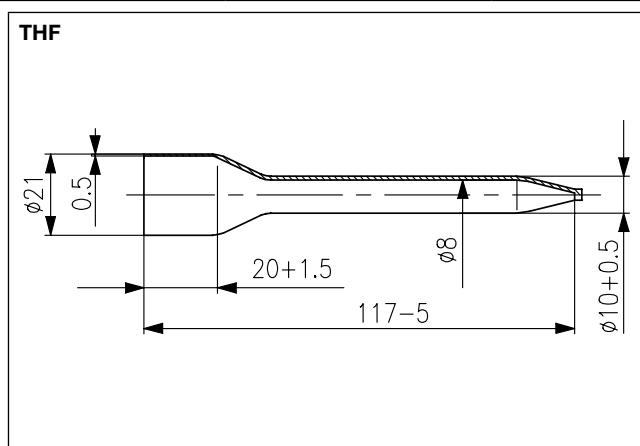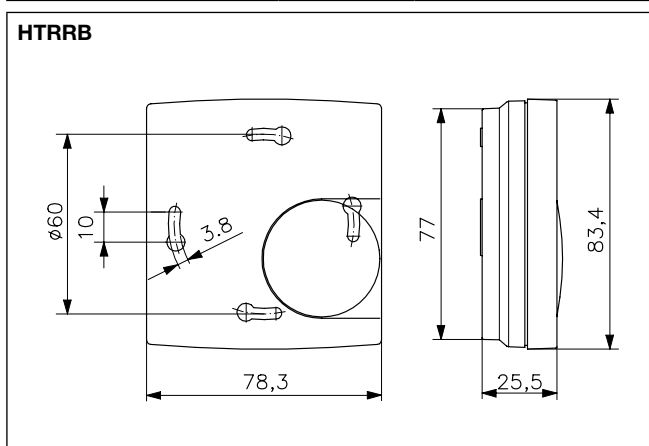

Electronic floor temperature controller with clock and remote sensor (for floor heating/wall and ceiling heating) HTRRBu

Surface-mounted installation – Berlin 3000



Technical data

Design:	Berlin 3000
Surface finish:	matt
Housing colour:	pure white, like RAL 9010
Housing material:	ABS plastic
Operating voltage:	230 VAC, 50 Hz
Ambient temperature:	0 ... 30 °C
Storage temperature:	-20 ... +70 °C
Permissible atmospheric humidity:	Max. 95% rel. humidity, non-condensing
Electrical connection:	screw-type terminals 0.5 ... 1.5 mm ²
Mounting/attachment:	surface/wall mounting or by means of an adapter plate on a flush-mounted socket
Protection rating:	IP 30
Protection class:	II, if properly mounted
Safety and EMC:	according to DIN EN 60730
Max. switching current:	Heating (terminal 4) 13 (2) A, clock output (terminal 3) 100 mA
Max. switching voltage:	230 VAC, 50 Hz
Min. switching voltage:	230 VAC, 50 Hz
Switching power:	terminal 4: 3000 W, terminal 3: 23 W
Switching element:	relay
Switching contact:	NO contact
Output signal:	switching (230 VAC, 50 Hz)
Sensor:	external, NTC
Control function:	heating
Control range:	10 ... 42 °C
Hysteresis:	approx. 1 K
Display type:	symbol display
Output "temperature reduction":	switching (230 VAC, 50 Hz), for pilot function

Application

Time-dependent temperature control (for example, of electrical heating systems) for floor, fringe zone, bathroom, ceiling, tiled stove, marble and wall heating systems or tempering systems.

It can be used as a master (pilot regulator) for the temperature reduction of other controllers. Controllers of the series FETR, RTBSU and RTBSB are suitable for use as slaves (satellite controllers).

Note: The sensor line must be routed in a protective duct. Parallel routing together with lines that carry AC voltage is not permissible.

Programming procedures for every day, familiar from mechanical timers, by means of "electronic tabs". Shortest switching time 15 min.

General features:

Pilot function; ECO function; ECO value adjustable; display "ECO"; display "On/Off"; display "Heating"; child-safe features; power reserve (approx. 4-7 days); learning function; valve protection; holiday setting; party setting; automatic adjustment to standard/daylight savings time; mechanical range limitation; reduction/comfort/automatic button; external setting; operation using direct-dial buttons; on/off button; information button; party function button; holiday setting button





Type/image	Item no.	Features	Circuit diagram	PG
HTRRBu-110.021	MA600400	With backlighting		I





Accessories: terminal strips: VOOPL compatible valve actuators: ZBOOA-010.100

Electronic floor temperature controller with clock and remote sensor (for floor heating/wall and ceiling heating) HTRRBu



Surface-mounted installation – Berlin 3000

Accessories	Item no.	Features	PG
JZ-17 	MN990001	General features: Adapter plate for mounting devices on flush-mounted sockets (including fastening screws for mounting the controller on the adapter plate) Surface finish: matt Colour: pure white, like RAL 9010 Material: ABS plastic	II
HF-8/4-K2 	G8000370	General features: Spare sensor for HTRRBu-110.021 Ambient temperature: -5...+70 °C Protection rating: IP 65 Sensor: NTC Connecting cable: 4 m, PVC	II
HF-8/6-K2 	G8000368	General features: Spare sensor for HTRRBu-110.021 Ambient temperature: -5...+70 °C Protection rating: IP 65 Sensor: NTC Connecting cable: 6 m, PVC	II
WP-01	G9990180	General features: Heat conduction paste 2 ml; R > 1 TΩ/cm, silicone-free Ambient temperature: -40...+150 °C	II
THF 	C1809515	General features: protective sleeve for screed mounting (for sleeve sensor HF Ø 7.7, for example, HF-8/4-K2 or HF-8/6-K2), copper	II

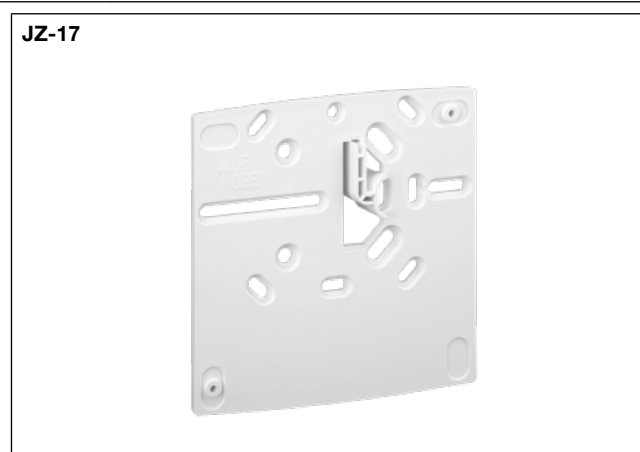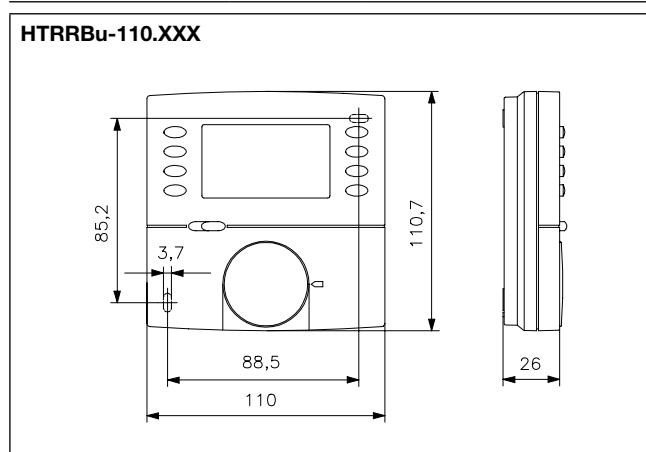

Factory setting:

- Setback temperature 1.7 °C
- Continuous time display
- Programme display using switching segments enabled
- Child-safe features disabled
- Automatic adjustment to summer/winter time enabled
- Valve and pump protection disabled
- Learning function disabled
- Comfort times: Mon–Fri 5 am–9 am/4 pm–10 pm, Sat/Sun 6 am–10 pm
- Sensor rupture and short-circuit safeguarding:
 In case of a sensor rupture or sensor short-circuit, the heating is activated with a power-on time of 30% to prevent cooling or frost damage in the room. Temperatures below -20 °C are also interpreted as sensor rupture, and the emergency function is triggered.

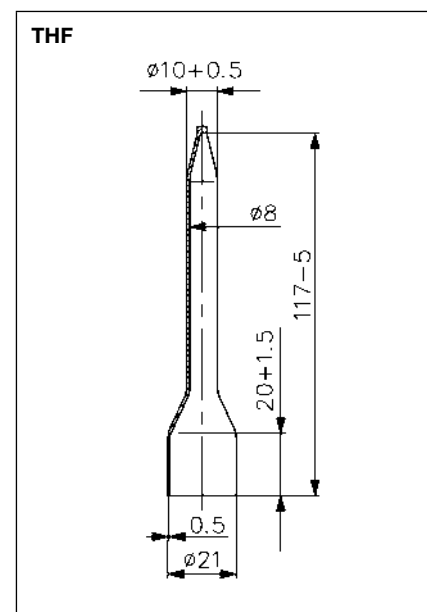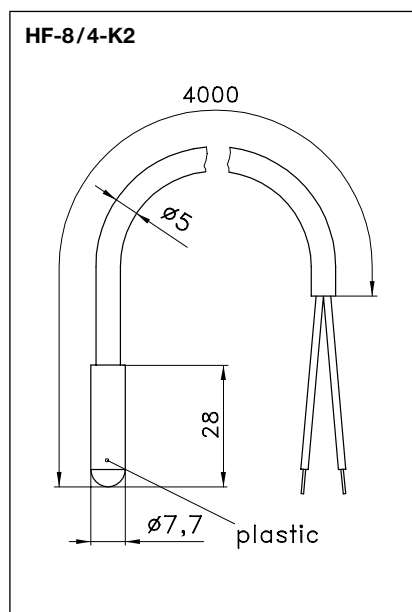





Electronic floor temperature controller with remote sensor (for floor heating/wall and ceiling heating) FETR

Flush-mounted installation – Design Berlin UP











Technical data	Application
<p>Design: Berlin UP (flush-mounted)</p> <p>Housing material: PC plastic</p> <p>Operating voltage: 230 VAC, 50 Hz</p> <p>Storage temperature: -20 ... +70 °C</p> <p>Permissible atmospheric humidity: Max. 95% rel. humidity, non-condensing</p> <p>Electrical connection: screw-type terminals</p> <p>Mounting/attachment: In flush-mounted socket (deep flush-mounted socket recommended), can be adapted with 50 x 50 mm or 55 x 55 mm cover set to fit virtually any switch range</p> <p>Protection rating: IP 30</p> <p>Protection class: II, if properly mounted</p> <p>Safety and EMC: according to DIN EN 60730</p> <p>Max. switching voltage: 230 VAC, 50 Hz</p> <p>Min. switching voltage: 230 VAC, 50 Hz</p> <p>Switching element: relay</p> <p>Switching contact: NO contact</p> <p>Output signal: switching (230 VAC, 50 Hz)</p> <p>Sensor: external or internal/external (monitors)</p> <p>Sensor type (external): HF-8/4-K2</p> <p>Sensor rupture and short-circuit protection: heating is switched off</p> <p>Sensor wire extendable up to: 50 m with min. 0.5 mm² double-insulated</p> <p>Control function: heating</p> <p>Hysteresis: < 1 K</p> <p>General features: ECO function; "reduction" display; "heating" display</p> <p>Input "temperature reduction": approx. 5 K (230 VAC, 50 Hz)</p>	<p>Temperature control (e.g., of electrical heating systems) for floor, fringe zone, bathroom, ceiling, tiled stove, marble and wall heating systems or tempering systems, direct floor heating systems.</p> <p>Reduction: With these flush-mounted controllers, the temperature can be reduced by 5 K. For this purpose, potential is applied to the clock input terminal by an external pilot controller or an external timer L1.</p> <p>Note: The sensor line must be routed in a protective duct. Parallel routing together with lines that carry alternating currents is not admissible.</p> <p>The 55 x 55-mm variants visually fit perfectly without an insert frame in many switch ranges of 55 x 55 mm.</p> <p>Using an insert frame, the 50 x 50-mm variants fit in almost all switch ranges.</p> <p>See page 86 for an overview of currently possible combinations and insert frames.</p>

Type/image	Item no.	Features	Circuit diagram	PG
 <p>FETR 101.700#07</p>	UN030000	<p>General features: Floor temperature controllers; internal setting; multi-digit display 1 ... 6</p> <p>Ambient temperature: 0 ... 40 °C</p> <p>Max. switching current: 16 (2) A</p> <p>Switching power: 3680 W</p> <p>Control range: 10 ... 60 °C</p> <p>Scope of delivery: controller, remote sensor 4 m, cover 50 x 50 mm, pure white (like RAL 9010), glossy</p>		I
 <p>FETR 101.715#00</p>	UA030119	<p>General features: Floor temperature controller; mechanical range limitation; "on/off" switch; external setting; protective cap; contact hazard protection cover plate; multi-digit display 1 ... 5</p> <p>Ambient temperature: 0 ... 40 °C</p> <p>Max. switching current: 16 (2) A</p> <p>Switching power: 3680 W</p> <p>Control range: 10 ... 50 °C</p> <p>Scope of delivery: controller, remote sensor 4 m</p> <p>Cover sets are offered in various designs (see the separate overview, "alre flush-mounted range (cover sets)") and are not included in the delivery.</p> <p>Suitable set no: JZ-005.xxx, for example: cover set 50 x 50 mm, pure white, glossy: JZ-005.000 cover set 55 x 55 mm, pure white, glossy: JZ-005.100</p>		I



Electronic floor temperature controller with remote sensor (for floor heating/wall and ceiling heating) FETR

Flush-mounted installation – Design Berlin UP

Type/image	Item no.	Features	Circuit diagram	PG
	UN030109	like FETR 101.715#00, but with scope of delivery: controller, remote sensor 4 m, alre frame "Berlin" (neutral), cover 50 x 50 mm, pure white (like RAL 9010), glossy		I
	UA030502	like FETR 101.715#00, but with control range 10 ... 42 °C (multi-digit display 1 ... 4) Cover sets are offered in various designs (see the separate overview, "alre flush-mounted range (cover sets)") and are not included in the delivery. Suitable set no: JZ-009.xxx, e.g.: cover set 50 x 50 mm, pure white, glossy: JZ-009.000 cover set 55 x 55 mm, pure white, glossy: JZ-009.100 Complete device with alre frame "Berlin" (neutral), cover 50 x 50 mm (pure white, like RAL 9010, glossy) on request.		I
	UA030412	General features: Room temperature controller with floor monitoring; mechanical range limitation; multi-digit display *... 6; "on/off" switch ; external setting; protective cap; contact hazard protection cover plate Ambient temperature: 0 ... 30 °C Max. switching current: 10 (1.5) A Switching power: 2300 W Control range: 5 ... 30 °C (room), 20 ... 60 °C (internal scale for limiting the floor temperature) Scope of delivery: controller, remote sensor 4 m Cover sets are offered in various designs (see the separate overview, "alre flush-mounted range (cover sets)") and are not included in the delivery. Suitable set no: JZ-006.xxx, for example: cover set 50 x 50 mm, pure white, glossy: JZ-006.000 cover set 55 x 55 mm, pure white, glossy: JZ-006.100 Complete device with alre frame "Berlin" (neutral), cover 50 x 50 mm (pure white, like RAL 9010, glossy) on request.		I
Accessories	Item no.	Features		PG
	G8000370	General features: Spare sensor for FETR 101.7xx Ambient temperature: -5 ... +70 °C Protection rating: IP 65 Sensor: NTC Connecting cable: 4 m, PVC		II
	G8000368	General features: Spare sensor for FETR 101.7xx Ambient temperature: -5 ... +70 °C Protection rating: IP 65 Sensor: NTC Connecting cable: 6 m, PVC		II
	G9990180	General features: Heat conduction paste 2 ml; R > 1 TΩ/cm, silicone-free Ambient temperature: -40 ... +150 °C		II
	C1809515	General features: protective sleeve for screed mounting (for sleeve sensor HF Ø 7.7, for example, HF-8/4-K2 or HF-8/6-K2), copper		II

Electronic floor temperature controller with remote sensor (for floor heating/wall and ceiling heating) FETR

Flush-mounted installation – Design Berlin UP

Accessories	Item no.	Features	PG
	JZ-090.900 VV000025	General features: alre frame "Berlin" (neutral) for all flush-mounted controllers with cover 50 x 50 mm Design: Berlin Surface finish: Glossy Colour: Pure white, like RAL 9010 Material: PC plastic	I
	JZ-090.910 VV000010	General features: alre frame "Berlin" (neutral) for all flush-mounted controllers with cover 50 x 50 mm Design: Berlin Surface finish: Glossy Colour: Pearl white, like RAL 1013 Material: PC plastic	I

alre flush-mounted range (cover sets)

all basic types and suitable cover sets **50 x 50 mm**

Basic type	Cover set 50 x 50 mm pure white (RAL 9010) glossy (JZ-xxx.000)	Cover set 50 x 50 mm pure white (RAL 9010) matt (JZ-xxx.001)	Cover set 50 x 50 mm pearl white (RAL 1013) glossy (JZ-xxx.010)	Cover set 50 x 50 mm traffic/studio white (RAL 9016) glossy (JZ-xxx.020)	PG				
	Cover set	Item no.	Cover set	Item no.	Cover set	Item no.	Cover set	Item no.	
FETR 101.715#00	JZ-005.000	UN990003	JZ-005.001	UN990006	JZ-005.010	UN990009	JZ-005.020	UN990075	I
FETR 101.716#00	JZ-009.000	UN990004	JZ-009.001	UN990007	JZ-009.010	UN990010	JZ-009.020	UN990076	I
FETR 101.745#00	JZ-006.000	UN990005	JZ-006.001	UN990008	JZ-006.010	UN990011	JZ-006.020	UN990077	I
Basic type	Cover set 50 x 50 mm traffic white (RAL 9016) matt (JZ-xxx.021)								PG
	Cover set	Item no.							
FETR 101.715#00	JZ-005.021	UN990104							I
FETR 101.716#00	JZ-009.021	UN990106							I
FETR 101.745#00	JZ-006.021	UN990105							I








In flush-mounted socket, it can be adapted to fit virtually any switch range.

all basic types and suitable cover sets **55 x 55 mm**

Basic type	Cover set 55 x 55 mm pure white (RAL 9010) glossy (JZ-xxx.100)	Cover set 55 x 55 mm pure white (RAL 9010) matt (JZ-xxx.101)	Cover set 55 x 55 mm pearl white (RAL 1013) glossy (JZ-xxx.110)	Cover set 55 x 55 mm traffic/studio white (RAL 9016) glossy (JZ-xxx.120)	PG				
	Cover set	Item no.	Cover set	Item no.	Cover set	Item no.	Cover set	Item no.	
FETR 101.715#00	JZ-005.100	UN990012	JZ-005.101	UN990015	JZ-005.110	UN990018	JZ-005.120	UN990091	I
FETR 101.716#00	JZ-009.100	UN990013	JZ-009.101	UN990016	JZ-009.110	UN990019	JZ-009.120	UN990092	I
FETR 101.745#00	JZ-006.100	UN990014	JZ-006.101	UN990017	JZ-006.110	UN990020	JZ-006.120	UN990093	I

Electronic floor temperature controller with remote sensor (for floor heating/wall and ceiling heating) FETR

Flush-mounted installation – Design Berlin UP

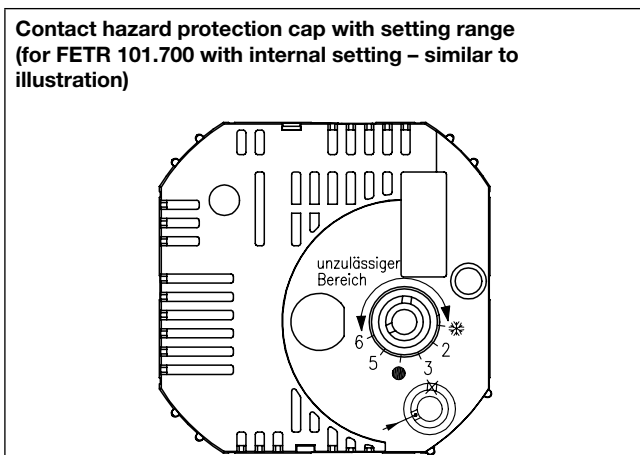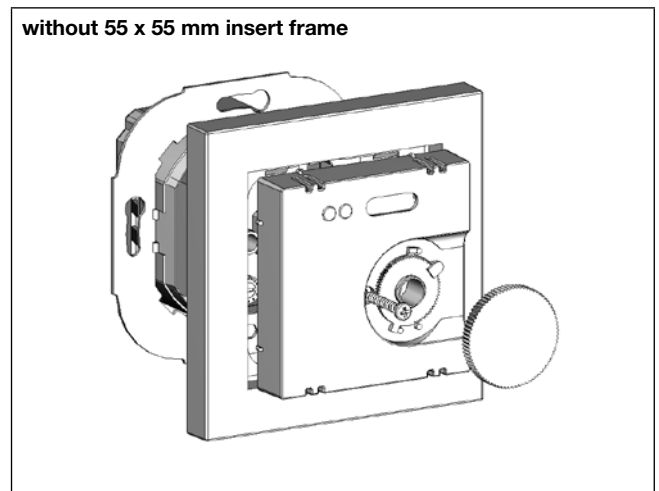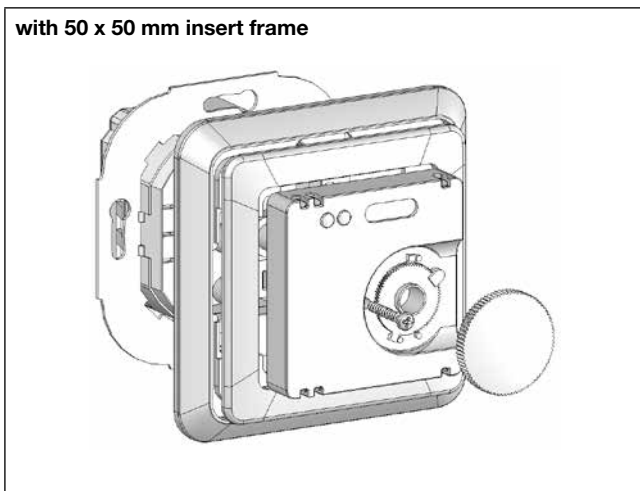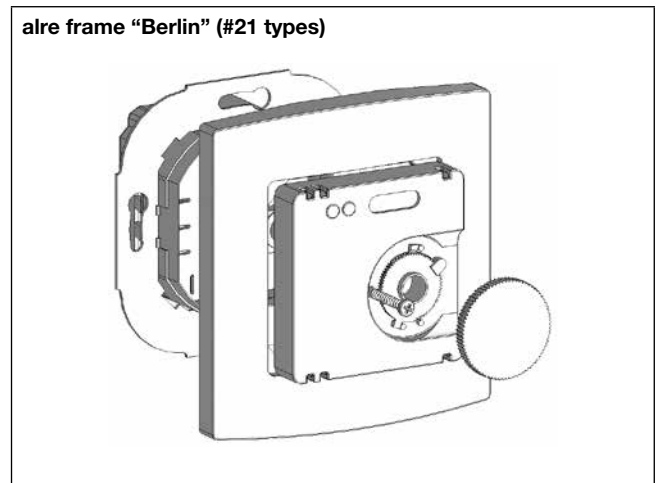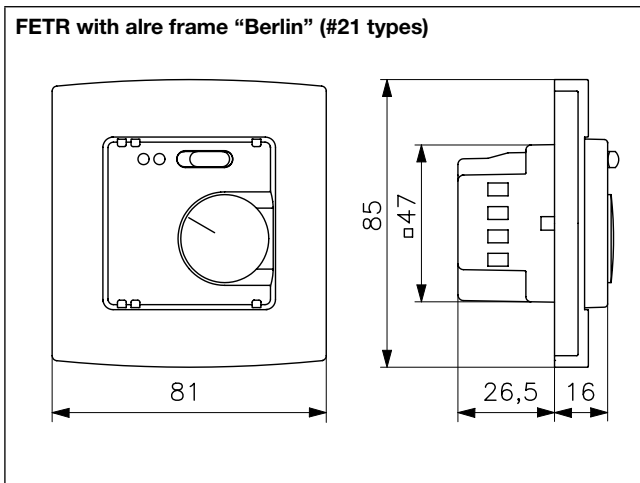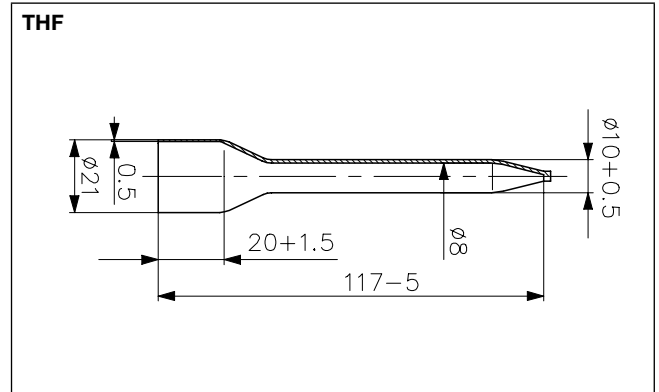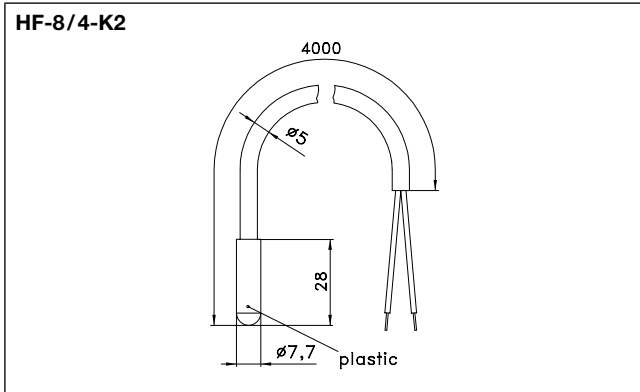

Electrothermal valve actuators

for heating, ventilation and air conditioning technology



Technical data



Housing colour:	pure white, like RAL 9010
Housing material:	PC plastic, GF (20%)
Ambient temperature:	0 ... 50 °C
Storage temperature:	-20 ... +70 °C
Permissible atmospheric humidity:	max. 95% rel. humidity, non-condensing
Mounting/attachment:	M 30 x 1.5
Protection rating:	IP 42
Protection class:	II
Safety and EMC:	according to DIN EN 60730
Average power consumption:	approx. 3 W
Opening/closing time:	approx. 4 min
Nominal stroke:	3 mm
Function type:	normally closed
Nominal closing force:	90 N
Connecting cable:	0.8 m / 2 x 0.5 mm ²
Valve position indicator:	2X (at the top and the side)

Application

Extremely compact design:
Can be fitted quickly and comfortably thanks to the slim shape in the area around the fastening nut.

Can be fitted in any position:
Lateral drainage holes carry off any leakage water that from the valve plunger into the open, thus avoiding damage to the drive.

Additional valve monitoring:
Two additional viewing windows at the side allow users to visually check the respective valve position with ease; this does not work when mounted in a suspended manner.

Type/image	Item no.	Features	PG
 ZBOOA-010.100	H9100010	Operating voltage: 230 V~, 50 Hz Max. power consumption: 70 W Max. starting current: approx. 0.3 A	I
 ZBOOA-040.100	H9100000	Operating voltage: 24 VDC or 24 VAC Max. power consumption: 12 W Max. starting current: approx. 0.5 A	I

Thanks to their M 30 x 1.5 fastening and their characteristics (normally closed), the actuators are suitable for the following valve and distributor makes: Beulco, Empur, Heimeier, Kamo, Oventrop, Purmo, SBK, SKV, Strawa, Taconova, Watts

Brief description:

The drive features a compact, space-saving design.

The device can be mounted easily thanks to the narrowed shape, especially in the fastening area of the nut.

The fastening cable is not located near the fastening nut. This reduces the probability of contact with equipment carrying hot water.

Since the fastening nut allows continuous screwing onto the thread, by unscrewing the nut by two or three turns, it is possible to open the valve in an electrically de-energised state – something that cannot be done with bayonet couplings and impulse couplings.

Discharged water is dissipated via a draining system.



Gaskets are not required thanks to the careful design.

The double position display has the following advantages:

The upper display provides the option of a visual or, in conditions of bad visibility, tactile function test of the drive.


The lower viewing windows allow an additional check to determine whether the valve to be actuated follows the lifting movement of the drive.

At the beginning of the heating period, it can happen off and on that the valve plungers get “stuck”. Therefore, with the additional display, it is possible to determine whether the cause lies with the actuator or with the valve in the event the valve does not open. However, that is not possible when mounted in a suspended manner.

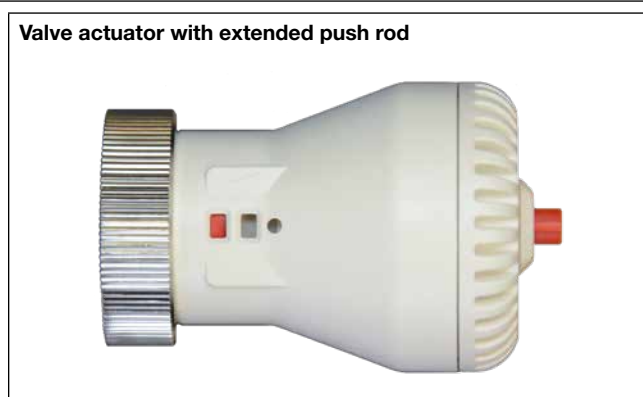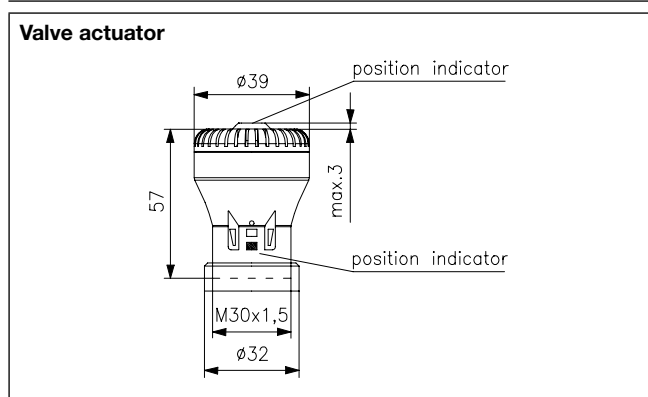

Terminal strip for heating manifold

for 6 or 8 room thermostats



Technical data	Application
<p>Surface finish: Upper part glossy, lower part matt</p> <p>Housing colour: Upper part transparent, lower part anthracite grey, like RAL 7016</p> <p>Housing material: PC plastic</p> <p>Operating voltage: 230 VAC/50 Hz</p> <p>Ambient temperature: -10 ... +50 °C</p> <p>Storage temperature: -20 ... +70 °C</p> <p>Permissible atmospheric humidity: Max. 95% rel. humidity, non-condensing</p> <p>Electrical connection: Spring terminals 0.75 mm² to 1.5 mm² for rigid cables 0.5 mm² to 1 mm² for flexible cables</p> <p>Protection rating: IP 20</p> <p>Mounting/attachment: Surface/wall mounting with 4 fastening screws included in delivery or using optional JZ-32 magnetic fastening set</p> <p>Protection class: II, if properly mounted</p> <p>Control function: heating or cooling</p> <p>General features: Ready for operation display (mains voltage), active channels display, integrated strain relief, labelling fields</p>	<p>Terminal strip for heating controller with or without ECO function, also for heating/cooling controller with integrated heating/cooling switch. Depending on the controller used, actuators can be connected in the NC (normally closed) or NO (normally open) mode of operation.</p> <p>Can be set up with master-slave control when using a clock regulator or an external timer.</p>

Type/image	Item no.	Features	PG
<p>VOOPL-216.176</p>	DA480510	General features: Terminal strip in housing for wiring up to 6 room thermostats and up to 12 actuators; (channel 1-2: 1 actuator / channel 3: 4 actuators / channel 4-6: 2 actuators), T3,15 A/250 V device fuse, installation dimensions Ø 5 x 20 mm (also secures the circuits of the connected controllers and valve gears)	I
<p>VOOPL-318.178</p>	DA480520	General features: Terminal strip in housing for wiring up to 8 room thermostats and up to 16 actuators; (channel 1-2: 1 actuator / channel 3, 5-8: 2 actuators / channel 4: 4 actuators), T3,15 A/250 V device fuse, installation dimensions Ø 5 x 20 mm (also secures the circuits of the connected controllers and valve gears)	I


other/similar items: VOORL terminal strip for heating and cooling
Accessories: suitable valve actuators ZBOOA

Accessories	Item no.	Features	PG
<p>JZ-32</p>	BN990005	General features: Magnetic fastening set for simple and safe fastening of the VOOPL terminal strip on a metallic substrate (for example, heating manifold)	II


Terminal strip for heating manifold

for 6 or 8 room thermostats


VOOPL-216.176

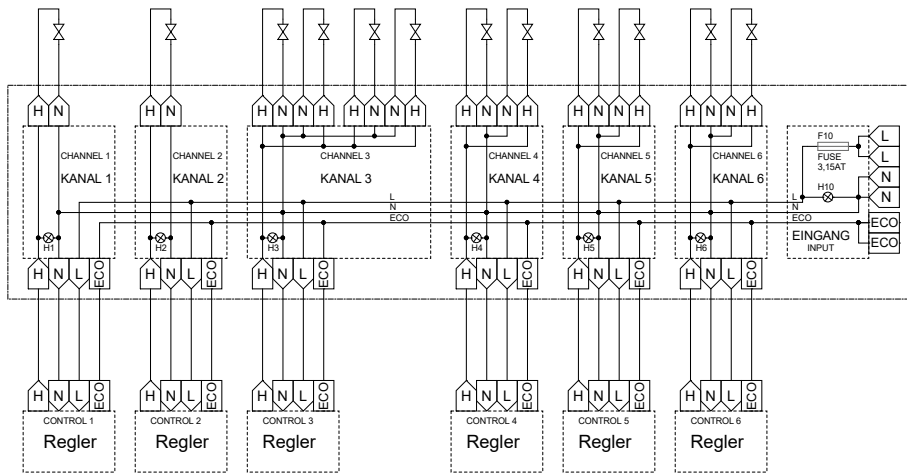


VOOPL-318.178

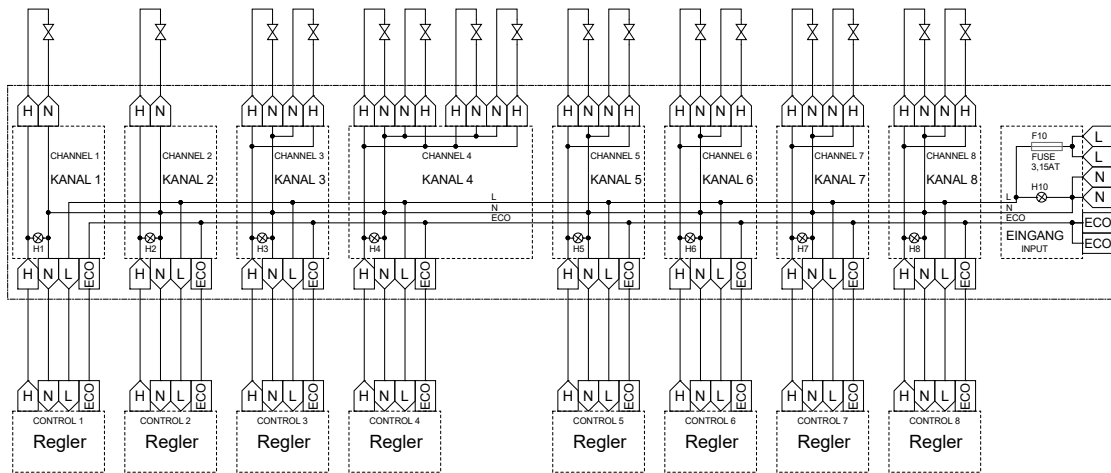

VOOPL-216.176

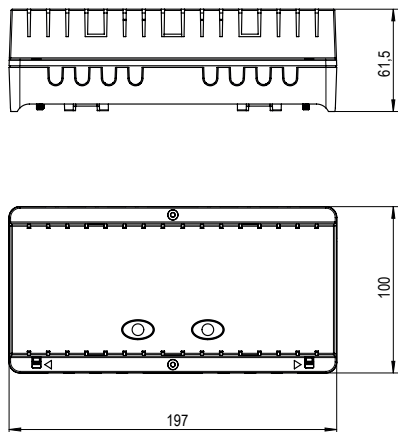

VOOPL-318.178

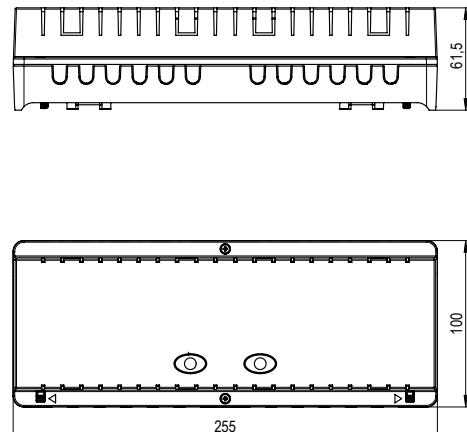


Notes and examples of wiring for VOOPL terminal strips

1 heating system with master-slave time zone

The controllers and valve actuators are supplied with power via the terminal strip.

The equipment and features of the individual controller types can be found in the controller matrix on page 60. The information listed in this matrix applies for normally closed valve actuators.

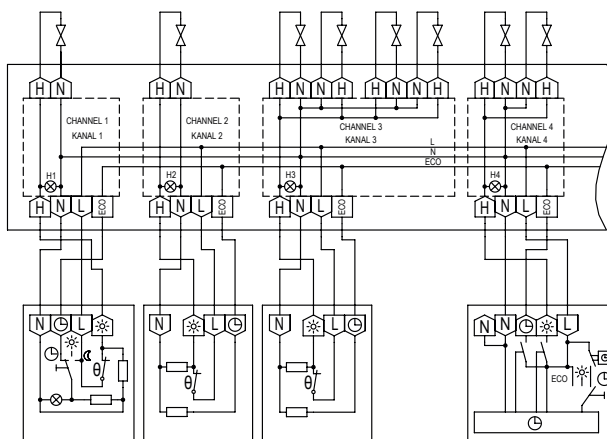


Study RTBSB-201.075/ RTBSU-401.075 (slave)	Children's room RTBSB-201.002/ RTBSU-401.002 (slave)	Living room RTBSB-201.002/ RTBSU-401.002 (slave)	Bedroom HTRRBu 110.117 (master time zone 2 slave)
---	---	---	--

2 Cooling system

The controllers and valve actuators are supplied with power via the terminal strip.

The equipment and features of the individual controller types can be found in the controller matrix on page 60. The information listed in this matrix applies for normally closed valve actuators.

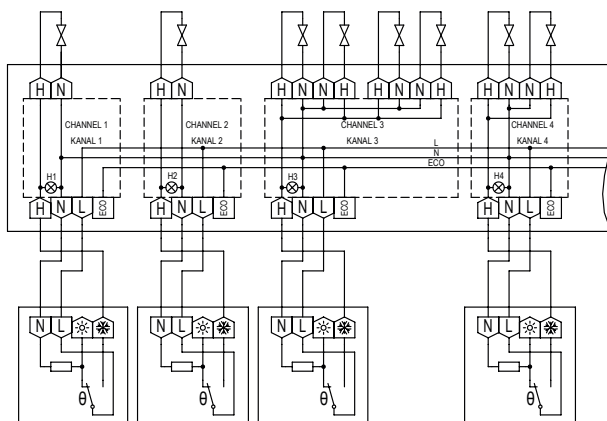


Study RTBSB-201.010/ RTBSU-401.010	Children's room RTBSB-201.010/ RTBSU-401.010	Living room RTBSB-201.010/ RTBSU-401.010	Bedroom RTBSB-201.010/ RTBSU-401.010
--	--	--	--

3 Heating/cooling systems with heating/cooling switches at the controllers

The controllers and valve actuators are supplied with power via the terminal strip.

The equipment and features of the individual controller types can be found in the controller matrix on page 60. The printing on the heating/cooling changeover switches on the RTBSU-401.065 and RTBSU-401.063 applies to normally closed valve actuators. The medium status "hot" or "cold" must always correspond to the switch settings.

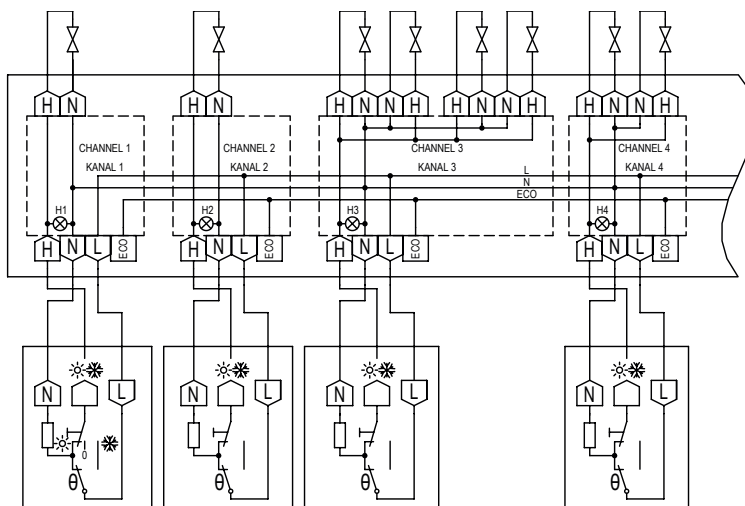

Study RTB- SU-401.063	Children's room RTBSB-201.065/ RTBSU-401.065	Living room RTBSB-201.065/ RTBSU-401.065	Bedroom RTBSB-201.065/ RTBSU-401.065
--------------------------	--	--	--

AIR CONDITIONING TECHNOLOGY



Air conditioning technology



When it gets too hot,
you can rely on our help.



AIR CONDITIONING TECHNOLOGY

The perfect climate for your comfort.

Office buildings, hotel rooms and living rooms require efficient control technology for the perfect climate. The key parameters in this context are temperature and humidity. The optimum combination of these provides an ambient temperature tailored to individual needs.

Safe and comfortable operation is what sets our controllers apart. Our devices offer numerous additional functions to continue to control the temperature in an economical and environmentally friendly manner – including in the evening and at night. This means that any energy not required is saved, which reduces the impact on the environment and your wallet.

Comfort thanks an ideal indoor climate.








Application examples:

- Cooling ceilings
- Fan coils
- Hot water underfloor heating
- Air distribution systems
- Partial air conditioners
- Heat pumps
- AC split units
- Dew point monitoring
- Relative humidity control
- Accessories such as terminal strips and actuators




AIR CONDITIONING TECHNOLOGY overview:

Climate controllers

	Overview of devices	114
	Electronic with triac output (noiseless)	115
	Bimetal (mechanical) "surface-mounted"	116–117
	Electronic "surface-mounted" (including for EC fans)	118–119
	Electronic for cooling ceilings or surface heating / cooling systems, "flush-mounted"	120–122
	Electronic for cooling ceilings or surface heating / cooling systems, "flush-mounted"	123–125
	Electronic for cooling ceilings or surface heating / cooling systems, "flush-mounted" with clock (including for EC fans)	127–131
	Continuous electronic climate controller, "surface-mounted"	132–134



Dew point monitoring

	Dew point monitor	135
	Dew point sensors	136–137

Hygrostats / Hygro-thermostats

	Room "surface-mounted / flush-mounted"	138–140
---	--	---------

Terminal strips for heating / cooling manifolds / valve actuators

	Terminal strips for heating / cooling manifolds	141–143
	Thermal valve actuators	144

Type		KTRTB-211.108	KTRTB-251.108	KTBSB-112.000	KTBSB-113.500	KTBSB-112.070	KTRRB-117.128	KTRRB-117.163	KTRRB-117.169	KTRRB-052.244	KTRRB-052.245	KTRRU-052.245	KTRRUu 217.456	KTRRUu 257.456	KTRVB-048.100	KTRVB-048.200	KTRVB-052.244	KTRVB-052.245
Page		115	115	116	116	116	118	118	118	120	121	123	127	129	133	133	134	134
Housing design	Berlin 1000	x	x															
	Berlin 2000									x	x				x	x	x	x
	Berlin 3000			x	x	x	x	x	x									
	Berlin flush-mounted kit											x	x	x				
	Pikolo																	
Sensor	Bimetal (toggler)			x	x	x												
	NTC internal	x	x				x	x	x	x	x	x	x	x	x	x	x	x
	NTC external						x	x	x	x	x	x	x				x	x
	Floor monitor (NTC)																	
	Dew point sensor (external)									x	x	x	x	x			x	x
Control type	Climate controllers	x	x															
	Climate controller (0... 10 V)								x				x	x	x	x	x	x
	Climate controller with fan output			x	x								x	x				
	Climate controller with neutral zone							x		x	x	x	x	x			x	x
	Climate controller with neutral zone and fan output					x	x		x				x	x				
	Mixing chamber controller (0... 10 V)														x	x		
Pipe system	Air conditioning controller as a 2-pipe system	x	x				x	x	x	x	x	x	x	x			x	x
	Air conditioning controller as a 4-pipe system			x	x	x	x	x	x	x	x	x	x	x			x	x
Application examples	Hot water floor heating									x	x	x	x	x	x	x	x	x
	Fan coil			x	x	x	x		x									
	Air distribution systems			x	x	x	x											
	Partial air conditioner	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
	Cooling ceiling	x	x							x	x	x	x	x	x	x	x	x
	Heat pump				x													
AC split unit				x														
Features	Input "ECO"	x	x				x	x	x	x	x	x	x	x			x	x
	Input "changeover — heating/cooling"	x	x							x	x	x	x	x			x	x
	Input "off with frost protection monitoring"						x	x	x	x	x		x	x				
	Switch "on/off"			x	x	x												
	Switch "on/off with frost protection monitoring"						x	x	x									
	Switch "heating/cooling"																	x
	Switch "heating/ventilation/cooling"				x													
	Switch "ECO/comfort/off with frost protection monitoring"										x	x						x
	Switch "ventilator"			x	x	x	x		x									
	Indicator lamp "ON/OFF"				x													
	Indicator lamp "heating mode"				x													
	Indicator lamp "heating"	x	x							x	x	x	x	x			x	x
	Indicator lamp "cooling"	x	x							x	x	x	x	x			x	x
	Indicator lamp "heating/cooling"				x													
Indicator lamp "cooling interruption due to condensate"									x	x	x					x	x	
Miscellaneous	230 V~	x		x	x	x	x	x	x				x					
	24 V~		x							x	x	x		x	x	x	x	x

Electronic climate controller with triac output (noiseless)

Surface-mounted “ultra-thin” installation – Design Berlin 1000



Technical data

Design:	Berlin 1000
Surface finish:	glossy
Housing colour:	pure white, like RAL 9010
Housing material:	ABS plastic
Ambient temperature:	0...40 °C
Storage temperature:	-20...+70 °C
Permissible atmospheric humidity:	max. 95% rel. humidity, non-condensing
Electrical connection:	screw-type terminals 0.5 mm ² to 1.5 mm ²
Mounting/attachment:	Surface-/wall-mounting (4-hole assembly on flush-mounted socket)
Protection rating:	IP 30
Safety and EMC:	according to DIN EN 60730
Max. power consumption:	< 0.8 W
Switching power:	15 W
Switching element:	triac
Switching contact:	NC contact
Sensor:	NTC, internal
Control function:	heating or cooling
Control range:	5...30 °C
Hysteresis:	0 K since control is practically continuous
Proportional range:	approx. 1 K
General features:	ECO function; “heating/cooling” display; “off with frost protection monitoring” operating mode; mechanical range restriction; scale: degrees Celsius; external setting

Application

This controller was specifically designed for heating/cooling regulation of 2-pipe systems used in hotels, homes and offices and can control up to 5 valve actuators (normally closed).

The KTRTB’s internal sensor measures the room temperature and activates heating or cooling depending on the deviation from the configured setpoint temperature. As the switching element used is a triac rather than a relay or bimetal, the system operates without bothersome switching sounds.

ECO function: if this function is selected, the temperature is adjusted down by 3 K in heating mode and up by 3 K in cooling mode.

Type/image	Item no.	Features	Circuit diagram	PG
	MA700300	Operating voltage: 230 VAC, 50 Hz Protection class: II, if properly mounted Max. switching current: 65 mA Max. switching voltage: 230 VAC, 50 Hz Min. switching voltage: 230 VAC, 50 Hz Output signal: switching PWM (230 VAC, 50 Hz) ECO contact: 230 VAC, 50 Hz, optionally configurable as ECO or OFF function		I
	MA700400	Operating voltage: 24 VAC, 50 Hz Protection class: III, protective low voltage Max. switching current: 625 mA Max. switching voltage: 24 VAC, 50 Hz Min. switching voltage: 24 VAC, 50 Hz Output signal: switching PWM (24 VAC, 50 Hz) ECO contact: optionally configurable as ECO or OFF function		I

Accessories: suitable valve actuators ZBOOA

Accessories	Item no.	Features	PG
	MN990006	Adapter frame for mounting room temperature controllers of the Berlin 1000 series in flush-mounted sockets up to 80 x 80 mm	I
	MA990000	General features: Adjusting knob for B1000 series devices, scale: Degrees Celsius, pure white glossy	I
	MA990001	General features: Adjusting knob for B1000 series devices, multi-digit display 1...6, pure white glossy	I

Mechanical climate controllers KTBSB

Surface-mounted installation – Berlin 3000




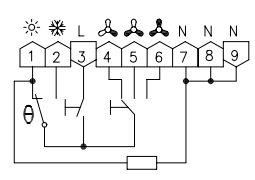

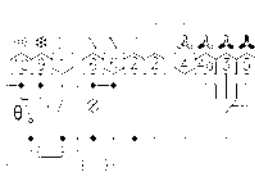

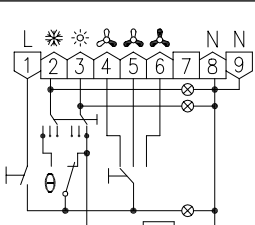
Technical data

Design:	Berlin 3000
Surface finish:	matt
Housing colour:	pure white, like RAL 9010
Housing material:	ABS plastic
Operating voltage:	230 VAC, 50 Hz
Ambient temperature:	0 ... 30 °C
Storage temperature:	-20 ... +70 °C
Permissible atmospheric humidity:	max. 95% rel. humidity, non-condensing
Electrical connection:	screw-type terminals
Mounting/attachment:	surface-/wall-mounting or by means of an adapter plate on a flush-mounted socket
Protection rating:	IP 30
Protection class:	II, if properly mounted
Safety and EMC:	according to DIN EN 60730
Max. switching current:	6 (3) A
Max. switching voltage:	230 VAC, 50 Hz
Min. switching voltage:	230 VAC, 50 Hz
Switching power:	1380 W
Switching element:	bimetallic contact
Switching contact:	changeover
Output signal:	switching (230 VAC, 50 Hz)
Sensor:	bimetal
Control function:	heating or cooling
Control range:	5 ... 30 °C
General features:	mechanical range restriction; thermal feedback; scale: degrees Celsius; on/off switch; external setting

Application

Control and monitoring of temperatures in closed, dry spaces. Remote control of air conditioners, climate chests, fan coil systems in living and office spaces and doctors' practices. Individual room optimisation in central air conditioning systems (hotels, hospitals etc.).

Suitable for all heating systems. (Please note the maximum switching current.)


Type/image	Item no.	Features	Circuit diagram	PG
	MA200100	General features: 3-stage fan output; 3-stage fan switch; "on/off" switch Hysteresis: Approx. 0.5 K at a temperature change of max. 4 K/h		I
	MA200202	General features: single-room climate controller with neutral zone for 4-pipe systems; 3-stage fan output; 2x auxiliary output "on/off"; "on/off" display, 3-stage fan switch; "on/off" switch Hysteresis: Heating approx. 1 K, cooling approx. 2 K, at a temperature change of max. 4 K/h Neutral zone: Approx. 2 K		I
	MA200000	General features: "on/off" display; "heating" display; "cooling" display; for 4-pipe systems; 3-stage fan output; heating/ventilation/cooling switch; 3-stage fan switch; "on/off" switch Hysteresis: Approx. 0.5 K at a temperature change of max. 4 K/h		I

Accessories: Terminal strips VOOP, compatible valve actuators for ZBOOA-010.100, adapter plates to mount in flush-mounted socket JZ-17
 You can find other controllers with outputs for heating/cooling in the "Heating technology" section (RTBSB/RTBSU).

Mechanical climate controllers KTBSB

Surface-mounted installation – Berlin 3000

Accessories	Item no.	Features	PG
JZ-17	MN990001	<p>General features: Adapter plate for mounting devices on flush-mounted sockets (including fastening screws for mounting the controller on the adapter plate)</p> <p>Surface finish: Matt</p> <p>Housing colour: Pure white, like RAL 9010</p> <p>Housing material:ABS plastic</p>	II

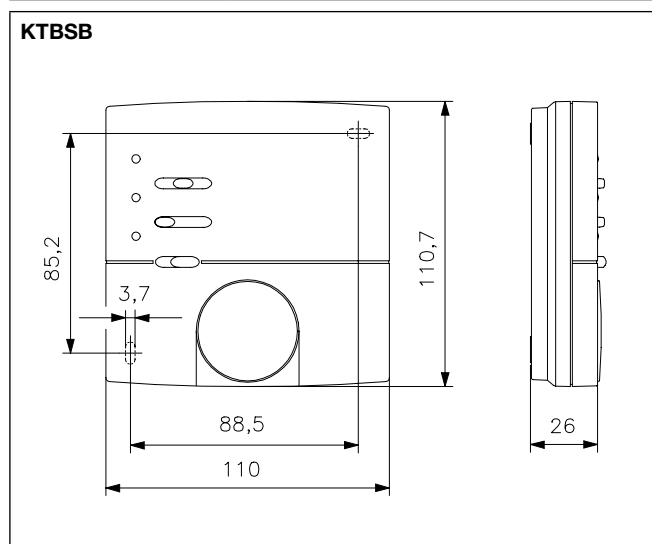

Electronic climate controller, KTRRB

Surface-mounted installation – Design Berlin 3000



Technical data




Design:	Berlin 3000
Surface finish:	matt
Housing colour:	pure white, like RAL 9010
Housing material:	ABS plastic
Operating voltage:	230 VAC, 50 Hz
Ambient temperature:	0 ... 40 °C
Storage temperature:	-20 ... +70 °C
Permissible atmospheric humidity:	max. 95% rel. humidity, non-condensing
Electrical connection:	screw-type terminals
Mounting/attachment:	surface-/wall-mounting or by means of an adapter plate on a flush-mounted socket
Protection rating:	IP 30
Protection class:	II, if properly mounted
Safety and EMC:	according to DIN EN 60730
Max. switching voltage:	230 VAC, 50 Hz
Min. switching voltage:	230 VAC, 50 Hz
Switching element:	relay
Switching contact:	NO contact
Output signal:	switching (230 VAC, 50 Hz)
Sensor:	internal NTC, optional external NTC "Sensor 2"
ECO contact*:	reduction by 3 K; alternatively, this input can be configured as a frost protection contact
Control function:	heating and/or cooling
Control range:	5 ... 30 °C
Neutral zone:	approx. 2 K
General features:	operating mode "off with frost protection monitoring"; mechanical range restriction; scale: degrees Celsius; external setting

Application

Single-room temperature controller with neutral zone for 2-pipe or 4-pipe air conditioners.

External flow sensor (H/C sensor):
For automatically switching the controller to heating or cooling mode in 2-pipe operation depending on the inflow temperature; alternatively, this input can be used as an H/C changeover contact.

Sensor rupture and short-circuit protection:
In case of a sensor rupture or sensor short-circuit, the heating is activated with a power-on time of 30% to prevent cooling or frost damage in the room.

Type/image	Item no.	Features	PG
	MA601300	General features: single-room climate controller, 3-stage fan output, fan operation in neutral zone ON/OFF selectable; on/off switch; 3-stage fan switch Max. switching current: heating 5 (1) A, cooling 5 (1) A, fan 3 (1) A Switching power: Heating 1150 W, cooling 1150 W, fan 230 W Hysteresis: Approx. 1 K	I
	MA601400	like KTRRB-117.128 but without 3-stage fan output and 3-stage fan switch	I
	MA601500	General features: Single-room climate controller; "off/manual fan/automatic fan" switch; "ventilator 3-stage 0-10 V" switch; "parametrisation 3-stage fan output" button; "heating, cooling, frost protection, sensor rupture or short circuiting of the external sensor" display; 3-stage fan output 0-10 V with adjustment to individual fan stages or dynamic 0-10 V to activate EC fans; ON/OFF: ventilator operation in neutral zone selectable Max. switching current: heating 5 (1) A, cooling 5 (1) A Switching power: Heating 1150 W, cooling 1150 W Output signal: Analogue 0... 10 V (5 mA) for activating an rpm-controlled fan Hysteresis: Approx. 0.5 K	I


Accessories: Adaptor plate for mounting on flush-mounted socket JZ-17, terminal strips VOOxx (see page 107/141), compatible valve actuators ZBOOA (see page 144), compatible external sensors ("Sensor 2"; see "Sensor Technology").





You can find other/similar controllers with outputs for heating/cooling in the "Heating technology" section (RTBSB/RTBSU).

*With ECO operation, the neutral zone (2 K) is extended by the ECO zone (+/- 3 K). ECO operation is a savings mode that should be controlled, for example, via a window contact and/or a timer.

Electronic climate controller, KTRRB

Surface-mounted installation – Design Berlin 3000

Accessories	Item no.	Features	PG
JZ-17 	MN990001	General features: Adapter plate for mounting devices on flush-mounted sockets (including fastening screws for mounting the controller on the adapter plate) Surface finish: matt Housing colour: pure white like RAL 9010 Housing material: ABS plastic	II

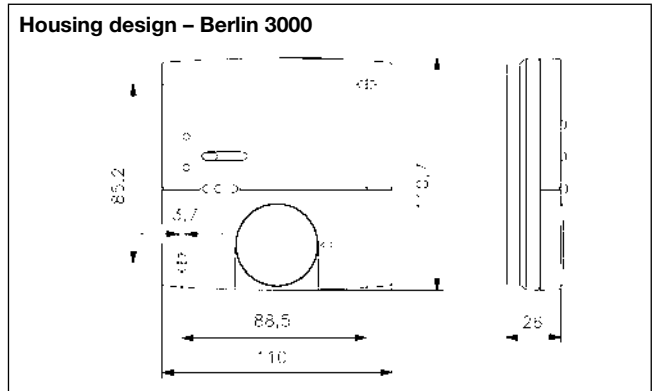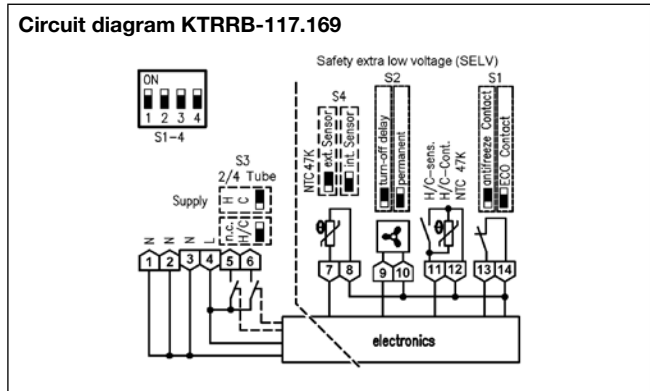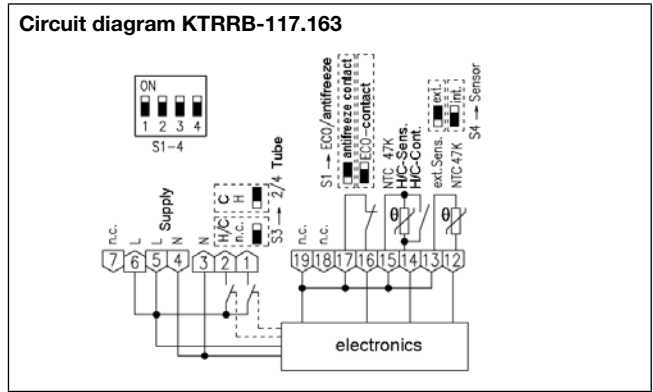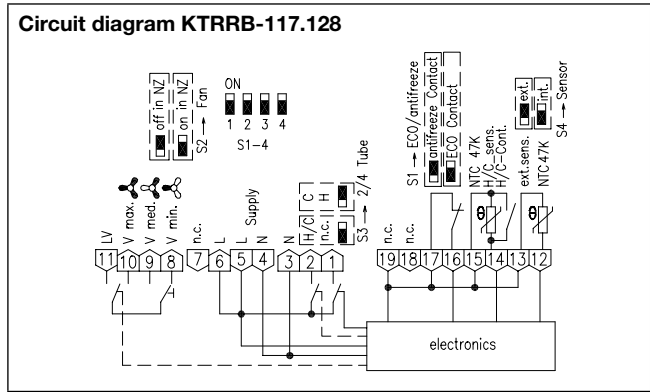

Air conditioning technology

Electronic climate controller for cooling ceilings, KTRRB

Surface-mounted installation – Design Berlin 2000 – with internal and external (optional) temperature sensor



Technical data

Design:	Berlin 2000
Surface finish:	matt
Housing colour:	pure white, like RAL 9010
Housing material:	ABS plastic
Ambient temperature:	0 ... 40 °C
Operating voltage:	24 VAC/50 Hz, 24 VDC
Storage temperature:	-20 ... +70 °C
Permissible atmospheric humidity:	max. 95% rel. humidity, non-condensing
Electrical connection:	screw-type terminals
Mounting/attachment:	Surface-/wall-mounting
Protection rating:	IP 30
Protection class:	III
Safety and EMC:	according to DIN EN 60730
Max. switching current:	1 A
Max. switching voltage:	24 VAC/50 Hz, 24 VDC
Min. switching voltage:	24 VAC/50 Hz, 24 VDC
Switching power:	24 W
Switching element:	relay
Switching contact:	NO contact
Output signal:	Switching, 24 VAC/50 Hz, 24 VDC
Sensor:	NTC internal, optional external, "Sensor 2"
Hysteresis:	approx. 1 K
General features:	External dew point sensor connection; mechanical range limitation; external setting

Application

Temperature controller for cooling ceilings/walls and all kinds of hot water heaters in 2- and 4-pipe systems for hotels, offices and private homes. As the KTRRB features dew point monitoring, it is highly suited for controlling ceiling cooling systems.

The unit can control up to 5 valve actuators (24 V~ normally closed) per output. The types KTRRB-052.24x can be adapted to normally open actuators (24 V~, max. 5 pieces) with a jumper.


When using 0–10 V actuators: KTRVB-052.24x.

Type/image	Item no.	Features	Circuit diagram	PG
KTRRB-052.244	DA420600	<p>General features: ECO function; "heating/cooling/cooling interruption due to condensation/off" display; "sensor rupture, sensor short-circuit, frost protection" display; relative scale</p> <p>External flow sensor (H/C sensor): For automatic switching of the controller in heating or cooling mode depending on the inflow temperature ("Sensor 2"). Alternatively, this input can be used as an H/C changeover contact</p> <p>Eco contact: Upon closing the contact, the ECO function is actuated</p> <p>Forced switch-off contact: External switch-off function with frost protection function</p> <p>Control function: heating and/or cooling, cooling interruption upon condensation of the dew point sensor, frost protection function in the switched-off condition</p> <p>Control function: 13...29 °C</p> <p>Setting range: -8...+8 °C</p> <p>Neutral zone: Approx. 2 K</p> <p>Pipe system compatibility: 2-pipe and 4-pipe</p>	see page 122	I






Electronic climate controller for cooling ceilings, KTRRB

Surface-mounted installation – Design Berlin 2000

Type/image	Item no.	Features	Circuit diagram	PG
	DA420700	<p>General features: ECO function; “heating/cooling/cooling interruption due to condensation/off” display; “sensor rupture, sensor short-circuit, frost protection” display; “off with frost protection monitoring” operating mode; relative scale; “off/comfort/ECO” switch</p> <p>External flow sensor (H/C sensor): for automatic switching of the controller in heating or cooling mode depending on the inflow temperature (“Sensor 2”); alternatively, this input can be used as an H/C changeover contact</p> <p>Eco contact: upon closing the contact, the ECO function is actuated</p> <p>Forced switch-off contact: external switch-off function with frost protection function</p> <p>Control function: heating and/or cooling, cooling interruption upon condensation of the dew point sensor, frost protection function in the switched-off condition</p> <p>Control range: 13 ... 29 °C</p> <p>Setting range: –8 ... +8 °C</p> <p>Neutral zone: Approx. 2 K</p> <p>Pipe system compatibility: 2-pipe and 4-pipe</p> <p>Replacement for KTRRB-040.213</p>	see page 122	I




* An internal trimming potentiometer can be used to select whether control should be based on the internal (left stop) or external sensor (right stop). In the intermediate positions, if both sensors are used, a weighting is applied to the internal room sensor and the external radiation sensor. The weighting allows for compensation of different structural conditions such as large window areas or cardinal directions. For very slow controlled systems, it is recommended to assign a higher weighting to the radiation sensor than to the internal room sensor.

Accessories: suitable valve actuators ZBOOA-040.100 (see page 144), dew point sensor TPS 1/TPS 2/TPS 3 (see page 136), suitable external sensors (“Sensor 2”); see “Sensor Technology”.

Accessories	Item no.	Features	PG
	G8000299	<p>Mounting/Attachment: using clips on cooling ceiling capillary pipe</p> <p>Use: drywall cooling ceiling (plasterboard) with hung up capillary pipe mat, metal ceiling cooling ceiling with integrated capillary pipe system</p> <p>Sensor line extendable up to: 50 m with 2 x 0.5 mm²</p> <p>Box contents: sensor, 2 clips for cooling pad</p>	I
	G8000300	<p>Mounting/attachment: Using clips on cooling ceiling capillary pipe or cable ties on the pipe</p> <p>Use: pipe systems transporting cold water, plaster cooling ceiling with capillary tube system</p> <p>Sensor line extendable up to: 50 m with 2 x 0.5 mm²</p> <p>Box contents: sensor, 2 clips for cooling pad, 2 cable ties</p>	I
	SN120000	<p>Mounting/Attachment: attach to pipe by means of cable ties</p> <p>Use: Pipe systems transporting cold water</p> <p>Sensor line extendable up to: 50 m with 2 x 0.5 mm²</p> <p>Box contents: sensor, 2 cable ties</p>	I


Electronic climate controller for cooling ceilings, KTRRB

Surface-mounted installation – Design Berlin 2000

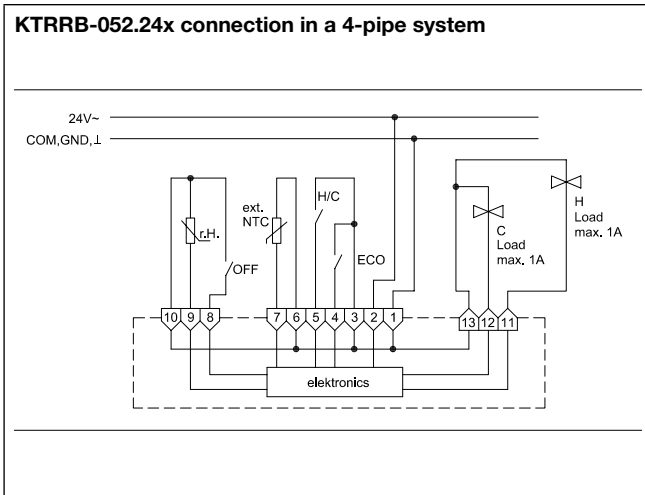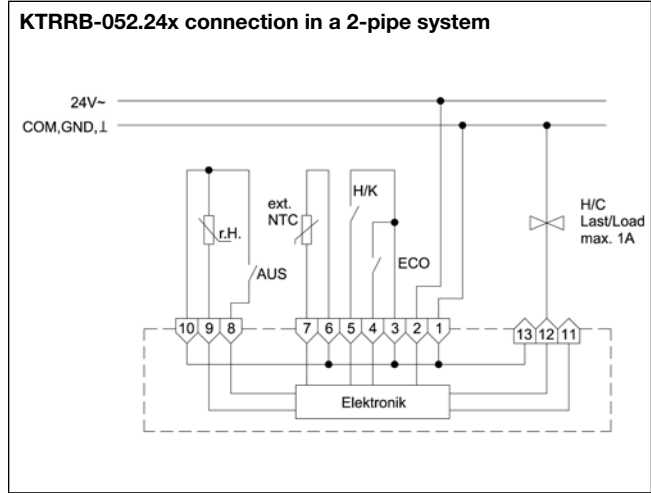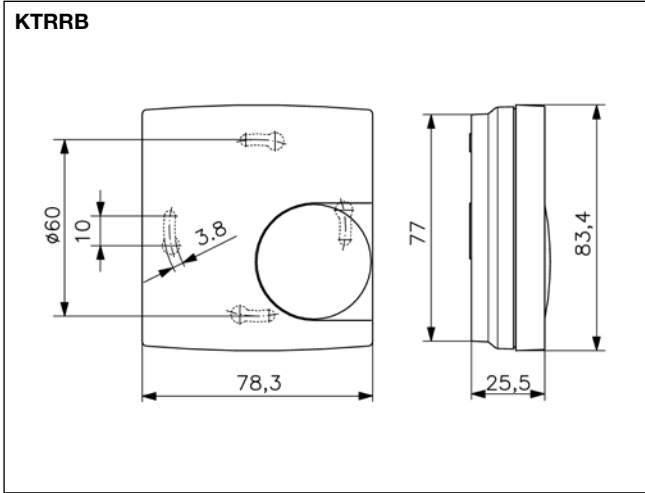

Important note:
 The inflow ducts of TPS-1 and TPS-2 are closed before shipping to avoid them becoming dirty during assembly. After assembly, they must be shortened with a knife until they are flush with the wall or ceiling to ensure air circulation. The air ducts should be arranged such that soiling during operation is avoided. It is important that the air surrounding the sensor has the same temperature as the room air to be cooled. If the humidity and temperature of the air to be cooled (ceiling cooling system) is different from that of the air surrounding the sensor, condensation may be detected prematurely or too late. As regards TPS-3, contact with the PCB paths must be avoided to prevent long-term corrosion.

Attention in case of sensor extension:
 Laying parallel to conductors carrying a mains voltage can result in faults. The use of shielded conductors reduces sensitivity to electro-magnetic fields.

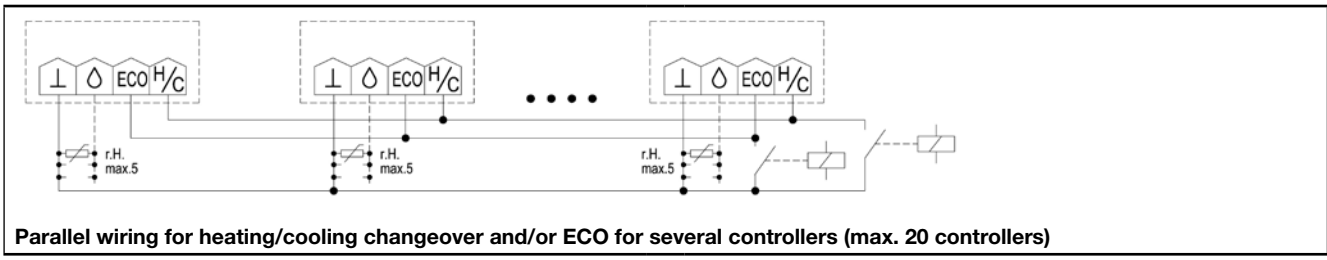

Electronic climate controller for cooling ceilings, KTRRU

– with internal and external (optional) temperature sensor – flush-mounted installation – Design Berlin UP



Technical data	Application
Design: Berlin UP (flush-mounted) Housing material: PC plastic Operating voltage: 24 VAC/50 Hz, 24 VDC Ambient temperature: 0 ... 40 °C Storage temperature: -20 ... +70 °C Permissible atmospheric humidity: max. 95% rel. humidity, non-condensing Electrical connection: screw-type terminals Protection rating: IP 30 Protection class: III Safety and EMC: according to DIN EN 60730 Average power consumption: approx. 0.6 W (1 VA) Max. switching current: 1 A Max. switching voltage: 24 VAC/50 Hz, 24 VDC Min. switching voltage: 24 VAC/50 Hz, 24 VDC Switching power: 24 W Switching element: relay Switching contact: NO contact Output signal: switching, 24 VAC/50 Hz, 24 VDC Sensor: NTC internal, optional external "Sensor 2" ECO contact: when the contact is closed, the ECO function is actuated (+/- 3 K) Control function: heating and /or cooling, cooling interruption upon condensation of the dew point sensor, frost protection function in the switched-off condition Control range: 13 ... 29 °C Setting range: -8 ... +8 °C Hysteresis: approx. 1 K Neutral zone: approx. 2 K General features: single-room climate controller; optional external dew point sensor; ECO function; "heating/cooling/cooling interruption due to condensation/off" display; mechanical range restriction; relative scale; external setting Pipe system compatibility: 2-pipe and 4-pipe	<p>For heating/cooling control of 2- and 4-pipe systems used in hotels, homes and offices.</p> <p>The unit can control up to 5 valve actuators (24 V~ normally closed) per output. The controllers are configured for 2-pipe or 4-pipe operation by means of a jumper. In 2-pipe operation, the controller is operated with a common heating/cooling output, whose mode of operation action can be toggled by means of an external contact (changeover contact). Connection of TPS dew point sensors is possible (max. 5 of them in parallel). Condensate formation at the TPS can result in the cooling valve getting closed.</p> <p>It is possible to actuate the energy saving (ECO) function via an external contact.</p> <p>In the "off" switch position, the room frost protection function is activated (when the temperature drops below 5 °C, all valves are forced open).</p> <p>External flow sensor (H/C sensor): for automatic switching of the controller to heating or cooling mode depending on the inflow temperature ("Sensor 2"); alternatively, this input can be used as an H/C changeover contact.</p>


Type/image	Item no.	Features	PG
	UA210401	General features: "Off with frost protection monitoring" operating mode; "off/comfort/ECO" switch Surface finish: depending on the cover set selected Housing colour: depending on the cover set selected Mounting/attachment: In flush-mounted socket – adaptable with cover set 50 x 50 mm or 55 x 55 mm in almost all surface switch ranges (deep flush-mounted socket recommended) Accessories: Cover sets are offered in several design variants (see "Overview", page 125) and are not included in the delivery scope. Matching set no.: JZ-007.xxx, e.g.: cover set 50 x 50 mm, pure white, glossy: JZ-007.000 cover set 55 x 55 mm, pure white, glossy: JZ-007.100 Scope of delivery: controller, protective cap If the functions of the "off/comfort/eco" switch are not required, JZ-008.xxx cover sets can be used instead (in switch position comfort).	I

* An internal trimming potentiometer can be used to select whether control should be based on the internal (left stop) or external sensor (right stop). In the intermediate positions, if both sensors are used, a weighting is applied to the internal room sensor and the external radiation sensor. The weighting allows for compensation of different structural conditions such as large window areas or cardinal directions. For very slow controlled systems, it is recommended to assign a higher weighting to the radiation sensor than to the internal room sensor.


Accessories: suitable valve actuators ZBOOA-040.100 (see page 144), dew point sensor TPS 1/TPS 2/TPS 3 (see page 136), suitable external sensors ("Sensor 2"); see "Sensor Technology".

Electronic climate controller for cooling ceilings, KTRRU



– with internal and external temperature sensor – flush-mounted installation – Design Berlin UP

Accessories	Item no.	Features	PG	
	JZ-090.900	VV000025	General features: alre frame "Berlin" (neutral) for all flush-mounted controllers with cover 50 x 50 mm Design: Berlin Surface finish: glossy Housing colour: pure white like RAL 9010 Housing material: PC plastic	I
	JZ-090.910	VV000010	General features: alre frame "Berlin" (neutral) for all flush-mounted controllers with cover 50 x 50 mm Design: Berlin Surface finish: glossy Housing colour: pearl white like RAL 1013 Housing material: PC plastic	I

Circuit diagram for KTRRU-052.245 in 2-pipe system

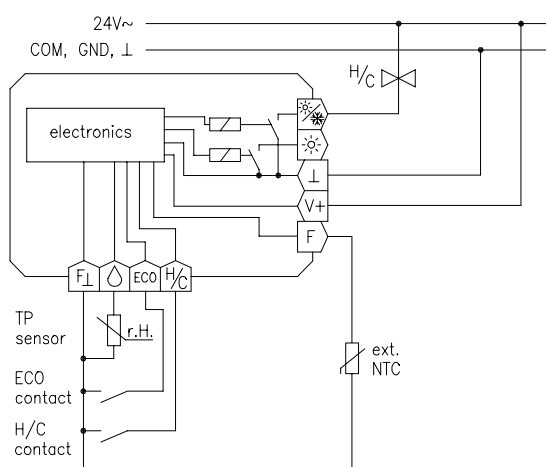

Circuit diagram for KTRRU-052.245 in 4-pipe system

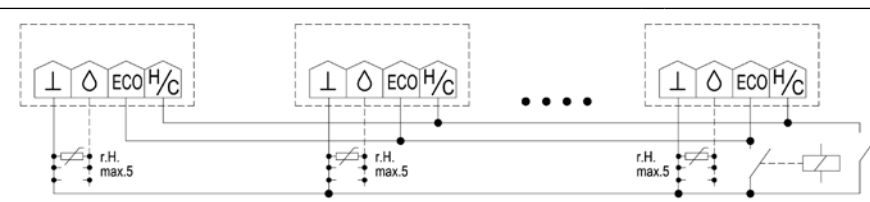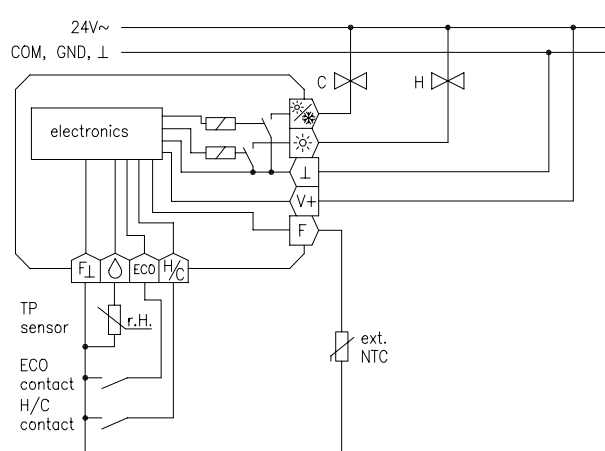


Parallel wiring for heating/cooling changeover and/or ECO for several controllers (max. 20 controllers)

alre flush-mounted range (cover sets)

all basic types and suitable cover sets **50 x 50 mm**

Basic type	Cover set 50 x 50 mm pure white (RAL 9010) glossy (JZ-xxx.000)		Cover set 50 x 50 mm pure white (RAL 9010) matt (JZ-xxx.001)		Cover set 50 x 50 mm pearl white (RAL 1013) glossy (JZ-xxx.010)		Cover set 50 x 50 mm traffic/studio white (RAL 9016) glossy (JZ-xxx.020)		PG
	Cover set	Item no.	Cover set	Item no.	Cover set	Item no.	Cover set	Item no.	
KTRRU-052.245#00	JZ-007.000	UN990022	JZ-007.001	UN990024	JZ-007.010	UN990026	JZ-007.020	UN990080	I
Cover sets for function without switch	JZ-008.000	UN990021	JZ-008.001	UN990023	JZ-008.010	UN990025	JZ-008.020	UN990079	I
FHY 101.060#00	JZ-021.000	UN990039	JZ-021.001	UN990044	JZ-021.010	UN990049	JZ-021.020	UN990081	I
Frames									
alre frame	JZ-090.900	VV000025			JZ-090.910	VV000010			I


In a flush-mounted socket, it can be adapted to fit virtually any rocker switch range.

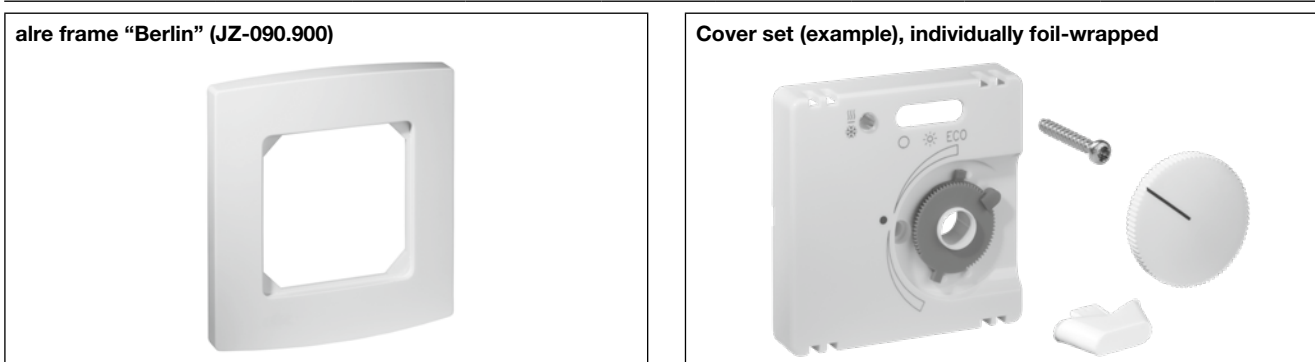

all basic types and suitable cover sets **55 x 55 mm**

Basic type	Cover set 55 x 55 mm pure white (RAL 9010) glossy (JZ-xxx.100)		Cover set 55 x 55 mm pure white (RAL 9010) matt (JZ-xxx.101)		Cover set 55 x 55 mm pearl white (RAL 1013) glossy (JZ-xxx.110)		Cover set 55x55 mm traffic/studio white (RAL 9016) glossy (JZ-xxx.120)		PG
	Cover set	Item no.	Cover set	Item no.	Cover set	Item no.	Cover set	Item no.	
KTRRU-052.245#00	JZ-007.100	UN990028	JZ-007.101	UN990030	JZ-007.110	UN990032	JZ-007.120	UN990095	I
Cover sets for function without switch	JZ-008.100	UN990027	JZ-008.101	UN990029	JZ-008.110	UN990031	JZ-008.120	UN990094	I
FHY 101.060#00	JZ-021.100	UN990054	JZ-021.101	UN990059	JZ-021.110	UN990064	JZ-021.120	UN990096	I

Can be adapted to fit many surface switch ranges in flush-mounted sockets, (for a current overview of the suitable frames and insert frames, see page 126).

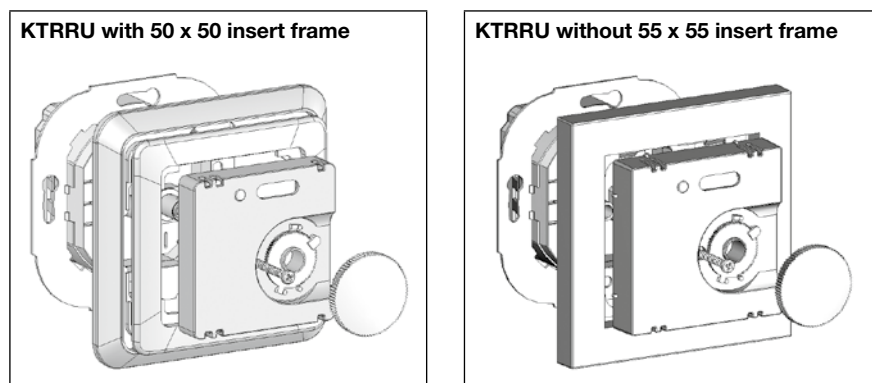

Adaptation of alre flush-mounted controllers

Manufacturer	Range	Colour RAL 9010 (surface finish)	Adaptation possible using "55 x 55" cover set (without insert frame)	Only adaptation with "50 x 50" cover set requires an insert frame from the manufacturer
BERKER	S.1	polar white (matt)	✓	1109 19 19
BERKER	S.1	polar white (glossy)	✓	1109 90 89
BERKER	Arsys	polar white (glossy)		1108 01 69
BERKER	B.3	aluminium/polar white (matt)	✓	1109 19 19
BERKER	B.3	aluminium/polar white (glossy)	✓	1109 90 89
BERKER	B.7	glass/polar white (matt)	✓	1109 19 19
BERKER	B.7	glass/polar white (glossy)	✓	1109 90 89
BERKER	Q.1/Q.3	polar white (velvet)		1109 60 79
BERKER	K.1	polar white (glossy)		1108 71 09
BUSCH-JAEGER	Reflex SI/SI Linear	alpine white (glossy)		1746-214-101
BUSCH-JAEGER	Busch-balance SI	alpine white (glossy)	✓	1746-914-101
BUSCH-JAEGER	impuls	alpine white (glossy)		1746/10-74
BUSCH-JAEGER	solo/future/axcent etc.	studio white – see RAL 9016 below		
ELSO	Joy	pure white (glossy)	✓	3630 84
ELSO	Fashion/Riva/Scala	pure white (glossy)		2030 84
GIRA	rocker switch	pure white (glossy)		0282 112
GIRA (System 55)	Standard/E 2	pure white (semi-gloss)	✓	0282 27
GIRA (System 55)	Standard/E2/E3	pure white (glossy)	✓	0282 03
GIRA (System 55)	E 22	pure white (glossy)	✓	0282 03
GIRA (System 55)	Event	pure white (semi-gloss) + opaque...	✓	0282 27
GIRA (System 55)	Event	pure white (glossy) + opaque...	✓	0282 03
GIRA (System 55)	Esprit	pure white (semi-gloss) + glass, aluminium...	✓	0282 27
GIRA (System 55)	Esprit	pure white (glossy) + glass, aluminium...	✓	0282 03
GIRA	S-Color	pure white (high-gloss)		0282 40
JUNG	CD 500/CD plus	alpine white (glossy)		CD 590 Z WW
JUNG	A 500/A 550/AS 500/A plus/A flow	alpine white (glossy)	✓	A 590 Z WW
JUNG	LS 990	alpine white (glossy)		LS 961 Z WW
JUNG	LS plus	alpine white (glass)		LS 961 Z WW
JUNG	A creation	alpine white (glossy)	✓	A 590 Z WW
JUNG	LS Design	alpine white (glossy)		LS 961 Z WW
MERTEN (System M)	M-Smart, M-Plan, M-Pure	polar white (matt)	✓	5181 19
MERTEN (System M)	M-Smart, M-Plan, M-Pure	polar white (glossy)	✓	5185 19
MERTEN (System Basis)	1-M/Atelier-M	polar white (glossy)	✓	5185 19
MERTEN (System Design)	Artec/Antik	polar white (glossy)		5160 99
MERTEN	1-M/M-Smart/M-Plan/M-Pure/D-Life	active white – see RAL 9016 below		
PEHA	Standard	pure white (glossy)		80.670.02 ZV
PEHA	Dialog	pure white (glossy)		95.670.02 ZV
PEHA	Aura	pure white (matt)/glass		20.670.02 ZV
PEHA	Badora	pure white (glossy)		11.670.02 ZV

Manufacturer	Range	Colour RAL 9016 (surface finish)	Adaptation possible using "55 x 55" cover set (without insert frame)	Only adaptation with "50 x 50" cover set requires an insert frame from the manufacturer
BUSCH-JAEGER	solo/future/future linear	studio white (RAL 9016, glossy)		1746/10-84
BUSCH-JAEGER	future linear	studio white (RAL 9016 matt)		1746/10-884
BUSCH-JAEGER	impuls	studio white (RAL 9016 matt)		1746/10-774
BUSCH-JAEGER	axcent	studio white (RAL 9016, glossy)		1746/10-84
BUSCH-JAEGER	carat (glass, bronze, gold)	studio white (RAL 9016)		1746/10-84
BUSCH-JAEGER	alpha (nea/exclusive*)	studio white (RAL 9016, glossy)		1746/10-24G
BUSCH-JAEGER	alpha (nea/exclusive*)	studio white (RAL 9016 matt)		1746/10-24
MERTEN	M-Smart, M-Plan, M-Pure	active white (RAL 9016, glossy)	✓	5185 25
MERTEN	1-M/Atelier-M	active white (RAL 9016, glossy)	✓	5185 25
MERTEN	D-Life	lotus white (RAL 9016)		MEG4500-6035
PEHA	Standard	arctic		D 80.670 ZV AW

*) During assembly, you need to remove four plastic tabs located at the rear of the frame

NOTE: Most light switches are designed in the colour "like RAL 9010", although different switch manufacturers use different designations for this colour. Coloured, glass and aluminium frames are also combined with white jacks or plugs so that controllers with white covers can also be integrated into these frames. Check the precise application in each individual case. The frames have different surface qualities (matt/glossy). For design reasons, the cover of the controller should have the same quality as the frame. We accept no liability for slight variations in colour and surface finish or for accuracy of fit. When installing devices into multi frames, always assemble the temperature controllers at the lowermost position.

"50 x 50 controller": The housing covers of the 50 x 50 controllers are 50 x 50 mm in size. Using a 50 x 50-mm insert frame, the 50 x 50 controllers can be integrated into nearly all light switch ranges in accordance with DIN 49075. The 50 x 50-mm insert frames must be ordered from the light switch manufacturer or from a wholesaler. The order number of the insert frame corresponding to the switch range in question can be found in the column "Only for adaptation with 50 x 50 cover set".

"55 x 55 controller": The housing covers of the 55 x 55 controllers are 55 x 55 mm in size. Many light switch ranges have inner dimensions of 55 x 55 mm. Therefore, the 55 x 55 controllers can be installed directly in the light switch frame without the use of an insert frame. See the column "Adaptation with 55 x 55 cover set" to determine whether the 55 x 55 controller fits in the given light switch range (✓).

All information regarding switch manufacturers' product lines and item numbers was last updated in 12/2019 | No liability is assumed for the information provided. |

Technical specifications subject to change.

An adaptation list for RAL 1013 switch ranges is available from our website at www.alre.de.

Electronic climate controller with timer KTRRUu – 230 VAC

Flush-mounted installation – Design Berlin UP



Technical data	Application
<p>Design: Berlin UP (flush-mounted)</p> <p>Housing material: PC, PMMA, ABS plastic</p> <p>Ambient temperature: 0... 40 °C</p> <p>Storage temperature: -20... +70 °C</p> <p>Permissible atmospheric humidity: max. 95% rel. humidity, non-condensing</p> <p>Protection rating: IP 30</p> <p>Safety and EMC: according to DIN EN 60730</p> <p>Max. power consumption: approx. 1 W (2.2 VA)</p> <p>Max. switching current: 3 (0.5) A each</p> <p>Switching element: 2 relays</p> <p>Switching contact: 2 NO contacts</p> <p>Output signal: Switching, analogue 0... 10 V max. 5 mA for activating an rpm-controlled fan</p> <p>Sensor: NTC internal, optional external "Sensor 2"</p> <p>External flow sensor (H/C sensor): For automatic switching of the controller to heating or cooling mode depending on the inflow temperature ("Sensor 2"); alternatively, this input can be used as an H/C changeover contact</p> <p>ECO contact: upon closing the contact, the ECO function is actuated</p> <p>Control range: 5... 40 °C</p> <p>Setting range: Standard setting range for heating (5... 30 °C), second setting range for cooling (18... 40 °C)</p> <p>Hysteresis: approx. 1 K</p> <p>Neutral zone: adjustable</p> <p>Display type: illuminated graphical display</p> <p>Pipe system compatibility: 2-pipe and 4-pipe</p>	<p>Flush-mounted controller with timer function for heating/cooling regulation of 2- and 4-pipe systems used in hotels, homes and offices. The adaptation takes place in a menu.</p> <p>The unit can control up to 5 valve actuators (normally open or normally closed) per output. In 2-pipe operation, the operating mode can be changed via an external contact (changeover) or a temperature sensor. The clock can serve as a master for other controllers for switching to ECO mode.</p> <p>It is possible to activate the energy saving (ECO) or frost protection (OFF) functions via an external contact. Alternatively, the controller's inputs can be configured to connect with an external temperature sensor or dew point sensor (TPS).</p> <p>A 0... 10 V interface can be used to control the speed of a fan (EC fan).</p> <p>General features: Digital rocker switch single-room climate controller with timer; optional external dew point sensor; ECO function, ECO value adjustable; "ECO" display; "on/off" display; "heating" display; "cooling" display; "cooling interruption due to condensation"; digital actual value display; backlighting; operating mode "off with frost protection monitoring"; child-safe features; facilities; power-reserve (3 days); actual value correction/measured value correction; learning function; emergency operating mode; holiday setting; party setting; automatic adjustment to summer/winter time; external setting; comfortable operation using touch-sensitive buttons with dynamic button assignment.</p> <p>Special colours are available for projects on request.</p>

Air conditioning technology

Type/image	Item no.	Features	Circuit diagram	PG
<p>KTRRUu 217.456#21 (230 VAC)</p>	UA220000	<p>Surface finish: glossy</p> <p>Housing colour: pure white like RAL 9010</p> <p>Operating voltage: 230 VAC, 50 Hz</p> <p>Electrical connection: pluggable screw-type terminals, voltage supply side 0.75–2.5 mm², low-voltage side 0.08–1.5 mm²</p> <p>Mounting/Attachment: in flush-mounted socket – adaptable with cover 50 x 50 mm in almost all rocker switch ranges (deep flush-mounted socket recommended)</p> <p>Protection class: II</p> <p>Max. switching voltage: 230 VAC, 50 Hz</p> <p>Min. switching voltage: 230 VAC, 50 Hz</p> <p>Switching power: 690 W</p> <p>Output signal: switching heating, cooling, heating/cooling, ECO, OFF, 230 VAC, 50 Hz; analogue 0... 10 V (5 mA) for activating an rpm-controlled fan</p> <p>Scope of delivery: controller, cover 50 x 50 mm, pure white (like RAL 9010), glossy, alre frame "Berlin"</p>		I

* A menu setting can be used to select whether control should be based on the internal or external sensor. In the intermediate positions, if both sensors are used, a weighting is applied to the internal room sensor and the external radiation sensor. The weighting allows for compensation of different structural conditions such as large window areas or cardinal directions. For very slow controlled systems, it is recommended to assign a higher weighting to the radiation sensor than to the internal room sensor.

Electronic climate controller with timer KTRRUu – 230 VAC

Flush-mounted installation – Design Berlin UP

Type/image	Item no.	Features	Circuit diagram	PG
KTRRUu 217.456#07 (230 VAC) 	UA220002	like KTRRUu 217.456#21 but scope of delivery as follows: Controller, cover 50 x 50 mm pure white (like RAL 9010), glossy , without frame		
KTRRUu 217.456#09 (230 VAC) 	UA220003	Like KTRRUu 217.456#21 but scope of delivery as follows: controller, cover 50 x 50 mm, pearl white (like RAL 1013), glossy , without frame		
KTRRUu 217.456#27 (230 VAC) 	UA220004	like KTRRUu 217.456#21 but scope of delivery as follows: Controller, cover 50 x 50 mm traffic/studio white (like RAL 9016), glossy , without frame		
KTRRUu 217.456#28 (230 VAC) 	UA220007	like KTRRUu 217.456 but scope of delivery as follows: Controller, cover for use with BUSCH-JAEGER Reflex SI/SI Linear pure white (like RAL 9010), glossy , without frame		
KTRRUu 217.456#55 (230 VAC) 	UA220005	like KTRRUu 217.456#21 but scope of delivery as follows: Controller, cover 55 x 55 mm pure white (like RAL 9010), glossy , without frame		
KTRRUu 217.456#56 (230 VAC) 	UA220009	like KTRRUu 217.456#21 but scope of delivery as follows: Controller, cover 55 x 55 mm pure white (like RAL 9010), matt without frame		
KTRRUu 217.456#57 (230 VAC) 	UA220006	like KTRRUu 217.456#21 but scope of delivery as follows: Controller, cover 55 x 55 mm pearl white (like RAL 1013), glossy , without frame		
KTRRUu 217.456#59 (230 VAC) 	UA220008	like KTRRUu 217.456#21 but scope of delivery as follows: Controller, cover 55 x 55 mm traffic/studio white (like RAL 9016), glossy , without frame		

Electronic climate controller with timer KTRRUu – 24 VAC/VDC



Flush-mounted installation – Design Berlin UP

Type/image	Item no.	Features	Circuit diagram	PG
	UA220100	like KTRRUu 217.456#21 but with: Operating voltage: 24 VAC/50 Hz, 24 VDC Protection class: III Max. switching voltage: 24 VAC/50 Hz, 24 VDC Min. switching voltage: 24 VAC/50 Hz, 24 VDC Switching power: 72 W Output signal: switching heating/cooling heating/cooling, ECO, OFF, 24 VAC/50 Hz, 24 VDC; analogue 0-10 V (5 mA) for controlling an rpm-controlled fan		
	UA220103	like KTRRUu 257.456#21 but scope of delivery as follows: Controller, cover 50 x 50 mm pure white (like RAL 9010), glossy , without frame		
	UA220104	like KTRRUu 257.456#21 but scope of delivery as follows: Controller, cover 50 x 50 mm pearl white (like RAL 1013), glossy , without frame		
	UA220105	like KTRRUu 257.456#21 but scope of delivery as follows: Controller, cover 50 x 50 mm traffic/studio white (like RAL 9016), glossy , without frame		
	UA220108	like KTRRUu 257.456#21 but scope of delivery as follows: Controller, cover for use with BUSCH-JAEGER Reflex SI/SI Linear pure white (like RAL 9010), glossy , without frame		
	UA220106	like KTRRUu 257.456#21 but scope of delivery as follows: Controller, cover 55 x 55 mm pure white (like RAL 9010), glossy , without frame		
	UA220110	like KTRRUu 257.456#21 but scope of delivery as follows: controller, cover 55 x 55 mm, pure white (like RAL 9010), matt , without frame		
	UA220107	like KTRRUu 257.456#21 but scope of delivery as follows: Controller, cover 55 x 55 mm pearl white (like RAL 1013), glossy , without frame		
	UA220109	like KTRRUu 257.456#21 but scope of delivery as follows: Controller, cover 55 x 55 mm traffic/studio white (like RAL 9016), glossy , without frame		


Accessories: suitable valve actuators ZBOOA, dew point sensor TPS 1/TPS 2/TPS 3, single frame JZ-090.900 (pure white, glossy)/JZ-090.910 (pearl white, glossy)

Electronic climate controller with timer KTRRUu


Flush-mounted installation – Design Berlin UP

Accessories	Item no.	Features	PG
	VV000025	Design: Berlin Surface finish: glossy Housing colour: pure white like RAL 9010 Housing material: PC plastic General features: alre frame “Berlin” (neutral) for all flush-mounted controllers with cover 50 x 50 mm	I
	VV000010	Design: Berlin Surface finish: glossy Housing colour: pearl white like RAL 1013 Housing material: PC plastic General features: alre frame “Berlin” (neutral) for all flush-mounted controllers with cover 50 x 50 mm	I


KTRRUu application example – 2-pipe system (230-V version)

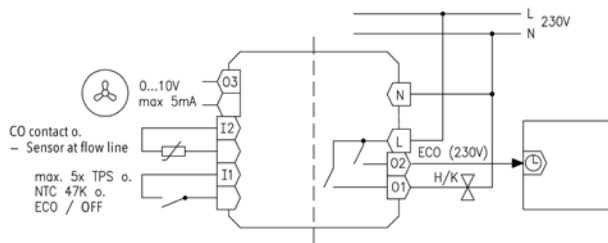


KTRRUu application example – 4-pipe system (230-V version)

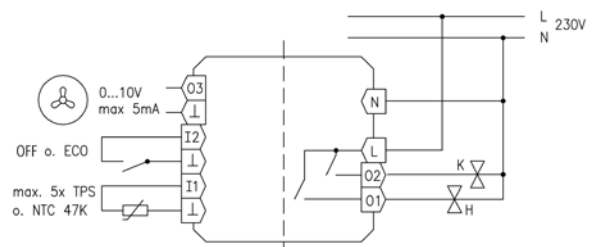

KTRRUu with alre frame “Berlin”


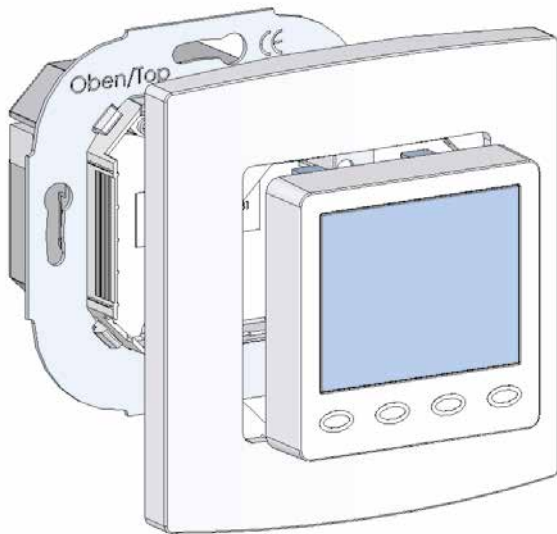


pluggable screw-type terminals

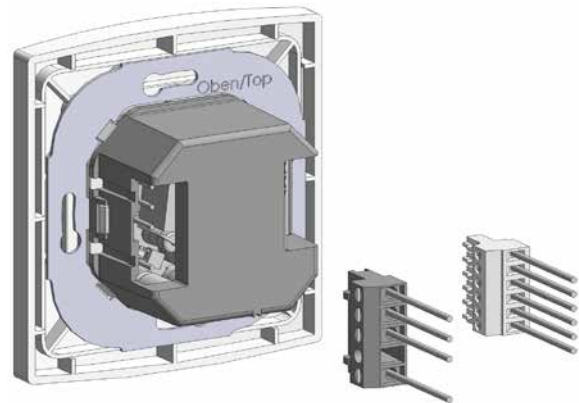

Electronic climate controller with timer KTRRUu

Flush-mounted installation – Design Berlin UP

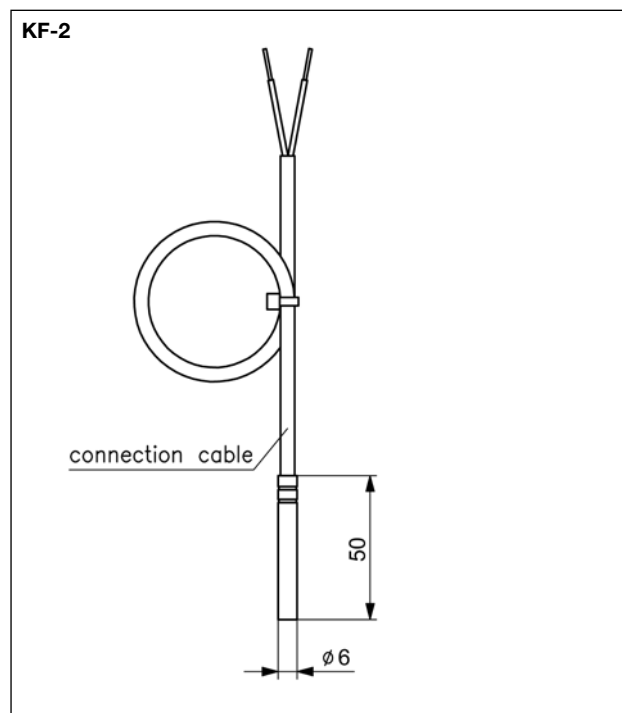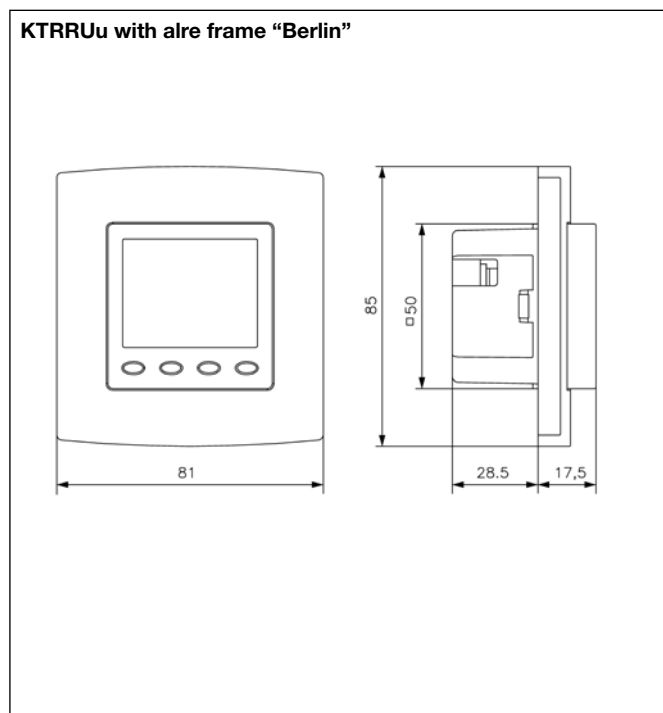

Other benefits:

- Pluggable screw-type terminals facilitate quick and easy assembly
- Illuminated, graphics-capable display
- Automatic adjustment to standard/daylight savings time
- Learning function
- Correction of measurement values
- Configurable display content
- Choice of various languages during installation: German, English, French, Dutch, Polish, Spanish, Czech, Russian
- Configurable inputs and outputs, for example:
 - OFF circuit with frost protection
 - ECO input
 - Dew point sensor input
 - Output: Heating/cooling/timer master
- Fan control 0–10 V
- Key lock
- Valve protection function
- Configurable control method (PI-PWM or 2-point control)
- Holiday and party function
- Power reserve
- "Heating operation" indication (LED orange)
- "Cooling operation" indication (LED blue)

Adaptation of alre flush-mounted controllers KTRRUu 2x7.456

Manufacturer	Range	Colour RAL 9010 (surface finish)	Adaptation in switch range "55 x 55" possible using ...	"50 x 50" adaptation possible with ... (insert frame from manufacturer required)
BERKER	S.1	polar white (matt)	KTRRUu 2x7.456#56	not required
BERKER	S.1	polar white (glossy)	KTRRUu 2x7.456#55	not required
BERKER	Arsys	polar white (glossy)		KTRRUu 2x7.456#07 + 1108 01 69
BERKER	B.3	aluminium/polar white (matt)	KTRRUu 2x7.456#56	not required
BERKER	B.3	aluminium/polar white (glossy)	KTRRUu 2x7.456#55	not required
BERKER	B.7	glass/polar white (matt)	KTRRUu 2x7.456#56	not required
BERKER	B.7	glass/polar white (glossy)	KTRRUu 2x7.456#55	not required
BERKER	K.1	polar white (glossy)		KTRRUu 2x7.456#07 + 1108 71 09
BUSCH-JAEGER	Reflex SI/SI Linear	alpine white (glossy)	KTRRUu 2x7.456#28	not required
BUSCH-JAEGER	Busch-balance SI	alpine white (glossy)	KTRRUu 2x7.456#55	not required
BUSCH-JAEGER	impuls	alpine white (glossy)		KTRRUu 2x7.456#07 + 1746/10-74
BUSCH-JAEGER	solo/future/axcent etc.	studio white – see RAL 9016 below		
ELSO	Joy	pure white (glossy)	KTRRUu 2x7.456#55	not required
ELSO	Fashion/Riva/Scala	pure white (glossy)		KTRRUu 2x7.456#07 + (203084)
GIRA	rocker switch	pure white (glossy)		KTRRUu 2x7.456#07 + 0282 112
GIRA (System 55)	Standard/E 2	pure white (semi-gloss)	KTRRUu 2x7.456#56	not required
GIRA (System 55)	Standard/E2/E3	pure white (glossy)	KTRRUu 2x7.456#55	not required
GIRA (System 55)	E 22	pure white (glossy)	KTRRUu 2x7.456#55	not required
GIRA (System 55)	Event	pure white (semi-gloss) + opaque...	KTRRUu 2x7.456#56	not required
GIRA (System 55)	Event	pure white (glossy) + opaque ...	KTRRUu 2x7.456#55	not required
GIRA (System 55)	Esprit	pure white (semi-gloss) + glass, aluminium ...	KTRRUu 2x7.456#56	not required
GIRA (System 55)	Esprit	pure white (glossy) + glass, aluminium ...	KTRRUu 2x7.456#55	not required
GIRA	S-Color	pure white (high-gloss)		KTRRUu 2x7.456#07 + 0282 40
JUNG	CD 500/CD plus	alpine white (glossy)		KTRRUu 2x7.456#07 + CD 590 Z WW
JUNG	A 500/A 550/AS 500/A plus/A flow	alpine white (glossy)	KTRRUu 2x7.456#55	not required
JUNG	LS 990	alpine white (glossy)		KTRRUu 2x7.456#07 + LS 961 Z WW
JUNG	LS plus	alpine white (glass)		KTRRUu 2x7.456#07 + LS 961 Z WW
JUNG	A creation	alpine white (glossy)	KTRRUu 2x7.456#55	not required
JUNG	LS Design	alpine white (glossy)		KTRRUu 2x7.456#07 + LS 961 Z WW
MERTEN (System M)	M-Smart, M-Plan, M-Pure	polar white (matt)	KTRRUu 2x7.456#56	not required
MERTEN (System M)	M-Smart, M-Plan, M-Creativ, M-Pure	polar white (glossy)	KTRRUu 2x7.456#55	not required
MERTEN (System Basis)	1-M/Atelier-M	polar white (glossy)	KTRRUu 2x7.456#55	not required
MERTEN (System Design)	Artec/Antik	polar white (glossy)		KTRRUu 2x7.456#07 + 5160 99
MERTEN	1-M/M-Smart/M-Plan/M-Pure/D-Life	active white – see RAL 9016 below		
PEHA	Standard	pure white (glossy)		KTRRUu 2x7.456#07 + 80.670.02 ZV
PEHA	Dialog	pure white (glossy)		KTRRUu 2x7.456#07 + 95.670.02 ZV
PEHA	Aura	pure white (matt)/glass		KTRRUu 2x7.456#07 + 20.670.02 ZV
PEHA	Badora	pure white (glossy)		KTRRUu 2x7.456#07 + 11.670.02 ZV

Manufacturer	Range	Colour RAL 9016 (surface finish)	Adaptation in switch range "55 x 55" possible using...	To adapt KTRRUu in size "50 x 50", an insert frame from the manufacturer is required
BUSCH-JAEGER	solo/future/future linear	studio white (RAL 9016, glossy)		KTRRUu 2x7.456#27 + 1746/10-84
BUSCH-JAEGER	axcent	studio white (RAL 9016, glossy)		KTRRUu 2x7.456#27 + 1746/10-84
BUSCH-JAEGER	carat (glass, bronze, gold)	studio white (RAL 9016)		KTRRUu 2x7.456#27 + 1746/10-84
BUSCH-JAEGER	alpha (nea/exclusive*)	studio white (RAL 9016, glossy)		KTRRUu 2x7.456#27 + 1746/10-24G
MERTEN	M-Smart, M-Plan, M-Pure	active white (RAL 9016, glossy)	KTRRUu 2x7.456#59	not required
MERTEN	1-M/Atelier-M	active white (RAL 9016, glossy)	KTRRUu 2x7.456#59	not required
MERTEN	D-Life	lotus white (RAL 9016)		KTRRUu 2x7.456#27 + MEG4500-6035
PEHA	Standard	arctic		KTRRUu 2x7.456#27 + D 80.670 ZV AW

*) During assembly, you need to remove four plastic tabs located at the rear of the frame.

NOTE: Most light switch ranges are designed in a colour like RAL 9010, although different switch manufacturers use different designations for this colour. Coloured, glass and aluminium frames are also combined with white jacks or plugs so that controllers with white covers can also be integrated into these frames. Check the precise application in each individual case. The frames have different surface qualities (matt/glossy). For design reasons, the cover of the controller should have the same quality as the frame. We accept no liability for slight variations in colour and surface finish or for accuracy of fit. When installing devices into multi frames, always assemble the temperature controllers at the lowermost position.

"50 x 50 controller": The housing covers of the 50 x 50 controllers are 50 x 50 mm in size. Using a 50 x 50-mm insert frame, the 50 x 50 controllers can be integrated into nearly all light switch ranges in accordance with DIN 49075. The 50 x 50-mm insert frames must be ordered from the light switch manufacturer or from a wholesaler. The order number of the insert frame corresponding to the switch range in question can be found in the column "For adaptation of KTRRUu into size "50 x 50"".

"55 x 55 controller": The housing covers of the 55 x 55 controllers are 55 x 55 mm in size. Many light switch ranges have inner dimensions of 55 x 55 mm. Therefore, the 55 x 55 controllers can be installed directly in the light switch frame without the use of an insert frame. See the column "Adaptation in switch range (55 x 55)" to determine whether the 55 x 55 controller fits in the given light switch range (KTRRUu 2x7.456#xx).

All information regarding switch manufacturers' product lines and item numbers was last updated in 12/2019 | No liability is assumed for the information provided. | Technical specifications subject to change.

An adaptation list for RAL 1013 switch ranges is available from our website at www.alre.de.

Continuous electronic climate controller, KTRVB

Surface-mounted installation – Design Berlin 2000



Technical data

Design:	Berlin 2000
Surface finish:	matt
Housing colour:	pure white, like RAL 9010
Housing material:	ABS plastic
Storage temperature:	-20 ... +70 °C
Operating voltage:	24 VDC, 24 VAC, 50 Hz
Permissible atmospheric humidity:	max. 95% rel. humidity, non-condensing
Electrical connection:	screw-type terminals
Mounting/attachment:	Surface-/wall-mounting
Protection rating:	IP 30
Protection class:	III
Safety and EMC:	according to DIN EN 60730
Switching element:	electronic with analogue output signal
General features:	climate controller for individual room control with proportionally controlled valve; mechanical range restriction; external setting


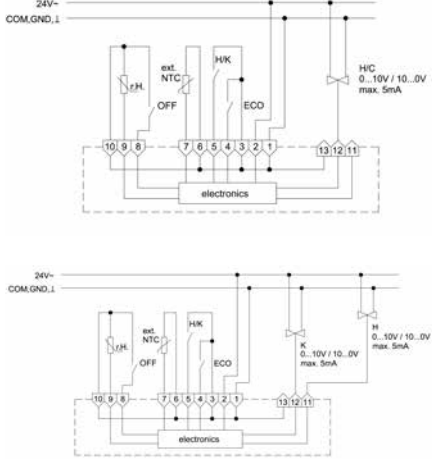

Application

Room temperature controller for continuous control of valve actuators. Controller for 2-pipe systems (1-duct), 4-pipe systems (2-duct) and mixing chambers.

Type/image	Item no.	Features	Circuit diagram	PG
	DA450000	<p>General features: scale: degrees Celsius</p> <p>Ambient temperature: 0 ... 50 °C</p> <p>Output signal: consistently 0 ... 10 V or 10 ... 0 V (can be switched using a jumper), max. 5 mA</p> <p>Sensor: NTC internal</p> <p>Control function: Heating or cooling with adjustable p-band, aligned to 5 V at setpoint temperature</p> <p>Control range: 5 ... 30 °C</p> <p>Hysteresis: 0 K, since control is always via the p-band in the range from +0.5 K ... 3 K (adjustable)</p> <p>Pipe system compatibility: 2-pipe</p>		I
	DA450100	<p>General features: Relative scale</p> <p>Ambient temperature: 0 ... 50 °C</p> <p>Output signal: consistently 0 ... 10 V or +10 ... 0 V (can be switched using a jumper), max. 5 mA</p> <p>Sensor: NTC, internal</p> <p>Control function: Heating or cooling with adjustable p-band, aligned to 5 V at setpoint temperature</p> <p>Control range: 13 ... 29 °C</p> <p>Setting range: -3 ... +3 K (the pre-set "zero point" of approx. 21 °C can be adjusted in the machine by +/- 5 K)</p> <p>Hysteresis: 0 K, since control is always via the p-band in the range from +0.5 ... 3 K (adjustable)</p> <p>Pipe system compatibility: 2-pipe</p>		I

Continuous electronic climate controller, KTRVB

Surface-mounted installation – Design Berlin 2000

Type/image	Item no.	Features	Circuit diagram	PG
	DA451500	<p>General features: External dew point sensor; ECO function; “heating/cooling/cooling interruption due to condensation/off” display; “sensor rupture/sensor short-circuit/frost protection” display; operating mode “off with frost protection monitoring”; relative scale</p> <p>Ambient temperature: 0... 40 °C</p> <p>Output signal: consistently 0... 10 V or 10... 0 V (can be switched using a jumper), max. 5 mA</p> <p>Sensor: NTC internal, optional external “Sensor 2” (see “Sensors”)</p> <p>External flow sensor (H/C sensor): for automatic switching of the controller to heating or cooling mode depending on the inflow temperature; alternatively, this input can be used as a “Sensor 2” H/C changeover contact</p> <p>ECO contact: Upon closing the contact, the ECO function is actuated (in heating mode, the temperature is adjusted down by 3 K and in cooling mode it is adjusted up by 3 K)</p> <p>Forced switch-off contact: External switch-off function with frost protection monitoring</p> <p>Control function: heating and/or cooling with p-band 1 K, cooling interruption upon condensation of the dew point sensor, frost protection function in “off” state</p> <p>Control range: 13... 29 °C</p> <p>Setting range: 21 °C ± 8 K</p> <p>Hysteresis: 0 K, since control is always via the p-band in the range from 1 K</p> <p>Neutral zone: Approx. 2 K</p> <p>Pipe system compatibility: 2-pipe and 4-pipe</p>		I
	DA451600	<p>like KTRRB-052.244 but with “off/comfort/cooling” switch</p>		I

Electronic dew point monitor, WFRRN

Standard rail mounting



Technical data

Surface finish:	matt
Housing colour:	light grey, like RAL 7035
Housing material:	PC plastic
Ambient temperature:	0...55 °C
Storage temperature:	-20...+70 °C
Permissible atmospheric humidity:	max. 95% rel. humidity, non-condensing
Electrical connection:	screw-type terminals up to 2.5 mm ²
Mounting/attachment:	Standard rail mounting
Protection rating:	IP 20
Safety and EMC:	according to DIN EN 60730
Average power consumption:	approx. 1 VA
Min. switching current:	depending on the switching voltage (min. 0.3 W)
Min. switching voltage:	depending on the switching current (min. 0.3 W)
Switching element:	relay
Switching contact:	toggler, potential-free
Output signal:	switching
Control function:	dew point triggering
Hysteresis:	8 MΩ
Break point fixed:	approx. 98% relative humidity
General features:	"dew point triggering" display
Accessories:	dew point sensors (TPS)

Application

For interrupting cooling when the relative atmospheric humidity exceeds approx. 98%.

Dew point sensor method of operation: If the surface temperature of the dew point sensor is equivalent to the dew point, a microscopic film of moisture forms on its surface. This film changes the resistance value of the dew point sensor to such an extent that the connected controller or monitor detects this change and disables the cooling. In this manner, dripping condensate water at maximum cooling, and hence moisture damage to the building, are avoided. When the dew point sensor dries off again, the resistance value increases and cooling is re-enabled. To ensure that a pending undershooting of the dew point is detected in time, the dew point sensor should be assembled at the point where the dew point is most likely to be reached first along the cooling circuit. Generally, these locations are at the inlet coming into the room and/or near windows. If the place where the dew point is most likely to occur cannot be unambiguously determined, it is possible to connect up to 5 dew point sensors in parallel to one controller or monitor.

Type/image	Item no.	Features	Circuit diagram	PG
	D4780587	Operating voltage: 24 VDC, 24 VAC, 50 Hz Protection class: III Max. switching current: 10 (3) A at 48 VAC, 10 A at 30 VDC, 1 A at 60 VDC Max. switching voltage: 48 VAC, 50 Hz/60 VDC Switching power: 500 VA at 48 VAC, 300 W at 30 VDC, 60 W at 60 VDC		I
	D4780572	Operating voltage: 230 VAC, 50 Hz Protection class: II, if properly mounted Max. switching current: 10 (3) A at 230 VAC, 10 A at 30 VDC, 1 A at 60 VDC Max. switching voltage: 230 VAC, 50 Hz/60 VDC Switching power: 2300 VA at 230 VAC, 300 W at 30 VDC, 60 W at 60 VDC		I

Dew point sensor, TPS






Technical data


Storage temperature:	-20 ... +70 °C
Sensor wire extendable up to:	50 m with 2 x 0.5 mm ²
Connecting cable:	10 m
Accessories:	For use with dew point sensors (e.g. WFRRN) or climate controllers with dew point monitoring (KTRRB, KTRRU, KTRRUu, KTRVB, KTFRL, KTFRD)

Application

These dew point sensor were developed in conjunction with alre dew point monitors and cooling ceiling controllers for the specific purpose of detecting and signalling the dew point. In this way, they prevent dripping condensation water from reaching the cooling circuit parts, if installed correctly.

Type/image	Item no.	Features	PG
TPS 1 	G8000299	Mounting/Attachment: using clips on cooling ceiling capillary pipe Use: Drywall cooling ceiling (plasterboard) with hung up capillary pipe mat, metal cooling ceiling with integrated capillary pipe system Sensor wire extendable up to: 50 m with 2 x 0.5 mm ² Box contents: sensor, 2 clips for cooling pad	I
TPS 2 	G8000300	Mounting/attachment: Using clips on cooling ceiling capillary pipe or cable ties on the pipe Use: Pipe systems transporting cold water, plaster cooling ceiling with capillary tube system Sensor wire extendable up to: 50 m with 2 x 0.5 mm ² Box contents: sensor, 2 clips for cooling pad, 2 cable ties	I
TPS 3 	SN120000	Mounting/Attachment: attach to pipe by means of cable ties Use: Pipe systems transporting cold water Sensor wire extendable up to: 50 m with 2 x 0.5 mm ² Box contents: sensor, 2 cable ties	I







TPS 3

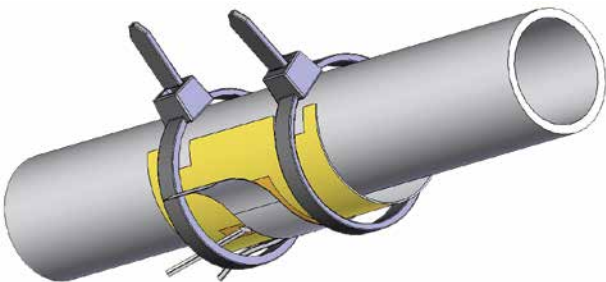

Important note: The inflow ducts of TPS-1 and TPS-2 are closed before shipping to avoid dirtying during assembly. After assembly, they must be shortened with a knife until they are flush with the wall or ceiling to ensure air circulation. The air ducts should be arranged such that soiling during operation is avoided. It is important that the air surrounding the sensor has the same temperature as the room air to be cooled. If the humidity and temperature of the air to be cooled (ceiling cooling system) is different from that of the air surrounding the sensor, condensation may be detected prematurely or too late. As regards TPS-3, contact with the PCB paths must be avoided to prevent long-term corrosion.

Attention in case of sensor extension: Parallel laying to conductors carrying a mains voltage can result in faults. The use of shielded conductors reduces sensitivity to electromagnetic fields.

Dew point sensor, TPS

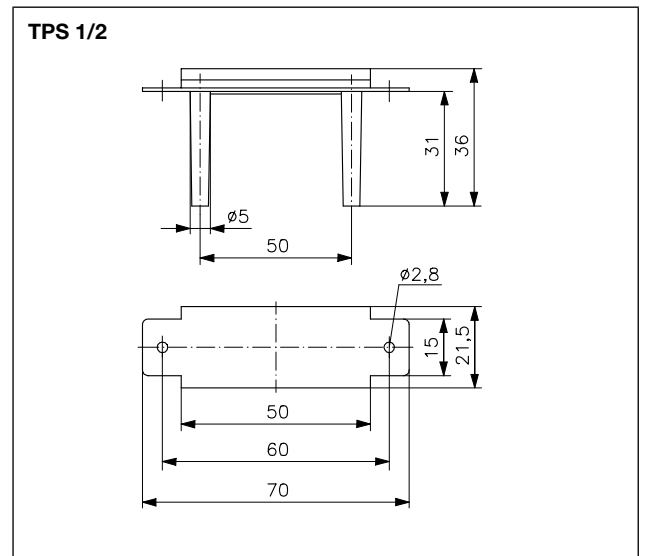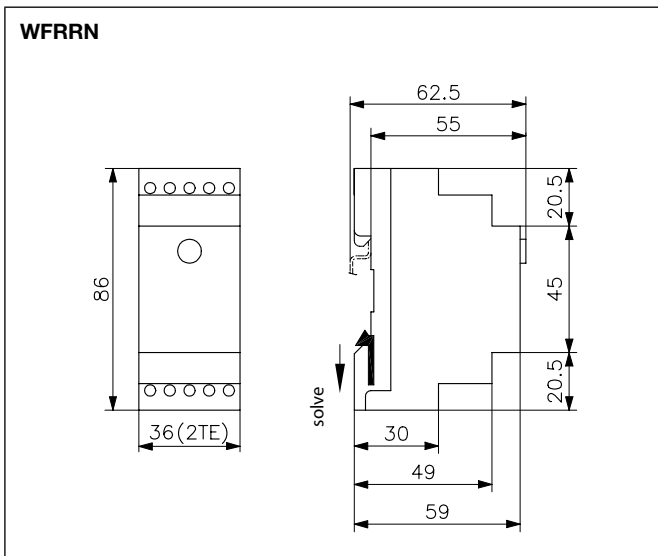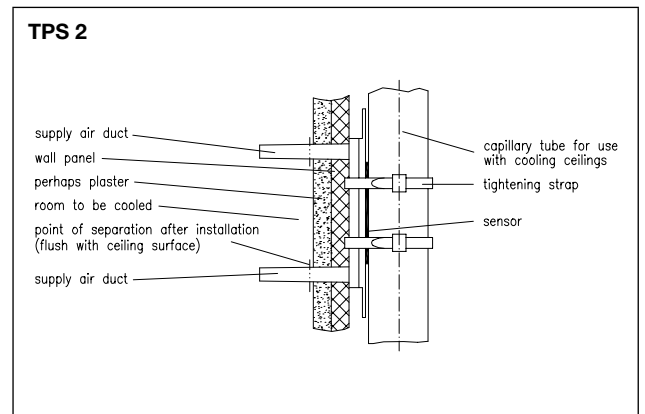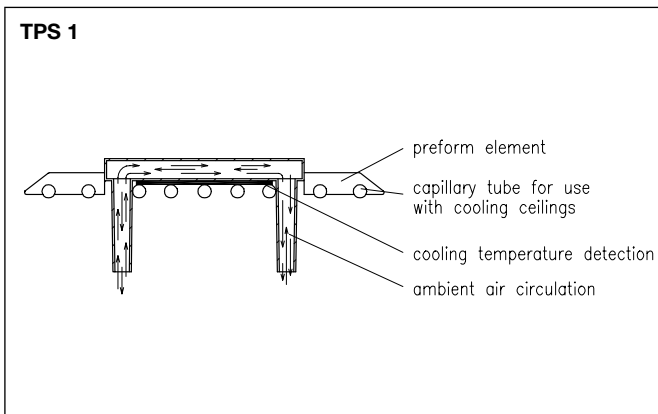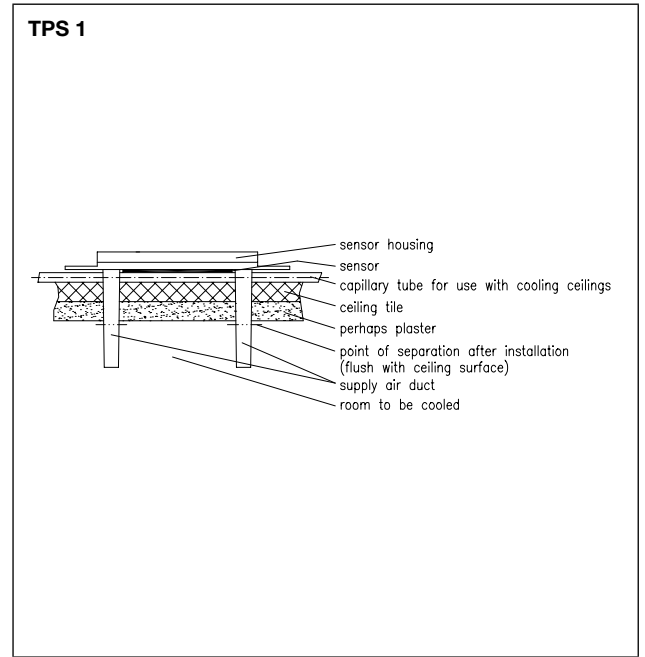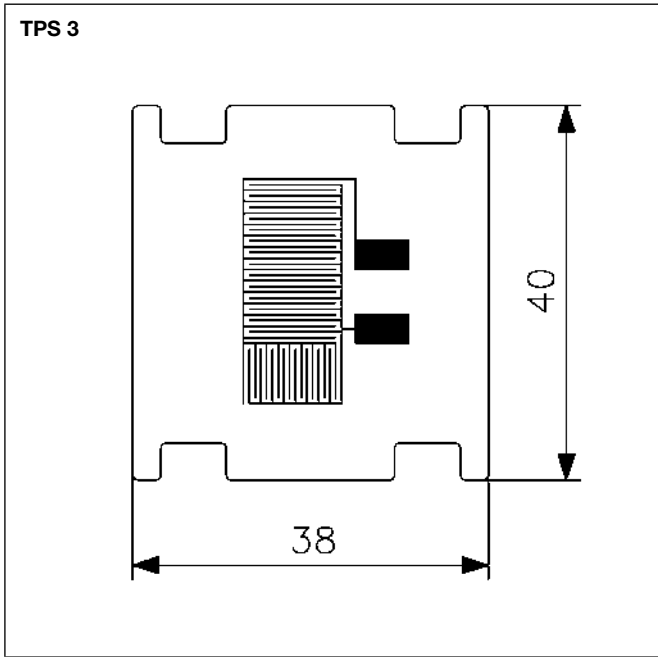

Mechanical room hygrostats/hygro-thermostats, RFSB, FHY, RKKDSB

Surface-mounted installation – Design Berlin 2000/3000/UP

Technical data

Storage temperature: -20 ... +60 °C
(RFSB-060.xxx -20 ... +70 °C)

Permissible atmospheric humidity: max. 95% rel. humidity, non-condensing

Electrical connection: screw-type terminals

Protection rating: IP 30

Protection class: II, if properly mounted

Safety and EMC: according to DIN EN 60730

Min. switching current: 100 mA

Max. switching voltage: 230 VAC, 50 Hz

Min. switching voltage: 24 VAC, 50 Hz

General features: mechanical range restriction

Other/similar items: For duct and control cabinet hygrostats, see "Plant Engineering" chapter

Application

Hygrostat: The room hygrostat is used to monitor and control the relative humidity, e.g., in offices, homes, winter gardens, baths, swimming pools and data centres. The action of the relative humidity on a measuring tape is made to actuate a potential-free changeover contact. The desired value is set by means of the adjusting knob on the front panel. The setting range can be limited.

Hygro-thermostat: Monitoring and control of the relative humidity and the temperature in one device.

Note: Observe the wet room distance according to DIN VDE 0100-701!



Type/image

Item no.

Features

Circuit diagram

PG

FHY 101.060#00

UA020004

General features: external setting; protective cap; contact hazard protection cover plate

Design: Berlin UP

Surface finish: according to selected cover set

Housing colour: according to selected cover set

Housing material: PC plastic

Operating voltage: no auxiliary energy necessary

Ambient temperature: 0 ... 50 °C

Mounting/Attachment: in flush-mounted socket – adaptable with cover set 50 x 50 mm or 55 x 55 mm in almost all rocker switch ranges (deep flush-mounted socket recommended)

Max. switching current: dehumidifying (terminal E) 5 (0.2) A, humidifying (terminal B) 2 (0.2) A

Switching power: terminal E: 1150 W, terminal B: 460 W

Switching element: microswitch

Switching contact: Changeover switch (toggler)

Output signal: Switching

Sensor: plastic fibres

Control function: humidifying or de-humidifying


Control range: 35 ... 85% rel. humidity

Hysteresis: Approx. 5% rel. humidity

Accessories: Cover sets are offered in various designs (see the separate overview on page 125) and are not included in the delivery.

Suitable set no.: JZ-021.xxx, e.g.:
cover set 50 x 50 mm, pure white, glossy: JZ-021.000
cover set 55 x 55 mm, pure white, glossy: JZ-021.100







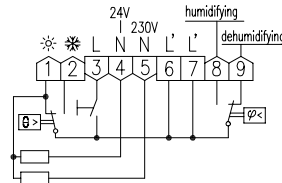
Scope of delivery: controller, protective cap



I


Mechanical room hygromats/hygro-thermostats, RFSB, FHY, RKKDSB







Surface-mounted installation – Design Berlin 2000/3000/UP

Type/image	Item no.	Features	Circuit diagram	PG
FHY 101.060#21 	UA020003	like FHY 101.060#21 but scope of delivery as follows: controller, alre frame "Berlin", cover 50 x 50 mm, pure white (like RAL 9010), glossy		
RFHSB-060.010 	MA020202	General features: External setting Design: Berlin 2000 Surface finish: matt Housing colour: pure white like RAL 9010 Housing material: ABS plastic Operating voltage: no auxiliary energy necessary Ambient temperature: 0 ... 60 °C Mounting/attachment: surface-/wall-mounting (4-hole assembly on flush-mounted socket) Max. switching current: Dehumidifying (terminal 4) 5 (0.2) A, humidifying (terminal 2) 2 (0.2) A Switching power: terminal 4: 1150 W, terminal 2: 460 W Switching element: microswitch Switching contact: Changeover switch (toggler) Output signal: Switching Sensor: plastic fibres Control function: humidifying or de-humidifying Control range: 35 ... 85% rel. humidity Hysteresis: Approx. 7% rel. humidity		
RFHSB-060.011 	MA020203	like RFHSB-060.010, but with internal setting		
RKDSB-171.000 	MA220000	General features: "on/off" switch; external setting Design: Berlin 3000 Surface finish: matt Housing colour: pure white like RAL 9010 Housing material: ABS plastic Operating voltage: 24 VAC or 230 VAC selectable Ambient temperature: 0 ... 50 °C Mounting/Attachment: surface/wall-mounting or by means of adapter plate on flush-mounted socket Max. switching current: dehumidifying (terminal 9) 5 (0.2) A, humidifying (terminal 8) 3 (0.2) A, heating (terminal 1) 10 (4) A at 230 VAC / 1 (1) A at 24 VAC, cooling (terminal 2) 5 (2) A at 230 VAC / 1 (1) A at 24 VAC Switching power: terminal 9: 1150 W, terminal 8: 690 W, terminal 1: 2300 W at 230 VAC / 24 W at 24 VAC, terminal 2: 1150 W at 230 VAC / 230 W at 24 VAC Switching element: microswitch (hygrostat)/bimetal (thermostat) Switching contact: 2x changeover switch (toggler) Output signal: Switching Sensor: plastic fibres for humidity, bimetal for temperature Control function: Humidifying or de-humidifying, heating or cooling Control ranges: Temperature 10 ... 35 °C, Humidity 30 ... 100% rel. humidity Setting range: 10 ... 35 °C Hysteresis: Approx. 4% rel. humidity, approx. 1 K at a temperature change of max. 4 K/h Accessories: adapter plate flush-mounted socket mounting: JZ-17		

Mechanical room hygromats/hygro-thermostats, RFSB, FHY, RKKDSB

Surface-mounted installation – Design Berlin 2000/3000/UP

Accessories	Item no.	Features	PG
JZ-17 	MN990001	<p>General features: Adapter plate for mounting devices on flush-mounted sockets (including fastening screws for mounting the controller on the adapter plate)</p> <p>Surface finish: matt</p> <p>Housing colour: pure white like RAL 9010</p> <p>Housing material: ABS plastic</p>	II

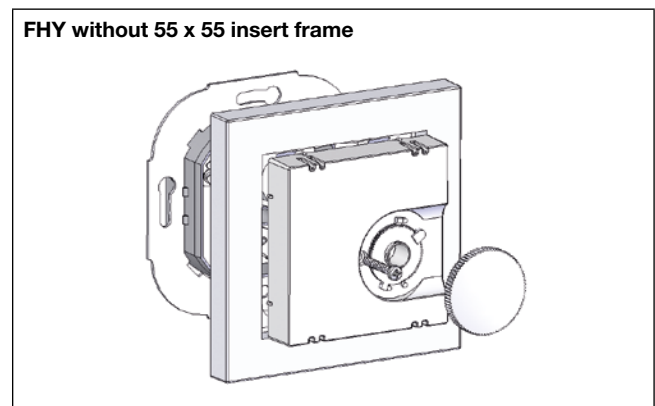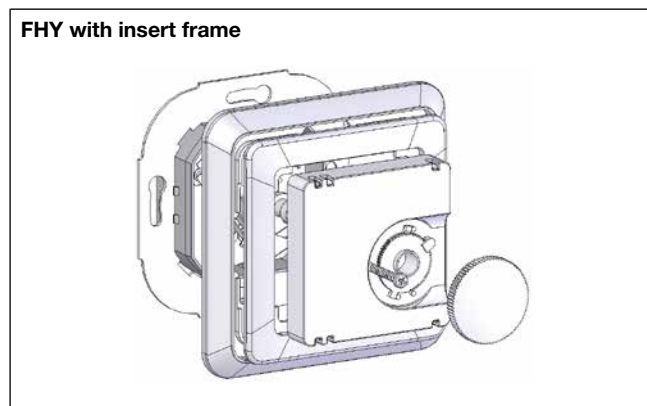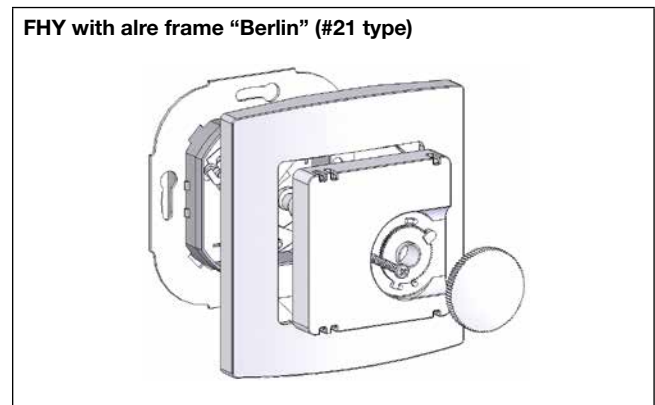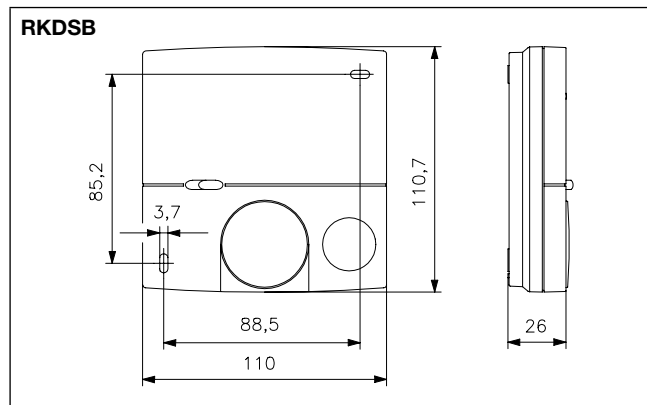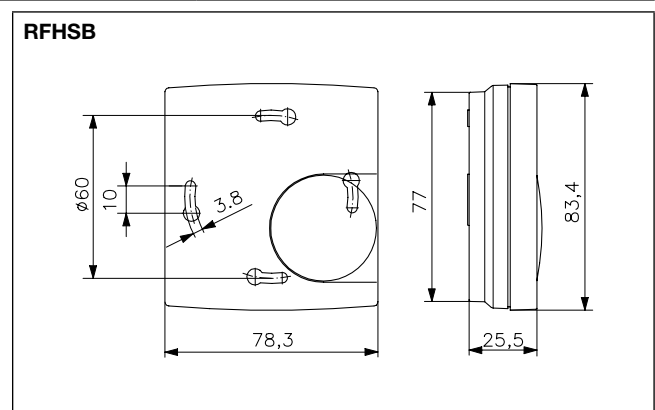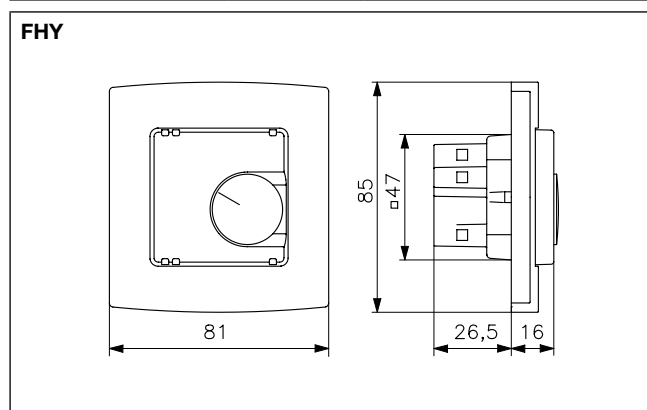

Terminal strip for heating / cooling manifold VOORL

for 5 or 8 room thermostats



Technical data

Surface finish:	matt
Housing colour:	light grey, like RAL 7035
Housing material:	ABS plastic
Operating voltage:	230 VAC, 50 Hz
Ambient temperature:	-10 ... +50 °C
Storage temperature:	-20 ... +70 °C
Permissible atmospheric humidity:	max. 95% rel. humidity, non-condensing
Electrical connection:	spring-cage terminals 0.2 mm ² to 1.5 mm ² ; if end sleeves are used, 0.25 mm ² to 0.75 mm ²
Mounting/attachment:	Surface-/wall-mounting
Protection rating:	IP 20
Protection class:	II, if properly mounted
Max. switching voltage:	230 VAC, 50 Hz
Min. switching voltage:	230 VAC, 50 Hz
Accessories:	suitable valve actuators: ZBOOA-010.100 optional magnetic fastening set for simple installation in heating manifold: JZ-24

Application


This device is specifically designed for fixed wiring of 230 VAC single-room temperature controllers and the associated valve actuators for fixed-location attachment. Switching between heating/cooling is performed via a central contact.

Type/image	Item no.	Features	PG
VOORL-215.008 	DA490100	General features: Terminal strip in housing for wiring up to 5 room thermostats and up to 20 actuators; up to 4 actuators per channel can be connected Max. switching current: output 1-5: 3 (1) A Total of all the outputs (5 channels): 3 (1) A Switching power: total of 920 W ECO contact: if clock regulators are used, up to 2 master-slave time zones can be defined; time zone 2 can be switched to ECO function via an external switching contact on terminal U Control function: Heating or cooling	I
VOORL-215.052 	DA490300	As for VOORL-215.008, but including pump module (max. 0.75 A)	I
VOORL-318.008 	DA490000	General features: Terminal strip in housing for wiring up to 8 room thermostats and up to 32 actuators; up to 4 actuators per channel can be connected Max. switching current: output 1-8: 3 (1) A Total of all the outputs (8 channels): 3 (1) A Switching power: Total of 1380 W ECO contact: if clock regulators are used, up to 3 master-slave time zones can be defined; time zone 3 can be switched to ECO function via an external switching contact on terminal U Control function: Heating or cooling	I
VOORL-318.052 	DA490200	As for VOORL-318.008, but including pump module (max. 0.75 A)	I
Accessories	Item no.	Features	PG
JZ-24 	BN990002	Magnetic fastening set for simple and safe fastening of the multi-channel receiver and VOORL terminal strips on a metallic substrate (for example, heating manifold)	II


Terminal strip for heating/cooling manifold VOORL

for 5 or 8 room thermostats


VOORL-215.xxx

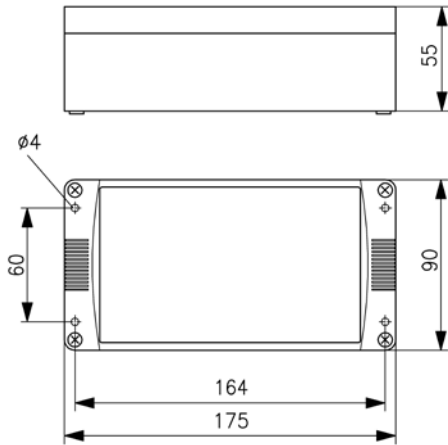

VOORL-318.xxx

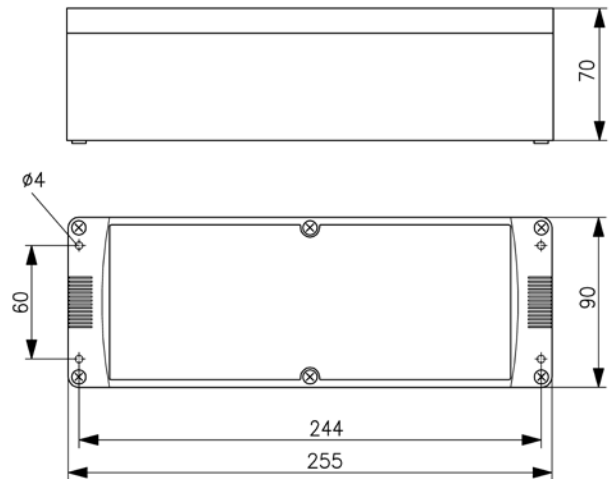

VOORL-318.xxx

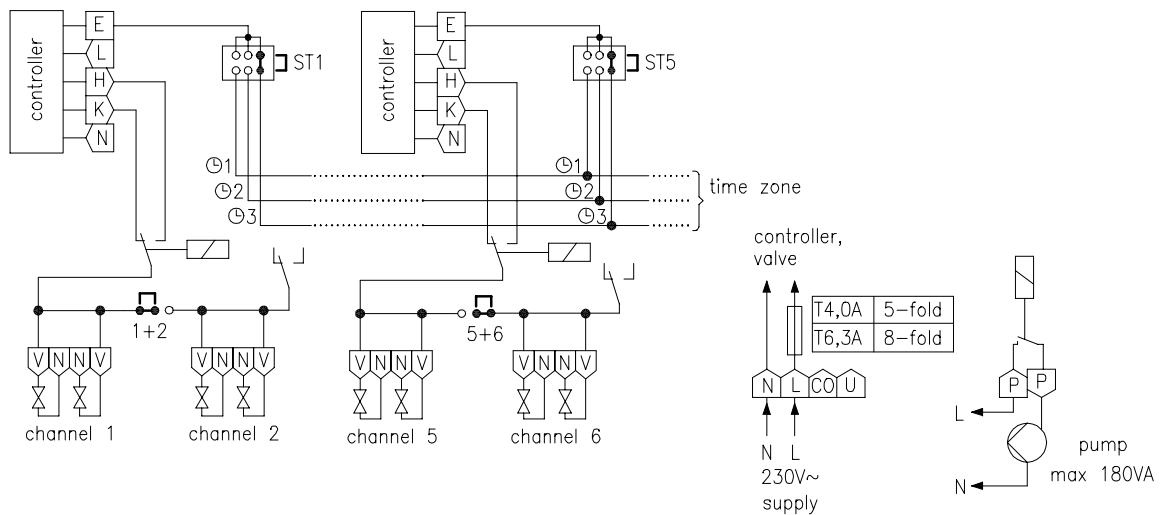


Internal view VOORL-318.xxx




Notes and examples of wiring for VOORL terminal strips

Setting up time zones

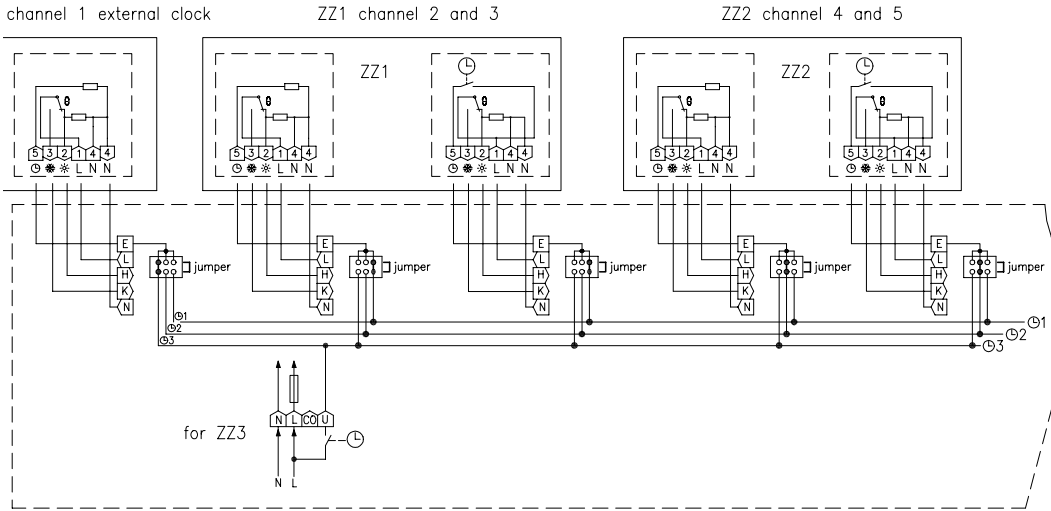


TZ = time zone

Inversion of the CO contact

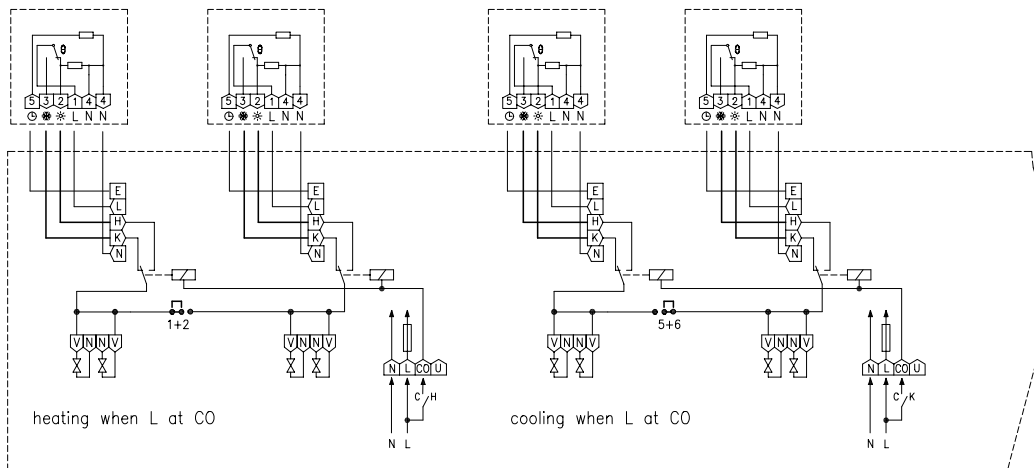

Standard wiring and combination of channel 1/2

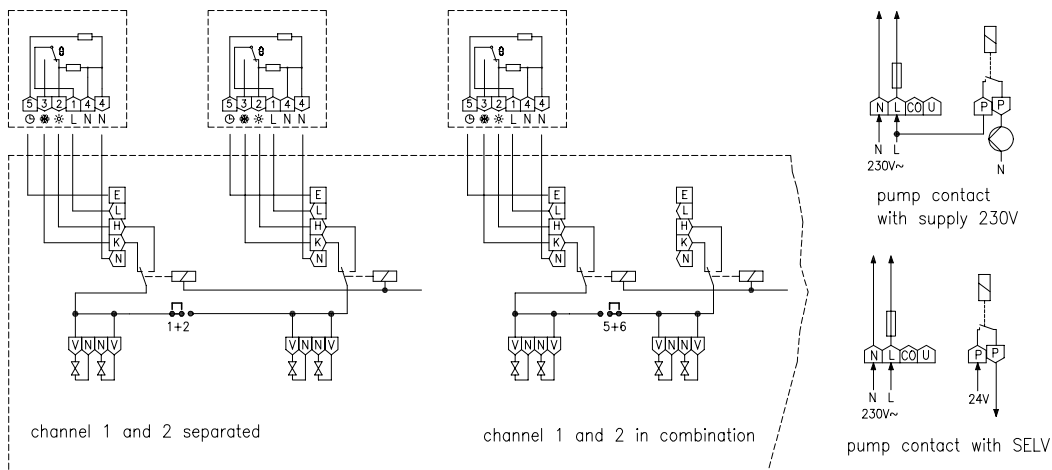

Electrothermal valve actuators

for heating, ventilation and air conditioning technology



Technical data



Housing colour:	pure white, like RAL 9010
Housing material:	PC plastic, GF (20%)
Ambient temperature:	0 ... 50 °C
Storage temperature:	-20 ... +70 °C
Permissible atmospheric humidity:	max. 95% rel. humidity, non-condensing
Mounting/attachment:	M 30 x 1.5
Protection rating:	IP 42
Protection class:	II
Safety and EMC:	according to DIN EN 60730
Average power consumption:	Approx. 3 W
Opening/closing time:	approx. 4 min
Nominal stroke:	3 mm
Function type:	normally closed
Nominal closing force:	90 N
Connecting cable:	0.8 m/2 x 0.5 mm ²
Valve position indicator:	2X (at the top and the side)

Application

Extremely compact design:
Can be fitted quickly and comfortably thanks to the slim shape in the area around the fastening nut.

Can be fitted in any position:
Lateral drainage holes carry off any leakage water that from the valve plunger into the open, thus avoiding damage to the drive.

Additional valve monitoring:
Two additional viewing windows at the side allow users to visually check the respective valve position with ease; this does not work when mounted in a suspended manner.

Type/image	Item no.	Features	PG
ZBOOA-010.100 	H9100010	Operating voltage: 230 V~, 50 Hz Max. power consumption: 70 W Max. starting current: approx. 0.3 A	I
ZBOOA-040.100 	H9100000	Operating voltage: 24 VDC or 24 VAC Max. power consumption: 12 W Max. starting current: approx. 0.5 A	I

Thanks to their M 30 x 1.5 fastening and their characteristics (normally closed), the actuators are suitable for the following valve and distributor makes: Beulco, Empur, Heimeier, Kamo, Oventrop, Purmo, SBK, SKV, Strawa, Taconova, Watts

Brief description:

The drive features a compact, space-saving design.

The device can be mounted easily thanks to its narrowed shape, especially in the fastening area of the nut.

The connecting cable is not located near the fastening nut. This reduces the probability of contact with equipment carrying hot water.



Since the fastening nut allows continuous screwing onto the thread, by unscrewing the nut by two or three turns, it is possible to open the valve in an electrically de-energised state – something that cannot be done with bayonet couplings and impulse couplings.

Discharged water is dissipated via a draining system.

Gaskets are not required thanks to the careful design.

The double position display has the following advantages:

The upper display provides the option of a visual or, in conditions of bad visibility, tactile function test of the drive. The lower viewing windows allow an additional check to determine whether the valve to be actuated follows the lifting movement of the drive. At the beginning of the heating period, it can happen off and on that the valve plungers get “stuck”. Therefore, with the additional display, it is possible to determine whether the cause lies with the actuator or with the valve in the event the valve does not open. However, that is not possible when mounted in a suspended manner.

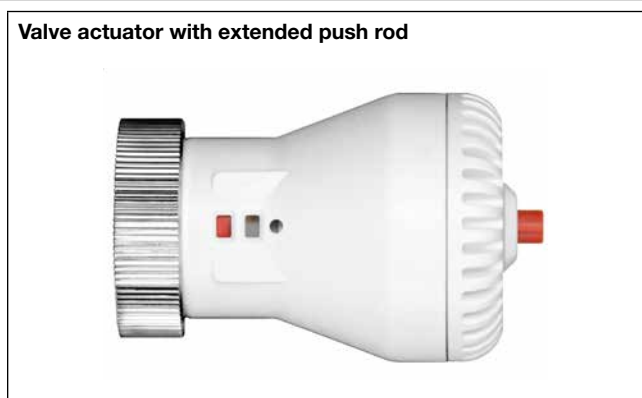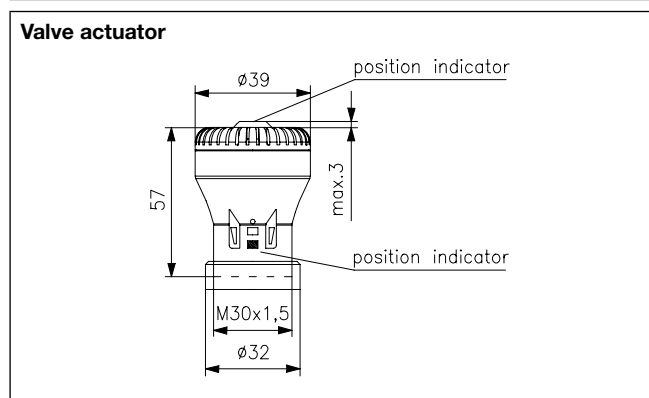

PLANT ENGINEERING



Technology for professionals,
versatile and robust.



PLANT ENGINEERING

Cutting edge, reliable technology for your systems.

Plant engineering has to be robust and fail-safe, as modern heating, ventilation and industrial plants place high demands on components, including tough environments and increasingly intensive use.

Our product portfolio includes devices for monitoring humidity, flow and pressure in order to equip supply air systems, green houses, wind tunnels, etc.

Ultra safe technology for perfectly functioning systems.









Application examples:

- Temperature control/safety temperature control, for example in air ducts, boiler systems, storage tanks, heating coils, burners, pipelines, etc.
- Frost protection of hot water heating coils
- Temperature and humidity control in control cabinets
- Humidity control in ventilation and air-conditioning ducts
- Flow monitoring, for example in ducts, supply and exhaust air devices of fans, water pipes, oil, cooling and lubrication circuits, etc.
- Pressure monitoring of gaseous media, for example for filter monitoring, fume hoods, fans, heating coils, low air pressure safety devices, limit controllers





PLANT ENGINEERING overview:





Capillary, wet room and frost protection thermostats, control cabinet controllers

	Overview of devices		148–153
	Plant room thermostats (1 and 2-setting ranges), wet room thermostats	NEW	154–159
	Universal capillary thermostat (boiler thermostat, ventilation thermostat or contact thermostat)	NEW	160–166
	Single-stage plant room thermostats with adjustable switching differential		167
	Capillary thermostats (1-, 2-stage) 0.5...4.5 m		168–170
	Contact thermostats		171
	Frost protection thermostats/monitors	NEW	172–177
	Duct thermostats, ventilation thermostats (TR, TW, STB), air heater thermostats		178–181
	Control cabinet thermostat, hygrostat		182–183

Temperature controllers, electronic

	Controllers for distributor assembly (hat rail)		184–185
	Universal controller (wall-mounting)		186

Humidity, flow, pressure monitoring

	Mechanical hygrostats		187–188
	Wind indicator relays		189
	Differential pressure switches ("pressure cells")		190–191
	Flow monitors for liquid media		192–196

Product innovation



Our new thermostats for plant engineering are now available in a modern design. They are suitable for optimum temperature control in various fields such as greenhouses, warehouses and industrial halls.

See page 154 onwards for more information



Plant engineering overview 1:

Plant room thermostats, wet room thermostats, capillary thermostats

Plant, capillary, wet room and double thermostats for indoor and outdoor use		RTKSA-100.010	RTKSA-101.010	RTKSA-100.110	RTKSA-101.110	JET-110 R	JET-110 RF	JET-120 R	JET-120 RF	RTKSA-114.110	RTKSA-114.010	PTR 40.000	JET-110 X	JET-110 XF	JET-120 XF	JET-120 X	JET-120 XG	JET-130 X	JET-130 XF	JET-130 XG	JET-133 X	JET-133 XF	JET-140 X	JET-140 XF	JET-143 XF	JET-150	JET-150 F	JET-153	JET-153 F	JMT-206 X	
Page		156	156	156	156	167	167	167	167	158	158	159	168	168	168	168	168	168	168	168	168	168	168	168	168	168	168	168	168	170	
Devices	Bimetal											x																			
	Plant room thermostat	x	x	x	x	x	x	x	x																						
	Capillary thermostat												x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	
	Wet room thermostat											x																			
	Double thermostat									x	x																				
Capillary length	Capillary 1.5 m																													x	
	Capillary 1.8 m												x	x	x	x			x	x		x	x	x	x	x	x	x	x		
	Capillary 4.5 m																x			x											
Control range	-35 ... +30 °C					x	x						x	x																	
	-20 ... +30 °C											x																			
	-10 ... +40 °C	x	x								x																				
	0 ... 50 °C			x	x																										
	0 ... 60 °C							x	x							x	x	x													
	20 ... 80 °C																													x	
	40 ... 100 °C																		x	x	x	x	x								
	70 ... 130 °C																							x	x	x					
100 ... 280 °C																										x	x	x	x		
Output	Microswitch (potential-free changeover contact)	1	1	1	1	1	1	1	1	2	2		1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2	
	Switching steps	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2	
Switching power	NC contact: 16 (2.5) A at 230 V~	x	x	x	x						x	x																			
	NO contact: 6.3 (2.5) A at 230 V~																														
	15 (8) A, 24–250 V~					x	x	x	x				x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	
	10 (4) A, 250 V~, 50 Hz, heating												x																		
	5 (2) A, 250 V~, 50 Hz, cooling												x																		
Supply voltage	None	x	x	x	x	x	x	x	x	x	x		x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x		
	230 V~, 50 Hz											x																			
Degree of protection	IP 54	x	x	x	x						x	x																			
	IP 65					x	x	x	x			x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x		
Miscellaneous	External setting	x		x		x		x					x			x	x	x		x	x		x			x		x		x	
	Internal setting		x		x		x		x	2	2	x		x	x					x			x		x	x	x		x		
	Temperature controller	x		x		x		x						x		x	x	x					x							x	
	Temperature monitor		x		x		x		x	2	2	x		x	x						x				x			x			
	Temperature limiter																						x	x		x		x	x		

Plant engineering overview 2:

Universal capillary thermostats/capillary double thermostats

Universal capillary thermostats, function without supply voltage		RTKSA-000.100	RTKSA-000.200	RTKSA-000.300	RTKSA-001.100	RTKSA-001.200	RTKSA-001.300	RTKSA-001.301	RTKSA-002.310	RTKSA-002.410	RTKSA-003.310	RTKSA-004.310	RTKSA-010.200	RTKSA-013.210	RTKSA-014.210	
Page		160	160	160	160	160	160	160	160	160	160	160	164	164	164	
Control range	0 ... 50 °C	x			x											
	0 ... 120 °C		x			x							x	x	2	
	20 ... 150 °C			x			x	x	x		x	x		x		
	30 ... 110 °C									x						
	70 ... 130 °C												x			
Output	Microswitch (potential-free changeover contact)	1	1	1	1	1	1	1	1	1	1	1	2	2	2	
	Switching power	NC contact: 16 (2.5) A at 230 V~ NO contact TR/TW/STW: 6.3 (2.5) A at 230 V~		x	x	x	x	x	x				x	x	x	x
Degree of protection	IP 40	x	x	x	x	x	x	x					x	x	x	
	IP 54								x	x	x	x				
Miscellaneous	Type testing by TÜV in accordance with DIN EN 14597	x	x	x	x	x	x	x	x	x	x	x	x	x	x	
	Temperature controller	x	x	x									x			
	Temperature monitor				x	x	x	x						x	2	
	Temperature limiter								x	x				x		
	Safety temperature limiter										x		x			
	Safety temperature monitor											x				
	External setting	x	x	x										x		
	Internal setting				x	x	x	x	x	x	x	x	x	x	2	2

Plant engineering overview 3:

Air heater thermostats

Duct rod sensors with capillary system, function without supply voltage		JTL-2	JTL-8	JTL-11	JTL-8 NR	JTL-17 NR	JTU-50	JTU-1	JTU-3	JTU-20	JTU-5	JTU-6
		Page	178	178	178	178	178	180	180	180	180	180
Devices	Duct thermostat						x	x	x	x	x	x
	Air heater thermostat	x	x	x	x	x						
Capillary length	Capillary 350 mm	x	x		x		x	x	x		x	x
	Capillary 1,250 mm			x		x				x		
Control range	-25 ... 65 °C						x					
	20 ... 70 °C	x	x	x	x	x						
	20 ... 100 °C							x	x	x		
	60 ... 140 °C										x	x
	70 ... 95 °C				x	x						
	70 ... 100 °C	x	x	x								
	100 °C rod fixed				x	x						
Output	Microswitch (potential-free changeover contact)	x	x	x	x	x	x	x	x	x	x	x
Switching power	15 (8) A, 24–250 V~	x	x	x	x	x	x	x	x	x	x	x
Protection rating	IP 40	x	x	x	x	x	x	x	x	x	x	x
Miscellaneous	Type testing by TÜV in accordance with DIN EN 14597	x	x	x	x	x			x	x		
	Temperature monitor	x		x	x	x	x	x			x	
	Temperature limiter											x
	Safety temperature limiter		x		x	x			x	x		
	Internal setting	x	x	x	x	x	x	x	x	x	x	x

Plant engineering overview 4:

Contact and frost protection thermostats

Contact and frost protection thermostats		ATR 83.000	ATR 83.100	ATR 83.001	ATR 83.101	JTF-1	JTF-1/12	JTF-1 W	JTF-2	JTF-2 W	JTF-3	JTF-3 W	JTF-4	JTF-5	JTF-21	JTF-21/12	JTF-21 W	JTF-22	JTF-22/12	JTF-25	RTKSA-203.000	RTKSA-203.100	RTKSA-203.120	RTKSA-203.200	RTKSA-203.220	RTKSA-203.300	RTKSA-204.000	RTKSA-204.020	RTKSA-204.100	RTKSA-204.200	RTKSA-204.220	RTKSA-204.300	
Page		171	171	171	171	175	175	175	175	175	175	175	175	175	176	176	176	176	176	176	173	173	173	173	173	173	173	173	173	173	173	173	
Devices	Contact thermostat	x	x	x	x																												
	Frost protection thermostat					x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	
Capillary length	Capillary 1,800 mm										x	x	x									x					x	x					
	Capillary 3,000 mm													x								x	x						x				
	Capillary 6,000 mm					x		x	x	x					x		x	x						x	x					x	x		
	Capillary 12,000 mm						x									x				x						x						x	
Output	Microswitch (potential-free changeover contact)	x	x	x	x	x	x	x	x	x	x	x	x	x	2	2	2	2	2	2	2	x	x	x	x	x	x	x	x	x	x	x	
Control range	-10...+12 °C					x	x	x	x	x	x	x	x	x	x	x	x	x	x	x													
	-10 to +15 °C																					x	x	x	x	x	x	x	x	x	x	x	
	0...60 °C			x	x																												
	30...90 °C	x	x																														
Switching power	15 (8) A, 24-250 V~					x	x	x	x	x	x	x	x	x	x	x	x	x	x	x													
	16 (2) A, 24-250 V~	x	x	x	x																												
	NC contact: 16 (2.5) A at 230 V~																																
	NO contact STW: 6.3 (2.5) A at 230 V~																					x	x	x	x	x	x	x	x	x	x	x	x
Supply voltage	None	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	
Degree of protection	IP 20	x	x	x	x																												
	IP 40					x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
	IP 65							x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
Miscellaneous	Type testing by TÜV in accordance with DIN EN 14597					x	x	x	x	x	x	x	x	x	x	x	x	x	x	x		x	x	x	x	x	x	x	x	x	x	x	x
	Temperature controller	x		x																													
	Temperature monitor		x		x	x	x	x			x	x		x	x	x	x																
	Temperature limiter																		x	x													
	Safety temperature limiter								x	x			x									x	x	x	x	x							
	Safety temperature monitor																										x	x	x	x	x	x	x
	External setting	x		x		x	x		x		x		x	x	x	x	x																
Internal setting		x		x			x		x		x						x					x	x	x	x	x	x	x	x	x	x	x	

Plant engineering overview 5:

Temperature controllers, electronic

Electronic temperature controllers, digital controllers/ displays		ITR 79.402	ITR 79.404	ITR 79.405	ITR 79.408	ITR 79.503	ITR 79.504	ITR 79.508	ITR 79.600	ITR 79.804	ETR 77.008-5	ETR 77.009-5
		Page	184	184	184	184	184	184	184	184	184	186
Devices	Standard or top-hat rail controllers	x	x	x	x	x	x	x	x	x		
	Universal controllers										x	x
Control range	-50 ... +50 °C										x	
	-35 ... +15 °C	x										
	-10 ... +40 °C				x			x				
	0 ... 11 °C					x						
	0 ... 60 °C		x				x			x		
	0 ... 100 °C											x
	5 ... 30 °C								2			
	35 ... 95 °C			x								
Switching power	10 (3) A, 250 V~, make contact	x	x	x	x	x	x	x	x	x		
	5 (1.5) A / 250 V~, break contact	x	x	x	x	x	x	x	x	x		
	10 (3) A, 250 V~, heating contact										x	x
	5 (1) A, 250 V~, cooling contact										x	x
Degree of protection	IP 20	x	x	x	x	x	x	x	x	x		
	IP 65										x	x
Miscellaneous	Temperature controller	x	x	x	x	x	x	x	x	x		
	Temperature monitor										x	x
	Internal setting										x	x
	LED heating (red)	x	x	x	x	x				x	x	x
	LED cooling (green)						x	x				
	230 V~, 50 Hz	x	x	x	x	x	x	x	x	x	x	x

Plant engineering overview 6:

Flow monitors and pressure switches

Flow and pressure monitoring		JSL-1E	JDW-3/JDW-3Z	JDW-5/JDW-5Z	JDW-10	JDL-111	JDL-112	JDL-115	JDL-116	JDL-116A	JSF-3E	JSF-4E	JSF-1E	JSF-1RE	JSF-2E	JSF-2RE	JSW-1/2	JSW-3/4	JSW-1	
Page		189	190	190	190	190	190	190	190	190	192	192	192	192	192	192	195	195	195	
Devices	Wind indicator relays	x																		
	Differential pressure switches		x	x	x	x	x	x	x	x										
	Flow monitors										x	x	x	x	x	x	x	x	x	x
Sensor element	Wind indicator	x																		
	Pressure sensor (membrane)		x	x	x	x	x	x	x	x										
	Paddle										x	x	x	x	x	x	x	x	x	x
Output	Microswitch (potential-free changeover contact)	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
Switching range	1–8 m/s switch-off value	x																		
	Dependent on the tube diameter										x	x	x	x	x	x	x	x	x	x
	20–300 Pa					x														
	20–330 Pa		x																	
	30–500 Pa			x																
	40–600 Pa						x													
	100–1,000 Pa							x												
	250–5,000 Pa								x	x										
Switching power	15 (8) A, 24–250 V~	x									x	x	x	x	x	x				
	1.5 (0.4) A, 12–250 V~		x	x	x															
	1 (0.2) A, 12–24 V~/=		x	x	x	x	x	x	x	x										
	5 (1) A, 12–250 V~					x	x	x	x	x										
	5 (1.5) A, 24–230 V~																x	x	x	
Operating voltage	None	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x
Degree of protection	IP 54		x	x	x	x	x	x	x	x										
	IP 65	x									x	x	x	x	x	x	x	x	x	x
Miscellaneous	Type tested by the TÜV according to the current 100 to 6°.										x	x	x	x	x	x				
	External setting									x										
	Internal setting	x	x	x	x	x	x	x	x		x	x	x	x	x	x	x	x	x	x

Now in a new design – Thermostats for plant engineering from alre

alre is proud to present new thermostats for plant engineering (RTKSA) which can be used in a wide range of fields, offering you many application possibilities.

Whether you need a solution for a greenhouse, industrial building or warehouse, the thermostats are suitable for optimum temperature control in many fields.

In combination with various accessories, the **universal controller can operate as a boiler, ventilation or contact thermostat.**

Modern design and versatile applications



Universal controllers



Universal dual controllers



Plant room controllers



Frost protection controllers

Combinations with accessories



+



JZ-29 (mounting set)

+



Immersion sleeve (THK/NTHK)

=


BOILER THERMOSTAT

+



JZ-29 (mounting set)

+



Protection coil (SWK)

=

VENTILATION THERMOSTAT

+



JZ-31 Worm screw clamp

=

CONTACT THERMOSTAT

For double thermostats, use the JZ-30 mounting set.

See page 160 onwards for more information on universal thermostats

Plant room thermostat RTKSA

Capillary system – external sensors



Technical data	Application
----------------	-------------

Colour: Anthracite grey (similar to RAL7016), front side transparent

Sensor material: V4A

Max. sensor temperature: Top scale value +15%

Max. head temperature: 50 °C

Permissible atmospheric humidity: Max. 95% rel. humidity, non-condensing

Operating voltage: none

Max. switching current: **NC contact:** 16 (2.5) A at 230 VAC +10%
0.25 A at 230 VDC +10%
NO contact: 6.3 (2.5) A at 230 VAC +10%
0.25 A at 230 VDC +10%

Min. switching current: Min. 100 mA at 24 V (AC/DC)

Max. switching voltage: 230 VAC 50/60 Hz, 230 VDC

Min. switching voltage: 24 VAC/50 Hz, 24 VDC

Switching element: microswitch

Switching contact: toggler, potential-free

Control function: heating or cooling

Hysteresis: 1.3 K

Electrical connection: Push-in terminals

Mounting/attachment: wall mounting

Protection class: I

Protection rating: IP 54 (optionally IP 65)

Safety and EMC: In accordance with DIN EN 60730 (VDE 0631)

Sensor: liquid-filled capillary

General features: Scale: degrees Celsius

RTKSA plant room thermostats were specially developed for use in industrial halls, exhibition halls, air halls and greenhouses. When used as a frost protection controller, the higher tolerances at the end of the scale must be observed.

Type testing by TÜV in accordance with DIN EN 14597



Type	Item no.	Control range	Hysteresis	Features	PG
RTKSA-100.010	KA010000	-10 ... +40 °C	1.3 K	TR, external setting	II
RTKSA-101.010	KA010100	-10 ... +40 °C	1.3 K	TW, internal setting	II
RTKSA-100.110	KA010001	0 ... +50 °C	1.3 K	TR, external setting	II
RTKSA-101.110	KA010101	0 ... +50 °C	1.3 K	TW, internal setting	II

TR = temperature controller, TW = temperature monitor

Type comparison (old/new type)




Old alre types	Control range	Hysteresis	New alre types	Control range	Hysteresis
JET-40	0 ... +35 °C	1 K	RTKSA-100.010	-10 ... +40 °C	1.3 K
JET-40F	0 ... +35 °C	1 K	RTKSA-101.010	-10 ... +40 °C	1.3 K
JET-41	0 ... +70 °C	2 K	RTKSA-100.110	0 ... +50 °C	1.3 K
JET-41F	0 ... +70 °C	2 K	RTKSA-101.110	0 ... +50 °C	1.3 K

TR = temperature controller, TW = temperature monitor

NEW

Plant room thermostat RTKSA

Capillary system – external sensors

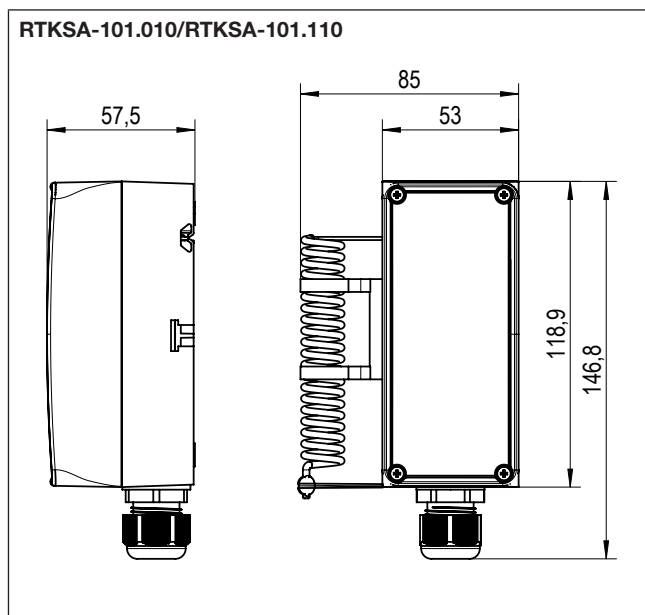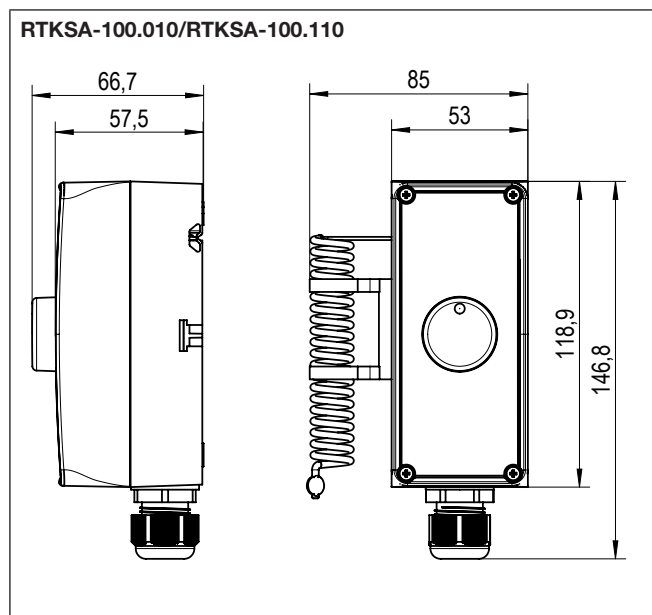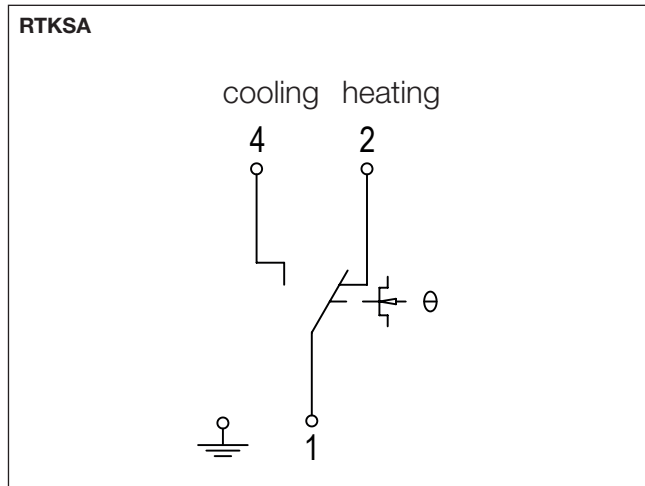

NEW Scan the QR code now and watch the "New thermostats in plant engineering" product film. More information at a glance.



Plant room double thermostat RTKSA

Capillary system – external sensors – 2 separate setting ranges



Technical data Application

Colour: Anthracite grey (similar to RAL 7016), front side transparent

Sensor material: V4A

Max. sensor temperature: Top scale value +15%

Max. head temperature: 50 °C

Permissible atmospheric humidity: Max. 95% rel. humidity, non-condensing

Operating voltage: none

Max. switching current: **NC contact:** 16 (2.5) A at 230 VAC +10%
0.25 A at 230 VDC +10%
NO contact: 6.3 (2.5) A at 230 VAC +10%
0.25 A at 230 VDC +10%

Min. switching current: Min. 100 mA at 24 V (AC/DC)

Max. switching voltage: 230 VAC 50/60 Hz, 230 VDC

Min. switching voltage: 24 VAC/50 Hz, 24 VDC

Switching element: microswitch

Switching contact: 2 x togglers, potential-free

Control function: Heating or cooling, heating and cooling

Hysteresis: 1.3 K

Electrical connection: Push-in terminals

Mounting/attachment: wall mounting

Protection class: I

Protection rating: IP 54 (optionally IP 65)

Safety and EMC: In accordance with DIN EN 60730 (VDE 0631)

Sensor: liquid-filled capillary

General features: Scale: degrees Celsius

RTKSA plant room thermostats were specially developed for use in industrial halls, exhibition halls, air halls and greenhouses. When used as a frost protection controller, the higher tolerances at the end of the scale must be observed.

2 separate setting ranges, heating and/or cooling.

Type testing by TÜV in accordance with DIN EN 14597





Type	Item no.	1st Control range	2nd Control range	Features	PG
RTKSA-114.110	KA011100	0...+50 °C (TW, internal)	0...+50 °C (TW, internal)	2 x internal setting	II
RTKSA-114.010	KA011101	-10...+40 °C (TW, internal)	-10...+40 °C (TW, internal)	2 x internal setting	II

TW = temperature monitor

Type comparison (old/new type)

Old alre types	Control range	Hysteresis	New alre types	Control range	Hysteresis
JET-30	10... 45 °C (external) TR 0... 35 °C (internal) TW	approx. 1 K	RTKSA-114.110	0...+50 °C (internal) TW 0...+50 °C (internal) TW	1.3 K
JET-31	10... +45 °C (internal) TW 0... +35 °C (internal) TW	approx. 1 K			

TR = temperature controller, TW = temperature monitor

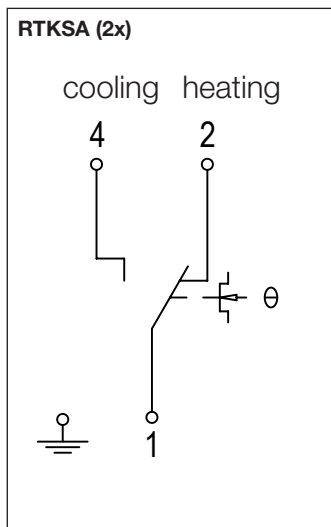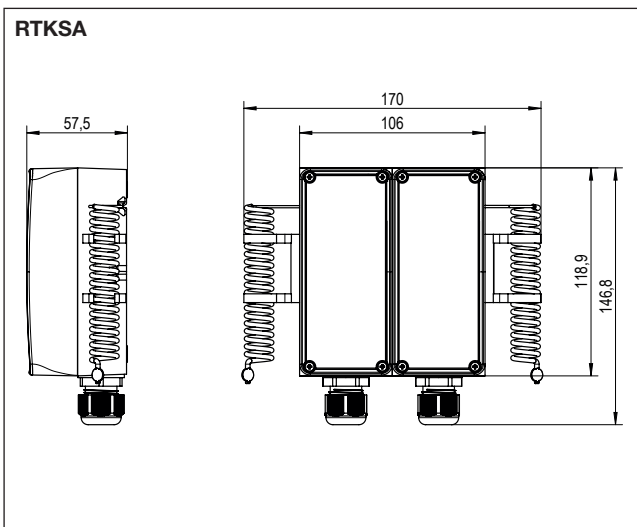

Scan the QR code now and watch the "New thermostats in plant engineering" product film. More information at a glance.



Wet room thermostat PTR 40

Bimetal





Technical data

Housing colour:	grey (lower part like RAL 7016, upper part like RAL 7035)
Ambient temperature:	-20 ... +60 °C
Permissible atmospheric humidity:	Max. 95% rel. humidity, non-condensing
Operating voltage:	230 VAC, 50 Hz
Max. switching current:	heating (terminal 3) 10 (4) A, cooling (terminal 1) 5 (2) A
Max. switching voltage:	230 VAC, 50 Hz
Min. switching voltage:	230 VAC, 50 Hz
Switching element:	bimetallic contact
Control range:	-20 ... +30 °C
Hysteresis:	approx. 2 K at a temperature change of max. 4 K/h
Electrical connection:	screw-type terminals 0.12 mm ² to 2.5 mm ²
Mounting/attachment:	wall mounting
Protection rating:	IP 65
Protection class:	II
Safety and EMC:	according to DIN EN 60730
Sensor:	bimetal
Function type:	TW (temperature monitor)
General features:	thermal feedback, internal setting, scale: degrees Celsius

Application

Control and monitoring of temperatures of certain open spaces, for example, driveways or damp rooms (greenhouses, sheds, warehouses and basements, garages, etc.).

Type	Item no.	Features	PG
PTR 40.000	A201410	switching contact changeover switch (togger), control function heating or cooling, viewing window	II

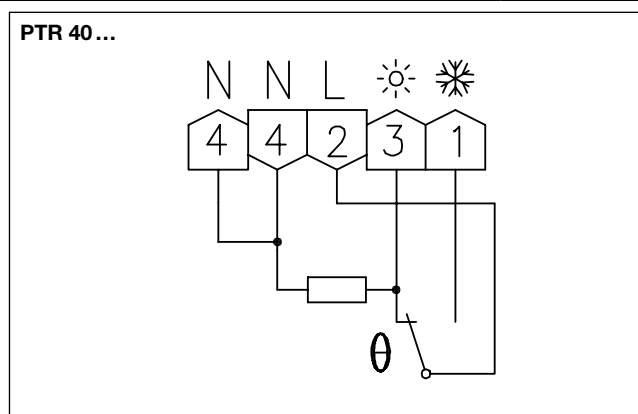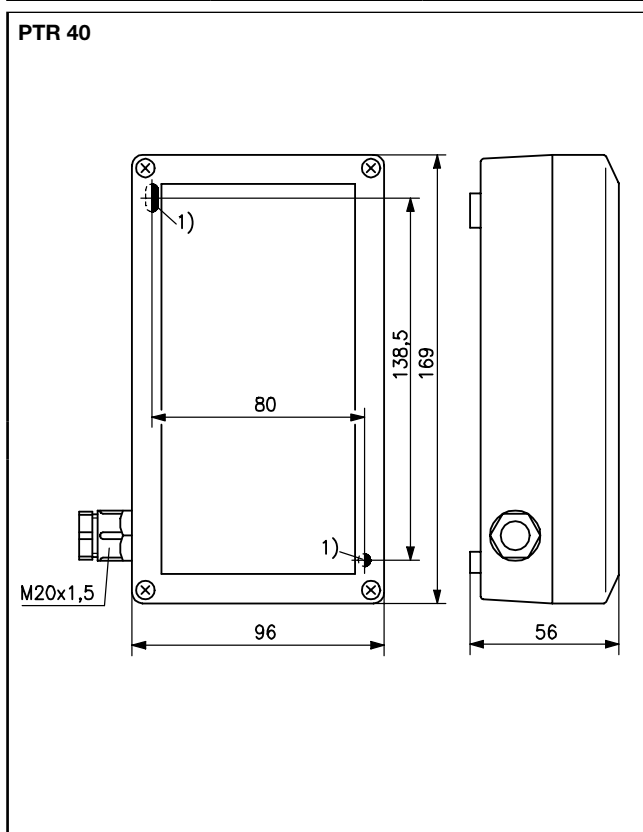

Universal capillary thermostat RTKSA

Capillary system – TÜV-tested



Technical data **Application**

Colour: Anthracite grey (similar to RAL 7016), front side transparent

Sensor material: Cu

Sensor length: 2 m

Max. sensor temperature: Top scale value +15%

Max. head temperature: 80 °C

Permissible atmospheric humidity: Max. 95% rel. humidity, non-condensing

Operating voltage: none

Max. switching current: **NC contact:**
16 (2.5) A at 230 VAC +10%
0.25 A at 230 VDC +10%
NO contact TR/TW/STW:
6.3 (2.5) A at 230 VAC +10%
0.25 A at 230 VDC +10%
NO contact TB:
2.0 (0.4) A at 230 VAC +10%
0.25 A at 230 VDC +10%

Min. switching current: Min. 100 mA at 24 V (AC/DC)

Max. switching voltage: 230 VAC 50/60 Hz, 230 VDC

Min. switching voltage: 24 VAC/50 Hz, 24 VDC

Switching element: microswitch

Switching contact: toggler, potential-free

Control range: heating or cooling

Electrical connection: Push-in terminals

Mounting/attachment: Wall mounting or with optional process connection (immersion sleeve, protection coil or mounting set JZ-31 for pipe mounting)

Protection class: I

Protection rating: RTKSA-xxx.x0x IP 40,
RTKSA-xxx.x1x IP 54,
optional IP 65

Safety and EMC: In accordance with DIN EN 60730 (VDE 0631)

Sensor: liquid-filled capillary

General features: Scale: degrees Celsius

This series of devices was specially developed for use in heating technology; in boiler systems or storage tanks; district heating transfer stations and heat transfer systems; in ventilation technology to monitor supply air or as limiters for electrical heating coils, as well as for controlling and monitoring temperatures in pipelines and tanks.

Immersion sleeves, protection coils and mounting sets are not included in the scope of delivery. The JZ-29 mounting set must be used in conjunction with immersion sleeves or protection coils. When used as contact controller (pipe mounting), mounting set JZ-31 must be used.

Type testing by TÜV in accordance with DIN EN 14597



Type	Item no.	Control range	Hysteresis	Sensor Ø x L	Features	PG
RTKSA-000.100	KA000000	0... 50 °C	1.3 K	6 x 175 mm	TR, external setting	II
RTKSA-000.200	KA000001	0... 120 °C	3 K	6 x 87 mm	TR, external setting	II
RTKSA-000.300	KA000002	20... 150 °C	9.1 K	6 x 56 mm	TR, external setting	II
RTKSA-001.100	KA000100	0... 50 °C	1.3 K	6 x 175 mm	TW, internal setting	II
RTKSA-001.200	KA000101	0... 120 °C	3 K	6 x 87 mm	TW, internal setting	II
RTKSA-001.300	KA000102	20... 150 °C	9.1 K	6 x 56 mm	TW, internal setting	II
RTKSA-001.301	KA000103	20... 150 °C	3.3 K	6 x 82 mm	TW, internal setting	II
RTKSA-002.310	KA000201	20... 150 °C	-10... -15 K*	6 x 55 mm	TB, internal setting, external reset	II
RTKSA-002.410	KA000200	30... 110 °C	-10... -15 K*	6 x 72 mm	TB, internal setting, external reset	II
RTKSA-003.310	KA000300	20... 150 °C	-10... -15 K*	6 x 55 mm	STB, internal setting, external reset	II
RTKSA-004.310	KA000400	20... 150 °C	-10 K	6 x 55 mm	STW, internal setting	II

TR = temperature controller, TW = temperature monitor, TB = temperature limiter, STB = safety temperature limiter, STW = safety temperature monitor
* Manual reset after cooling down by 10–15 K (depending on configured setpoint)

Universal capillary thermostat RTKSA

Capillary system – TÜV-tested

Accessories	Item no.	Length of	Material	Diameter I x A**	Features	PG
THK-2-100	KA969901	100 mm	nickel-plated brass	7.5 x 10 mm	Immersion sleeve	II
THK-2-120	KA969902	120 mm	nickel-plated brass	7.5 x 10 mm	Immersion sleeve	II
THK-2-200	KA969903	200 mm	nickel-plated brass	7.5 x 10 mm	Immersion sleeve	II
THK-2-280	KA969904	280 mm	nickel-plated brass	7.5 x 10 mm	Immersion sleeve	II
THK-2-600	KA969905	600 mm	nickel-plated brass	7.5 x 10 mm	Immersion sleeve	II
NTHK-2-100	KA969906	100 mm	V4A (1.4571)	7.5 x 10 mm	Immersion sleeve	II
NTHK-2-120	KA969907	120 mm	V4A (1.4571)	7.5 x 10 mm	Immersion sleeve	II
NTHK-2-200	KA969908	200 mm	V4A (1.4571)	7.5 x 10 mm	Immersion sleeve	II
NTHK-2-280	KA969909	280 mm	V4A (1.4571)	7.5 x 10 mm	Immersion sleeve	II
SWK-2-100	KA989901	100 mm	steel, nickel-plated	10.5 x 17 mm	Protection coil with flange plate	II
SWK-2-200	KA989903	200 mm	steel, nickel-plated	10.5 x 17 mm	Protection coil with flange plate	II

** I = minimum inner diameter / A = nominal outer diameter

See page 218–219 for pictures and dimension diagrams for immersion sleeves/protection coils

Accessories	Item no.	Features	PG
JZ-29	KA999901	Mounting set RTKSA for THK/NTHK/SWK individual controllers	II
JZ-31	KA999903	Mounting set RTKSA for pipe mounting contact controller (worm screw clamp)	II

Type comparison (old/new type)

Old alre types	Control range	Hysteresis	New alre types	Control range	Hysteresis	Accessories
KR 80.312	fixed at 100 °C	-20 K	RTKSA-003.310	20... 150 °C	-10 K	THK-2-100 + JZ-29
LR 80.312	fixed at 100 °C	-20 K				SWK-2-100
KR 80.318	fixed at 100 °C	-20 K				THK-2-200 + JZ-29
LR 80.318	fixed at 100 °C	-20 K				SWK-2-200
KR 80.309	fixed at 75 °C	-20 K				THK-2-100 + JZ-29
LR 80.309	fixed at 75 °C	-20 K				SWK-2-100
KR 80.310	fixed at 75 °C	-20 K				THK-2-200 + JZ-29
LR 80.310	fixed at 75 °C	-20 K				SWK-2-200
KR 80.206	30... 65 °C	-8 K	RTKSA-002.410	30... 110 °C	-10 K	THK-2-100 + JZ-29
KR 80.206 IP 54	30... 65 °C	-8 K				THK-2-100 + JZ-29
KR 80.207	60... 95 °C	-8 K				THK-2-100 + JZ-29
LR 80.207	60... 95 °C	-8 K				SWK-2-100
KR 80.208	85... 120 °C	-8 K	RTKSA-002.310	20... 150 °C	-10 K	THK-2-100 + JZ-29
KR 80.202	95... 130 °C	-8 K				THK-2-100 + JZ-29
KR 80.203	95... 130 °C	-8 K				THK-2-200 + JZ-29
LR 80.203	95... 130 °C	-8 K				SWK-2-200
KR 80.203 IP 54	95... 130 °C	-8 K				THK-2-200 + JZ-29
-	-	-				-
WR 81.029-1	0... 35 °C	0.5... 1 K	RTKSA-000.100	0... 50 °C	1.3 K	THK-2-120 + JZ-29
KR 80.003-1	0... 35 °C	1 K				SWK-2-120
LR 80.003-1	0... 35 °C	1 K				-
WR 81.009-2	0... 70 °C	1... 2 K	RTKSA-000.200	0... 120 °C	3 K	-
KR 80.035-2	0... 70 °C	2 K				THK-2-100 + JZ-29
KR 80.027-5	0... 70 °C	5 K				THK-2-100 + JZ-29
LR 80.027-5	0... 70 °C	5 K				SWK-2-100
LR 80.035-2	0... 70 °C	2 K				SWK-2-100
KR 80.028-2	0... 70 °C	2 K				THK-2-200 + JZ-29
LR 80.028-2	0... 70 °C	2 K				SWK-2-200
KR 80.029-2	0... 70 °C	2 K				THK-2-280 + JZ-29
KR 80.029-2 V4A	0... 70 °C	3 K				NTHK-2-280 + JZ-29
LR 80.029-2	0... 70 °C	2 K				SWK-2-280
KR 80.011-1 V4A	10... 45 °C	1 K				NTHK-2-120 + JZ-29
KR 80.009-1 V4A	10... 45 °C	1 K				NTHK-2-200 + JZ-29
KR 80.000-5	35... 95 °C	5 K				THK-2-100 + JZ-29
KR 80.001-5	35... 95 °C	5 K				THK-2-200 + JZ-29
KR 80.001-5 V4A	35... 95 °C	5 K				NTHK-2-200 + JZ-29
KR 80.008-8	40... 110 °C	8 K				THK-2-100 + JZ-29

Type comparison (old/new type)

Old alre types	Control range	Hysteresis	New alre types	Control range	Hysteresis	Accessories
KR 80.006-8	50...130 °C	8 K	RTKSA-000.300	20...150 °C	9.1 K	THK-2-100 + JZ-29
WR 81.101-1	0...35 °C	0.5...1 K	RTKSA-001.100	0...50 °C	1.3 K	-
WR 81.129-1	0...35 °C	0.5...1 K				-
KR 80.108-1	0...35 °C	1 K				THK-2-120 + JZ-29
LR 80.108-1	0...35 °C	1 K				SWK-120
KR 80.109-1	0...35 °C	1 K				THK-2-200 + JZ-29
LR 80.109-1	0...35 °C	1 K				SWK-2-200
WR 81.115-5	0...70 °C	4 K				JZ-31
WR 81.109-2	0...70 °C	1...2 K	-			
KR 80.116-2	0...70 °C	2 K	RTKSA-001.200	0...120 °C	3 K	THK-2-100 + JZ-29
LR 80.116-2	0...70 °C	2 K				SWK-2-100
KR 80.111-3	0...80 °C	1 K				THK-2-100 + JZ-29
KR 80.120-1	10...45 °C	1 K				THK-2-200 + JZ-29
LR 80.120-1	10...45 °C	1 K				SWK-2-200
KR 80.100-5	35...95 °C	5 K				THK-2-100 + JZ-29
KR 80.100-5 IP 54	35...95 °C	5 K				NTHK-2-100 + JZ-29
KR 80.101-5	35...95 °C	5 K	RTKSA-001.301	20...150 °C	3.3 K	THK-2-200 + JZ-29
LR 80.101-5	35...95 °C	5 K				SWK-2-200
KR 80.124-5	35...95 °C	5 K				THK-2-280 + JZ-29
KR 80.112-5	35...95 °C	8 K				THK-2-600 + JZ-29
KR 80.102-8	40...110 °C	8 K				THK-2-100 + JZ-29
KR 80.103-8	40...110 °C	8 K				THK-2-200 + JZ-29
WR 81.117-5	50...130 °C	4 K				JZ-31
KR 80.006-8	50...130 °C	8 K	RTKSA-001.300	20...150 °C	9.1 K	THK-2-100 + JZ-29


RTKSA with internal setting




RTKSA with internal setting and external reset



RTKSA TR

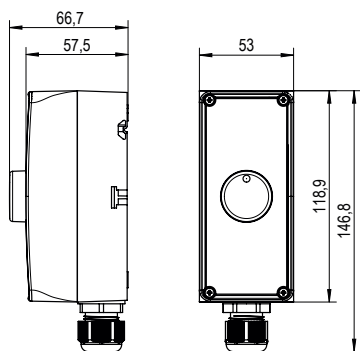


RTKSA TB/STB

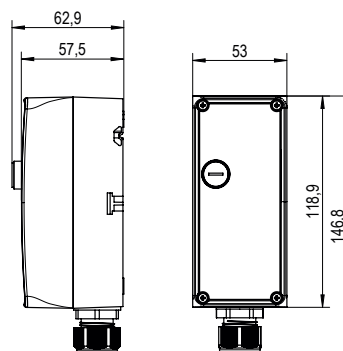



Universal capillary thermostat RTKSA

Capillary system – TÜV-tested


NEW

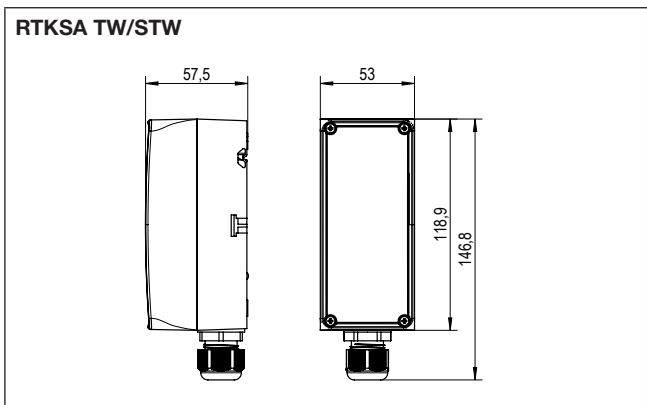

NEW Scan the QR code now and watch the "New thermostats in plant engineering" product film. More information at a glance.

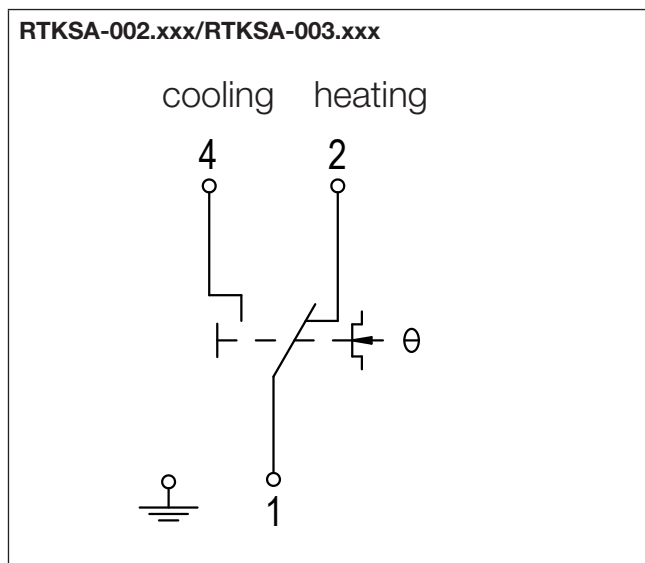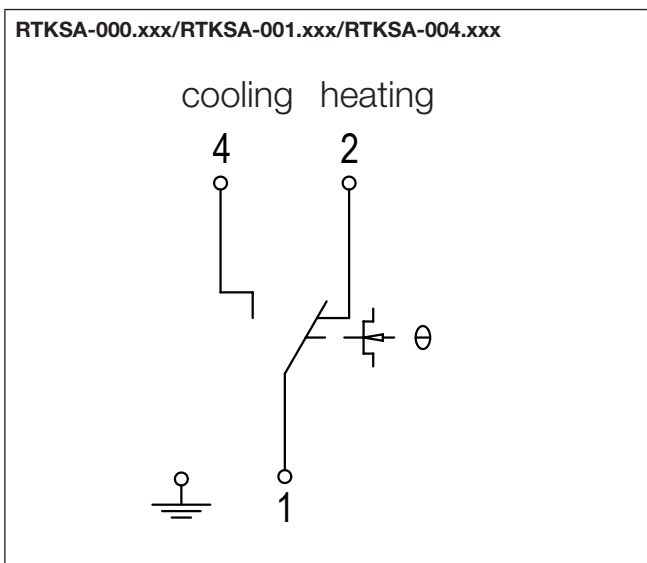



Technical data		Application
Colour:	Anthracite grey (similar to RAL7016), front side transparent	<p>This series of devices was specially developed for use in heating technology; in boiler systems or storage tanks; district heating transfer stations and heat transfer systems; in ventilation technology to monitor supply air or as limiters for electrical heating coils, as well as for controlling and monitoring temperatures in pipelines and tanks.</p> <p>Immersion sleeves, protection coils and mounting set JZ-31 for pipe mounting are not included in the scope of delivery.</p> <p>Accessory JZ-30 must be used in conjunction with immersion sleeves.</p> <p>Type testing by TÜV in accordance with DIN EN 14597</p> 
Sensor material:	Cu	
Sensor length:	2 m	
Max. sensor temperature	Top scale value +15%	
Max. head temperature:	80 °C	
Permissible atmospheric humidity:	Max. 95% rel. humidity, non-condensing	
Operating voltage:	none	
Max. switching current:	NC contact: 16 (2.5) A at 230 VAC +10% 0.25 A at 230 VDC +10% NO contact TR/TW: 6.3 (2.5) A at 230 VAC +10% 0.25 A at 230 VDC +10% NO contact TB/STB: 2.0 (0.4) A at 230 VAC +10% 0.25 A at 230 VDC +10%	
Min. switching current:	Min. 100 mA at 24 V (AC/DC)	
Max. switching voltage:	230 VAC 50/60 Hz, 230 VDC	
Min. switching voltage:	24 VAC/50 Hz, 24 VDC	
Switching element:	microswitch	
Switching contact:	2 x togglers, potential-free	
Control range:	heating or cooling	
Electrical connection:	Push-in terminals	
Mounting/attachment:	Wall mounting or with optional process connection (immersion sleeve or protection coil)	
Protection class:	I	
Protection rating:	IP 40, optional IP 65	
Safety and EMC:	In accordance with DIN EN 60730 (VDE 0631)	
Sensor:	liquid-filled capillary	
General features:	Scale: degrees Celsius	

Type	Item no.	Control range	Hysteresis	Sensor Ø x L	Features	PG
RTKSA-010.200	KA001000	TR: 0 ... 120 °C STB: 70 ... 130 °C	TR: 3 K STB: -10 ... -15 K*	6 x 87 mm 6 x 66 mm	TR (external setting), STB (internal setting/external reset)	II
RTKSA-013.210	KA001200	TW: 0 ... 120 °C TB: 20 ... 150 °C	TW: 3 K TB: -10 ... -15 K*	6 x 87 mm 6 x 55 mm	TW (internal setting) TB (internal setting/external reset)	II
RTKSA-014.210	KA001100	TW: 0 ... 120 °C TW: 0 ... 120 °C	TW: 3 K TW: 3 K	6 x 87 mm 6 x 87 mm	2x TW (internal setting)	II

TR = temperature controller, TW = temperature monitor, TB = temperature limiter, STB = safety temperature limiter
 * Manual reset after cooling down by 10–15 K (depending on configured setpoint)

Accessories	Item no.	Length of	Material	Diameter IxA**	Features	PG
THK-2-100x17	KA979901	100 mm	nickel-plated brass	14.8 x 17 mm	Immersion sleeve	II
THK-2-200x17	KA979902	200 mm	nickel-plated brass	14.8 x 17 mm	Immersion sleeve	II
NTHK-2-100x17	KA979903	100 mm	V4A (1.4571)	14.8 x 17 mm	Immersion sleeve	II
NTHK-2-200x17	KA979904	200 mm	V4A (1.4571)	14.8 x 17 mm	Immersion sleeve	II
SWK-2-100	KA989901	100 mm	steel, nickel-plated	10.5 x 17 mm	Protection coil with flange plate	II
SWK-2-200	KA989903	200 mm	steel, nickel-plated	10.5 x 17 mm	Protection coil with flange plate	II

** I = minimum inner diameter / A = nominal outer diameter
 See page 218–219 for pictures and dimension diagrams for immersion sleeves/protection coils

Universal capillary double thermostat RTKSA



Capillary system – TÜV-tested



Accessories	Item no.	Features	PG
JZ-30	KA999902	Mounting set RTKSA for THK/NTHK/SWK double controllers	II

Type comparison (old/new type)

Old alre types	Control range	Hysteresis	New alre types	Control range	Hysteresis	Accessories
KR 85.100-5	TR 35...95 °C TW 35...95 °C	5 K 5 K	RTKSA-014.210	TW: 0... 120 °C TW: 0... 120 °C	3 K 3 K	THK-2-100x17 + JZ-30
KR 85.406-2	TW 0... 70 °C TW 0... 70 °C	2 K 2 K				THK-2-100x17 + JZ-30
KR 85.101-5	TR 35...95 °C TW 35...95 °C	5 K 5 K				THK-2-200x17 + JZ-30
KR 85.102-5	TR 35...95 °C TW 50... 130 °C	5 K 8 K				THK-2-100x17 + JZ-30
KR 85.109-2	TR 0... 70 °C TW 0... 70 °C	2 K 2 K				THK-2-100x17 + JZ-30
KR 85.400-5	TW 35...95 °C TW 35...95 °C	5 K 5 K				THK-2-100x17 + JZ-30
KR 85.401-5	TW 35...95 °C TW 35...95 °C	5 K 5 K				THK-2-200x17 + JZ-30
KR 85.315-5	TR 35...95 °C STB fixed at 100 °C	5 K -20 K	RTKSA-010.200	TR: 0... 120 °C STB: 7... 130 °C	3 K -10... -15 K	THK-2-200x17 + JZ-30
KR 85.311-2	TR 0... 70 °C STB fixed at 75 °C	2 K -20 K				THK-2-100x17 + JZ-30
KR 85.312-2	TR 0... 70 °C STB fixed at 75 °C	2 K -20 K				THK-2-200x17 + JZ-30
KR 85.314-5	TR 35...95 °C STB fixed at 100 °C	5 K -20 K				THK-2-100x17 + JZ-30
LR 85.315-5	TR 35...95 °C STB fixed at 100 °C	5 K -20 K				SWK-2-200
LR 85.312-2	TR 0... 70 °C STB fixed at 75 °C	2 K -20 K				SWK-2-200
KR 85.204-8	TR 50... 130 °C TB 95... 130 °C	8 K -8 K	RTKSA-013.210	TW: 0... 120 °C TB: 20... 150 °C	3 K -10... -15 K	THK-2-100x17 + JZ-30
KR 85.230-5	TR 35...95 °C TB 95... 110 °C	5 K 5 K				THK-2-100x17 + JZ-30
KR 85.207-5	TR 35...95 °C TB 85... 120 °C	5 K -8 K				THK-2-200x17 + JZ-30

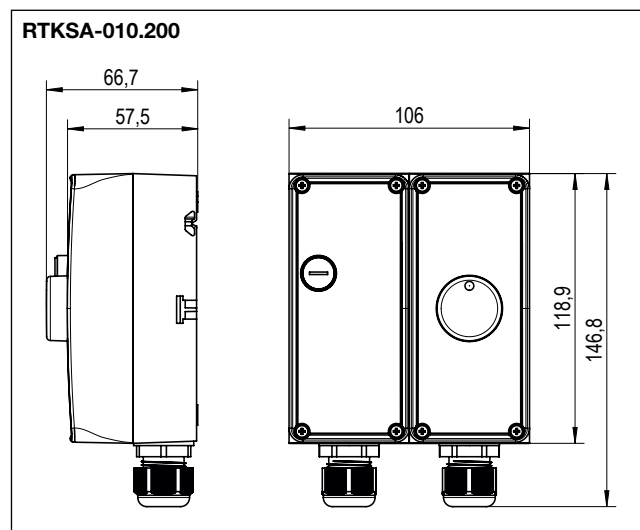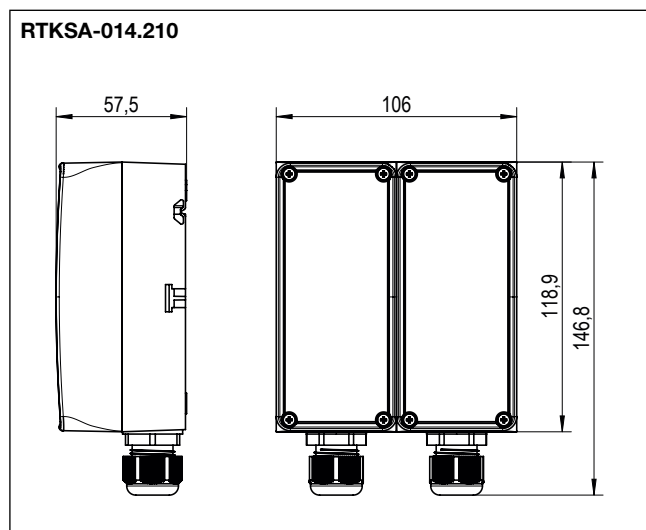


Universal capillary double thermostat RTKSA


Capillary system – TÜV-tested

NEW


RTKSA-013.210

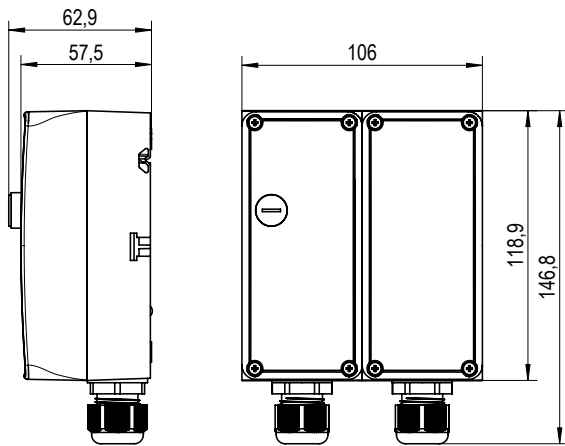


NEW Scan the QR code now and watch the "New thermostats in plant engineering" product film. More information at a glance.



RTKSA-010.200/RTKSA-013.210

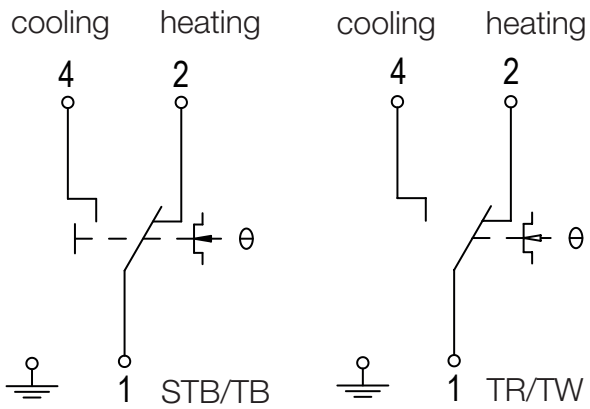

RTKSA-014.210

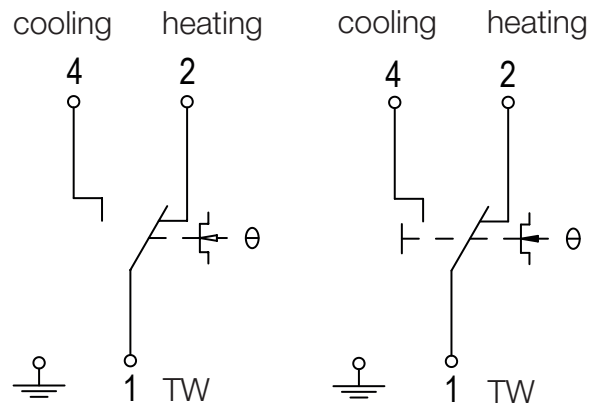

JZ-30



Single-stage plant room thermostats JET-110/-120

Capillary system – External sensors – Configurable hysteresis



Technical data

Colour:	grey (lower part like RAL 7016, upper part like RAL 7035)
Permissible atmospheric humidity:	Max. 95% rel. humidity, non-condensing
Operating voltage:	none
Max. switching current:	15 (8) A
Min. switching current:	150 mA
Max. switching voltage:	230 VAC, 50 Hz
Min. switching voltage:	24 VAC, 50 Hz
Switching element:	microswitch
Switching contact:	toggler, potential-free
Control function:	heating or cooling
Electrical connection:	screw-type terminals
Mounting/attachment:	wall mounting
Protection class:	I
Protection rating:	IP 65
Safety and EMC:	according to DIN EN 60730
Sensor:	liquid-filled capillary
Sensor material:	Cu
General features:	Scale: degrees Celsius

Application



Control or monitoring of the temperature in the industrial domain in a non-aggressive environment, for example, for controlling heating or cooling systems in greenhouses, industrial and sports halls, air-inflated domes, cold storage and refrigeration rooms.

The JET-110 RF is particularly suitable as an external thermostat.

For successor types for JET-4x and JET-4x F see page 156 (plant room thermostat RTKSA)

Type	Item no.	Control range	Max. sensor temperature	Hysteresis (approx.)	Ambient temperature	Features	PG
JET-110 R	JA045100	-35...+30 °C	35 °C	2...20 K adjustable	-35...+35 °C	External setting with range restriction, TR	II
JET-110 RF	JA045200	-35...+30 °C	35 °C	2...20 K adjustable	-35...+35 °C	Internal setting with viewing window, TW	II
JET-120 R	JA046100	0...60 °C	70 °C	2...20 K adjustable	-35...+70 °C	External setting with range restriction, TR	II
JET-120 RF	JA046200	0...60 °C	70 °C	2...20 K adjustable	-35...+70 °C	Internal setting with viewing window, TW	II

TR = temperature controller, TW = temperature monitor

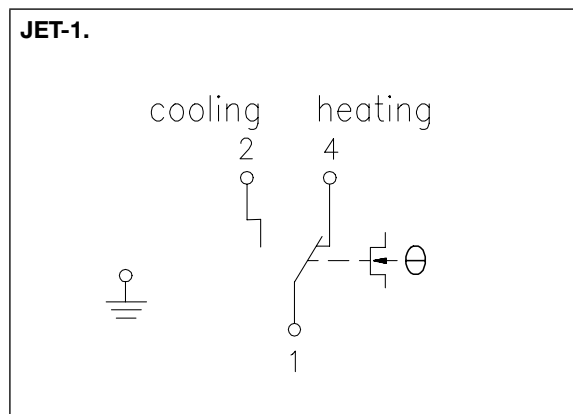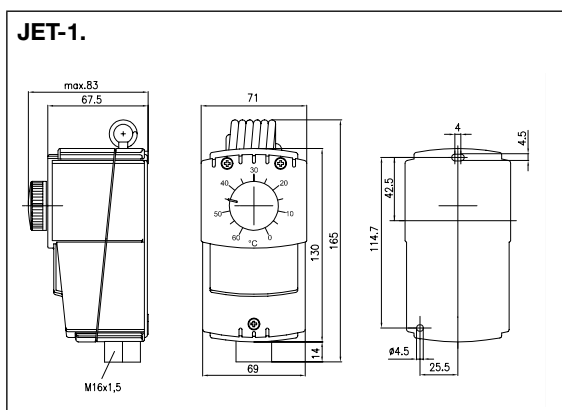

Single-stage capillary thermostats JET-1



Technical data

Housing colour:	grey (lower part like RAL 7016, upper part like RAL 7035)
Sensor material:	Cu (capillaries made from V2A)
Capillary length:	1.8 m (for types with "G" in the type specification: 4.5 m)
Ambient temperature:	-20 ... +55 °C
Max. sensor temperature	top scale value +15%
Permissible atmospheric humidity:	Max. 95% rel. humidity, non-condensing
Operating voltage:	none
Max. switching current:	15 (8) A
Min. switching current:	150 mA
Max. switching voltage:	230 VAC, 50 Hz
Min. switching voltage:	24 VAC, 50 Hz
Switching element:	microswitch
Switching contact:	toggler, potential-free
Electrical connection:	screw-type terminals
Mounting/attachment:	wall mounting
Protection rating:	IP 65
Protection class:	I
Safety and EMC:	according to DIN EN 60730
Sensor:	liquid-filled capillary
General features:	scale: degrees Celsius, mechanical range restriction when external setting is used

Application

Monitoring or control of temperatures of non-aggressive, liquid and gaseous media. Particularly suitable for wall mounting. The SW-200-12 protecting coil is to be used for temperature control of non-aggressive gases in ducts; for temperature control in non-aggressive fluids, use the TH immersion sleeve, and in aggressive fluids, the NTH immersion sleeve.

Immersion sleeves or protection coils are not a part of the scope of delivery (see "Accessories/Miscellaneous" chapter).

Type	Item no.	Control range	Hysteresis adjustable (approx.):	Sensor a x l	Features	PG
JET-110X	JA040100	-35 ... +30 °C	2 ... 20 K	9.6 x 122 mm	external setting/TR*	II
JET-110XF	JA040200	-35 ... +30 °C	2 ... 20 K	9.6 x 122 mm	internal setting/TW*	II
JET-120X	JA041100	0 ... 60 °C	2 ... 20 K	9.6 x 122 mm	external setting/TR*	II
JET-120XG	JA041101	0 ... 60 °C	2 ... 20 K	9.6 x 122 mm	external setting/TR*	II
JET-120XF	JA041200	0 ... 60 °C	2 ... 20 K	9.6 x 122 mm	internal setting/TW*	II
JET-130X	JA042100	40 ... 100 °C	2 ... 20 K	9.6 x 122 mm	external setting/TR*	II
JET-130XG	JA042101	40 ... 100 °C	2 ... 20 K	9.6 x 122 mm	external setting/TR*	II
JET-130XF	JA042200	40 ... 100 °C	2 ... 20 K	9.6 x 122 mm	internal setting/TW*	II
JET-133X	JA042300	40 ... 100 °C		9.6 x 122 mm	external setting/TB**	II
JET-133XF	JA042400	40 ... 100 °C		9.6 x 122 mm	internal setting/TB**	II
JET-140X	JA043100	70 ... 130 °C	2 ... 20 K	9.6 x 122 mm	external setting/TR*	II
JET-140XF	JA043200	70 ... 130 °C	2 ... 20 K	9.6 x 122 mm	internal setting/TW*	II
JET-143XF	JA043400	70 ... 130 °C		9.6 x 122 mm	internal setting/TB**	II
JET-150	JA044100	100 ... 280 °C	8 ... 50 K	6 x 80 mm	external setting/TR*	II
JET-150F	JA044200	100 ... 280 °C	8 ... 50 K	6 x 80 mm	internal setting/TW*	II
JET-153	JA044300	100 ... 280 °C		6 x 80 mm	external setting/TB**	II
JET-153F	JA044400	100 ... 280 °C		6 x 80 mm	internal setting/TB**	II

TR = temperature controller, TW = temperature monitor, TB = temperature limiter

* Control function heating or cooling

** Control function heating or cooling, locks when temperature rises, manual reset after temperature fall of at least 8 K

Accessories

Immersion sleeves for types with "X" in the type specification: TH/NTH-140 see page 220

Immersion sleeves for types without "X" in the type specification: TH/NTH-100/200/280 see page 220

Protection coil for all types: SW-200-12 see page 218-219

Single-stage capillary thermostats JET-1


Temperature monitor (TW)




Temperature limiter (TB)




Temperature controller (TR)

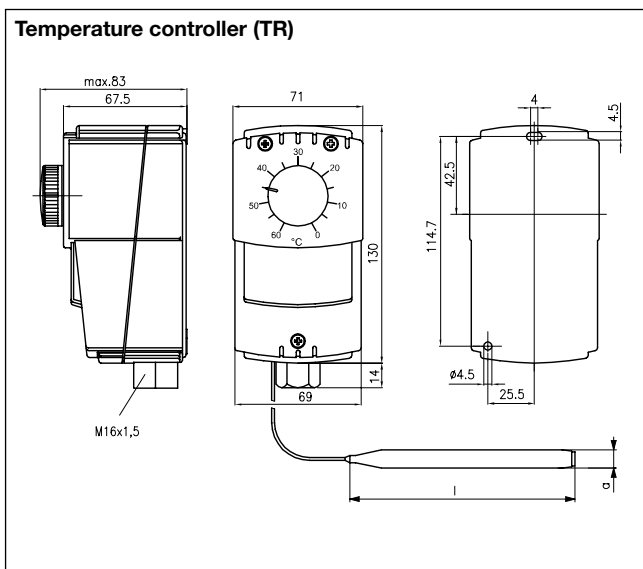

TR/TW

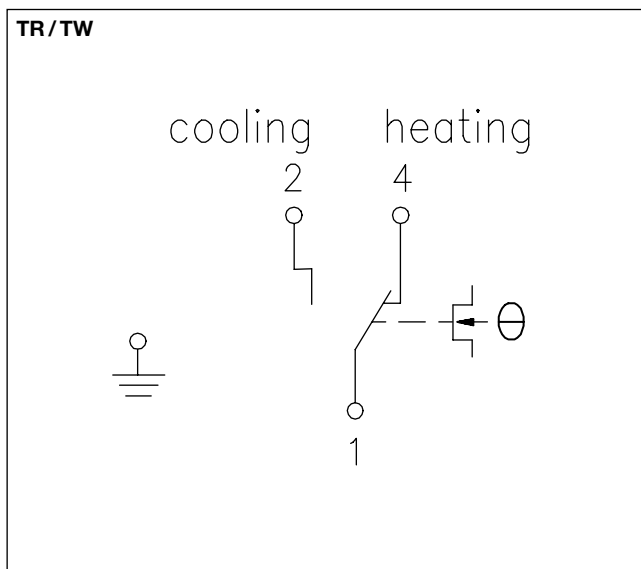

TB

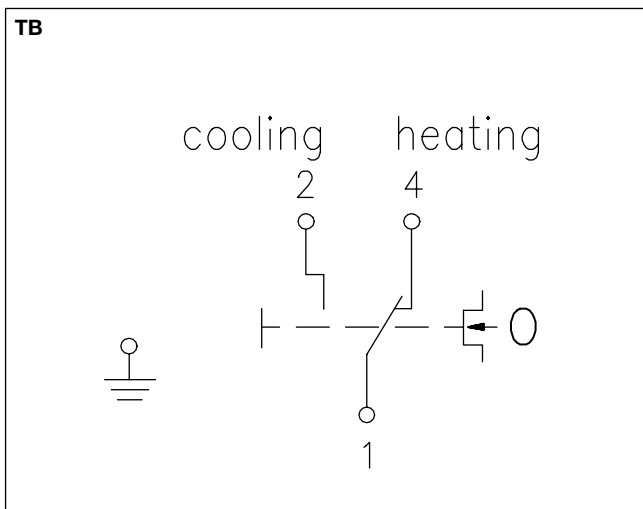

Multi-stage capillary thermostat JMT-206 X

2 stages



Technical data

Housing colour:	grey (lower part like RAL 7016, upper part like RAL 7035)
Sensor material:	Cu
Capillary length:	1.5 m
Ambient temperature:	-15 ... +55 °C
Max. sensor temperature	top scale value +15%
Permissible atmospheric humidity:	Max. 95% rel. humidity, non-condensing
Operating voltage:	none
Max. switching current:	15 (8) A
Min. switching current:	150 mA
Max. switching voltage:	230 VAC, 50 Hz
Min. switching voltage:	24 VAC, 50 Hz
Switching element:	microswitch
Switching contact:	2 x togglers, potential-free
Control function:	2-stage heating, 2-stage cooling, heating or cooling with neutral zone approx. 1 ... 7 K, adjustable
Hysteresis between the stages:	
Electrical connection:	screw-type terminals
Mounting/attachment:	wall mounting
Protection rating:	IP 65
Protection class:	I
Safety and EMC:	according to DIN EN 60730
Sensor:	liquid-filled capillary
General features:	Scale: degrees Celsius

Application

Multi-stage control of the temperature of liquid or gaseous media, e.g., for activating two-stage burners or heating registers.

The SW-200-12 protecting coil is to be used for temperature control of non-aggressive gases in ducts; for temperature control in non-aggressive fluids, use the TH immersion sleeve, and in aggressive fluids, the NTH immersion sleeve.



Immersion sleeves or protection coils are not a part of the scope of delivery (see "Accessories/Miscellaneous" chapter).

Type	Item no.	Control range	Hysteresis in the stage (approx.):	Sensor a x l (mm)	Features	PG
JMT-206 X	E6060340	20 ... 80 °C	1 K	9.6 x 122 mm	External setting, TR	II

TR = Temperature controller

Accessories

Immersion sleeves TH-140/NTH-140 (see page 220), protection coil SW-200-12 (see page 218-219)

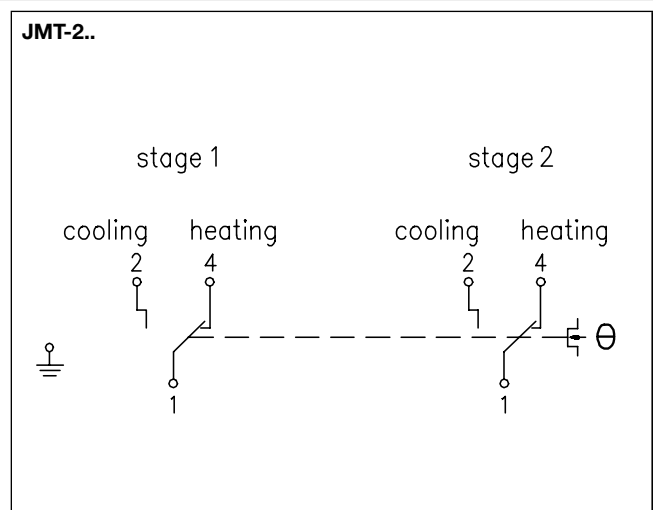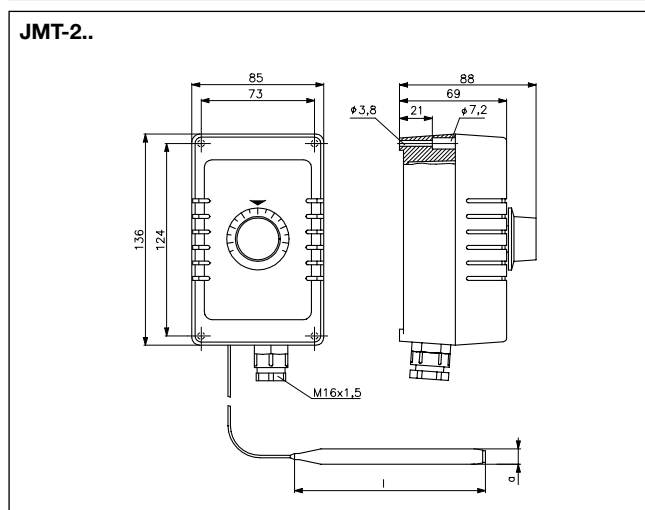

Contact thermostats ATR 83

Capillary system



Technical data

Housing colour:	grey (lower part like RAL 7016, upper part like RAL 7035)
Sensor material:	Cu
Ambient temperature:	0 ... 80 °C
Permissible atmospheric humidity:	Max. 95% rel. humidity, non-condensing
Operating voltage:	none
Max. switching current:	16 (2) A
Min. switching current:	150 mA
Max. switching voltage:	230 VAC, 50 Hz
Min. switching voltage:	24 VAC, 50 Hz
Switching element:	microswitch
Switching contact:	toggler, potential-free
Control function:	heating or cooling
Hysteresis:	Approx. 4 K
Electrical connection:	screw-type terminals
Mounting/attachment:	On pipe by means of a cable tie (450 x 8.9 mm, easy to remove, heat-resistant up to 105 °C)
Protection class:	I
Safety and EMC:	according to DIN EN 60730
Sensor:	liquid-filled capillary
General features:	Scale: degrees Celsius
Scope of delivery:	Controller, cable ties



Application

Control or monitoring of temperatures at heat registers, pipelines or tanks, for example, temperature-dependent pump control or control of motor valves.

Type	Item no.	Control range	Max. sensor temperature	Features	PG
ATR 83.000	C1810492	30 ... 90 °C	100 °C	external setting, TR, IP 20	II
ATR 83.100	C1810493	30 ... 90 °C	100 °C	internal setting, TW, IP 20	II
ATR 83.001	C1810494	0 ... 60 °C	80 °C	external setting, TR, IP 20	II
ATR 83.101	C1810495	0 ... 60 °C	80 °C	internal setting, TW, IP 20	II

TR = temperature controller, TW = temperature monitor

Accessories	Item no.	Features	PG
ATRS-1	C1809518	Temperature determination set for ATR with external setting (ATR 83.000, ATR 83.001)	II
WP-01	G9990180	heat conduction paste 2 ml	II

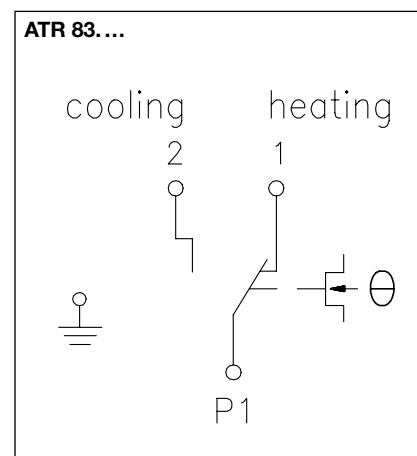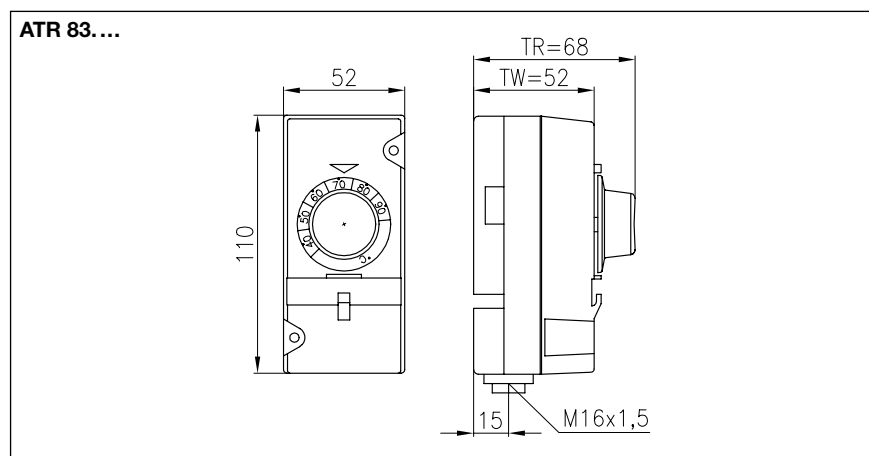

Frost protection thermostat RTKSA

Capillary system – TÜV-tested



Technical data	Application
----------------	-------------

Colour:	Anthracite grey (similar to RAL 7016), front side transparent
Sensor material:	Cu
Max. sensor temperature	120 °C
Max. head temperature:	80 °C
Permissible atmospheric humidity:	Max. 95% rel. humidity, non-condensing
Operating voltage:	none
Max. switching current:	NC contact: 16 (2.5) A at 230 VAC +10% 0.25 A at 230 VDC +10% NO contact STW: 6.3 (2.5) A at 230 VAC +10% 0.25 A at 230 VDC +10% NO contact STB: 2.0 (0.4) A at 230 VAC +10% 0.25 A at 230 VDC +10%
Min. switching current:	Min. 100 mA at 24 V (AC/DC)
Max. switching voltage:	230 VAC 50/60 Hz, 230 VDC
Min. switching voltage:	24 VAC/50 Hz, 24 VDC
Switching element:	microswitch
Switching contact:	toggler, potential-free
Control range:	-10 ... +15 °C
Electrical connection:	Push-in terminals
Mounting/attachment:	Wall mounting; controller housing must be fitted in such a way that the ambient temperature is at least 2 K higher than the setpoint.
Protection class:	I (including switch head and Cu capillary up to 4000 mm)
Safety and EMC:	In accordance with DIN EN 60730 (VDE 0631)
Sensor:	Liquid-filled capillary, active over its entire length (except RTKSA-203.000, RTKSA-204.000, RTKSA-204.020)
General features:	Scale: degrees Celsius

The RTKSA frost protection thermostat was designed especially for ensuring air or water-exposed frost protection for hot-water heating coils and heat exchangers in ventilation, heating or air conditioning systems. The capillaries, except RTKSA-203.000/RTKSA-204.000/RTKSA-204.020, are active along their entire length. The device actuates when the minimum response length of the capillary (at 3 m: 15 cm, at 6 m: 30 cm, at 12 m: 40 cm) reaches the set scale value.

If a sensor rupture occurs, contact 1–2 is permanently opened and contact 1–4 is permanently closed in the STB/STW application. Unlocking is no longer possible with STB.

Air-exposed application:
For the frost protection of heating coils (except RTKSA-203.000/RTKSA-204.000/RTKSA-204.020) the capillaries are braced in front of the heating coil to be protected using mounting brackets. Mounting brackets JZ-05/6 M (metal) or JZ-05/6 K (plastic) should be used for this purpose.

The RTKSA-203.000/RTKSA-204.000/RTKSA-204.020 types can be used in conjunction with the SWK-2-xxx protection coils to measure the temperature of non-aggressive gases in the duct.

Water-exposed application:
The RTKSA-203.000/RTKSA-204.000/RTKSA-204.020 types can be used in conjunction with the THK-2-xxx immersion sleeves for temperature measurement in non-aggressive fluids and in conjunction with the NTHK-2-xxx immersion sleeves in aggressive fluids.

Note:
Mounting flanges, immersion sleeves and protecting coils are not part of the delivery scope and must be ordered separately as accessories.

Type testing by TÜV in accordance with DIN EN 14597



Frost protection thermostat RTKSA

Capillary system



Type	Item no.	Capillary length	Degree of protection	Hysteresis	Features	PG
RTKSA-203.000	KA020300	1.8 m	IP 40	+3 K*	STB, internal setting, external reset, sensor dimensions: 9.5 x 98 mm, also for use in water-exposed applications	II
RTKSA-203.100	KA020301	3 m	IP 40	+3 K*	STB, internal setting, external reset	II
RTKSA-203.120	KA020302	3 m	IP 65	+3 K*	STB, internal setting, external reset	II
RTKSA-203.200	KA020304	6 m	IP 40	+3 K*	STB, internal setting, external reset	II
RTKSA-203.220	KA020303	6 m	IP 65	+3 K*	STB, internal setting, external reset	II
RTKSA-203.300	KA020305	12 m	IP 40	+3 K*	STB, internal setting, external reset	II
RTKSA-204.000	KA020400	1.8 m	IP 40	1.5 K	STW, internal setting, sensor dimensions: 9.5 x 98 mm, also for use in water-exposed applications	II
RTKSA-204.020	KA020401	1.8 m	IP 65	1.5 K	STW, internal setting, sensor dimensions: 9.5 x 98 mm, also for use in water-exposed applications	II
RTKSA-204.100	KA020402	3 m	IP 40	1.5 K	STW, internal setting	II
RTKSA-204.200	KA020403	6 m	IP 40	1.5 K	STW, internal setting	II
RTKSA-204.220	KA020404	6 m	IP 65	1.5 K	STW, internal setting	II
RTKSA-204.300	KA020405	12 m	IP 40	1.5 K	STW, internal setting	II

STB = safety temperature limiter, STW = safety temperature monitor

*Manual reset after heating by approx. 3 K

Accessories	Item no.	Features	PG
JZ-05/6 K	C1809536	1 set of mounting brackets (6 pieces) for frost protection thermostat RTKSA/JTF, made of plastic (max. 145 °C)	II
JZ-05/6 M	C1809474	1 set of mounting brackets (6 pieces) for frost protection thermostat RTKSA/JTF, made of metal	II
JZ-05/1 M	C1809462	Single mounting bracket for frost protection thermostat RTKSA/JTF, made of metal	II
JZ-29	KA999901	Mounting set for RTKSA THK/NTHK/SWK individual controllers	II
THK-2-100	KA969901	Immersion sleeve for RTKSA-203.000/RTKSA-204.000/RTKSA-204.020, length 100 mm, material nickel-plated brass	II
THK-2-200	KA969903	Immersion sleeve for RTKSA-203.000/RTKSA-204.000/RTKSA-204.020, length 200 mm, material nickel-plated brass	II
NTHK-2-100	KA969906	Immersion sleeve for RTKSA-203.000/RTKSA-204.000/RTKSA-204.020, length 100 mm, material V4A	II
NTHK-2-200	KA969908	Immersion sleeve for RTKSA-203.000/RTKSA-204.000/RTKSA-204.020, length 200 mm, material V4A	II
SWK-2-100	KA989901	Protection coil for RTKSA-203.000/RTKSA-204.000/RTKSA-204.020 to attach capillary in the air duct, length 100 mm, material nickel-plated steel	II
SWK-2-200	KA989903	Protection coil for RTKSA-203.000/RTKSA-204.000/RTKSA-204.020 to attach capillary in the air duct, length 200 mm, material nickel-plated steel	II

Type comparison (old/new type)


Old alre types	Capillary length	General features	New alre types	Capillary length	General features
JTF-101	6 m	Degree of protection: IP 54 Hysteresis: approx. 1 K Control range: -8...+8 °C Tmax sensor: 150 °C	RTKSA-204.200	6 m	Degree of protection: IP 40 Hysteresis: Approx. 1.5 K Control range: -10...+15 °C Tmax sensor: 120 °C
JTF-103	1.8 m		RTKSA-204.000	1.8 m	
JTF-105	3 m		RTKSA-204.100	3 m	
JTF-112	12 m		RTKSA-204.300	12 m	

Frost protection thermostat RTKSA


Capillary system

NEW


RTKSA-203.xxx

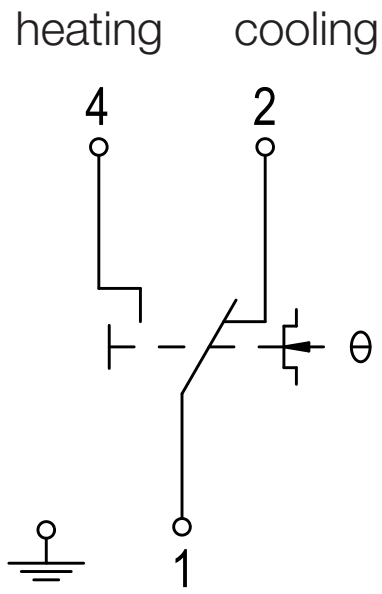


RTKSA-204.xxx

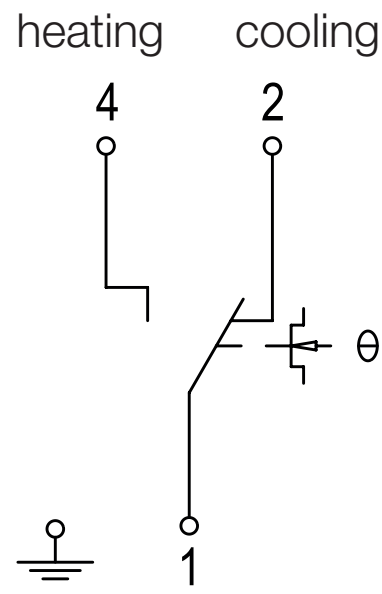

RTKSA-203.xxx

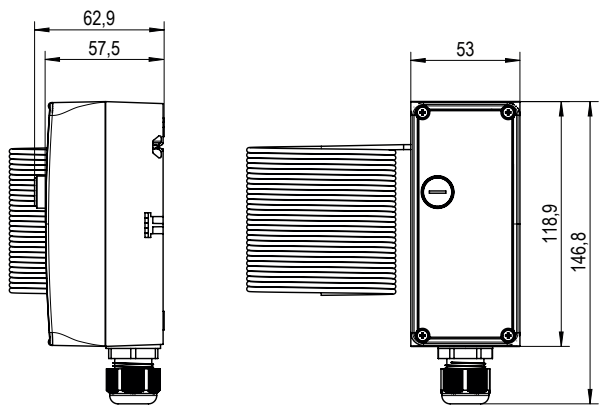

RTKSA-204.xxx

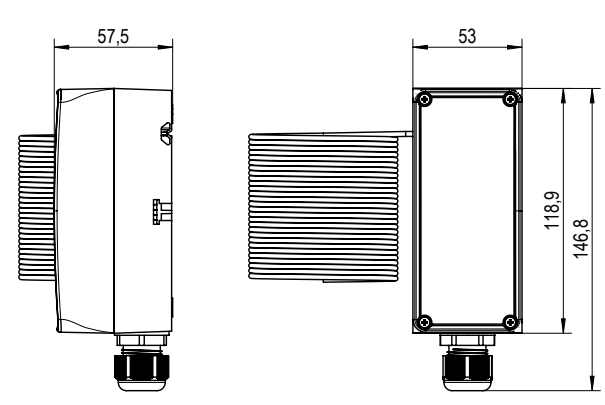

NEW Scan the QR code now and watch the "New thermostats in plant engineering" product film. More information at a glance.



Frost protection thermostat JTF-1 ... -25

Capillary system – 1 or 2 stages – TÜV-tested – switching



Technical data	Application
----------------	-------------

Housing colour: grey
Sensor material: Cu
Ambient temperature: -10... +55 °C
Permissible atmospheric humidity: Max. 95% rel. humidity, non-condensing
Max. sensor temperature: 200 °C
Operating voltage: none
Max. switching current: 15 (8) A
Min. switching current: 150 mA
Max. switching voltage: 230 VAC, 50 Hz
Min. switching voltage: 24 VAC, 50 Hz
Switching element: microswitch
Switching contact: toggler, potential-free
Control range: -10... +12 °C
Electrical connection: screw-type terminals
Mounting/attachment: wall mounting, controller housing must be fitted in such a way that it is not subjected to any temperature that is less than the scale value that has been set
Protection class: I
Safety and EMC: according to DIN EN 60730
Sensor: gas-filled capillary, active over its entire length (except for JTF-3, JTF-3 W und JTF-4)
General features: intrinsic safety, scale: degrees Celsius

Securing hot water registers against freezing. The frost protection thermostats JTF-21 to JTF-25 have two switch outputs that allow for intervention in the system before the critical point is reached. All the devices are intrinsically safe and offer a sealable setpoint configuration.

The capillaries, with the exception of JTF-3/-4, are active over the entire length. The device gets actuated when about 30 cm of the capillary (or approx. 60 cm capillary in the case of 12-m variants) reach the defined value.

JTF-1 to -25:
 For temperature measurement of non-aggressive gases. The mounting brackets JZ-05/6 M (metal) or JZ-05/6 K (plastic) should be used for bracing the capillaries against the heat register.

JTF-3/-4 (additional application):
 The SW-200-12 protecting coil is to be used for temperature measurement of non-aggressive gases in the duct; for temperature measurement in non-aggressive fluids, the TH-140 immersion sleeve is to be used, and in aggressive fluids, the NTH-140 immersion sleeve.



Note:
 Mounting flanges, immersion sleeves and protecting coils are not part of the delivery scope and must be ordered separately as accessories.

Type testing by TÜV in accordance with DIN EN 14597

Type	Item no.	Capillary length	Features	PG
1-stage				
JTF-1 *	E6090301	6 m	external setting, TR, IP 40, hysteresis approx. 1 K	II
JTF-1/12 *	E6090328	12 m	external setting, TR, IP 40, hysteresis approx. 1 K	II
JTF-1 W *	E6090014	6 m	internal setting, TW, IP 65, hysteresis approx. 1 K	II
JTF-2 **	E6090308	6 m	external setting, external reset, TB, IP 40, hysteresis: manual reset after temperature rise of approx. 4 K	II
JTF-2 W**	E6090287	6 m	internal setting, internal reset, TB, IP 65, hysteresis: manual reset after temperature rise of approx. 4 K	II
JTF-3*	E6090309	1.8 m	external setting, TR, IP 40, hysteresis approx. 1 K, sensor dimensions: 9.5 x 76 mm, also for use in applications exposed to water	II
JTF-3 W*	E6090065	1.8 m	internal setting, TW, IP 65, hysteresis approx. 1 K, sensor dimensions: 9.5 x 76 mm, also for use in applications exposed to water	II
JTF-4**	E6090310	1.8 m	external setting, external reset, TB, IP 40, hysteresis: manual reset after temperature rise of approx. 4 K, sensor dimensions: 9.5 x 76 mm, also for use in applications exposed to water	II
JTF-5*	E6090311	3 m	external setting, TR, IP 40, hysteresis approx. 1 K	II

NEW For frost protection thermostats RTKSA see page 172–174.

Frost protection thermostat JTF-1 ... -25

Capillary system – 1 or 2 stages – TÜV-tested – switching

Type	Item no.	Capillary length	Features	PG
2-stage: 1st stage emits a signal 5 K before the switch-off point				
JTF-21 ***	E6090320	6 m	external setting, TR, IP 40, hysteresis in the stage approx. 1 K, hysteresis between the stages approx. 5 K	II
JTF-21 / 12 ***	E6090330	12 m	external setting, TR, IP 40, hysteresis in the stage approx. 1 K, hysteresis between the stages approx. 5 K	II
JTF-21 W ***	E6090283	6 m	internal setting, TW, IP 65, hysteresis in the stage approx. 1K, hysteresis between the stages approx. 5 K	II
JTF-22 ****	E6090322	6 m	external setting, external reset, TB, IP 40, hysteresis in the stage approx. 1 K, hysteresis between the stages approx. 5 K	II
JTF-22 / 12 ****	E6090331	12 m	external setting, external reset, TB, IP 40, hysteresis in the stage approx. 1 K, hysteresis between the stages approx. 5 K	II
JTF-25 ***	E6090324	3 m	external setting, TR, IP 40, hysteresis in the stage approx. 1 K, hysteresis between the stages approx. 5 K	II

TR = temperature controller, TW = temperature monitor, TB = temperature limiter





* Control function heating or cooling

** Control function heating or cooling, locked when the temperature is dropping

*** Control function heating or cooling, 1st stage emits a signal 5 K before the switch-off signal



**** Control function heating or cooling, 1st stage emits a signal 5 K before the switch-off signal, locks at dropping temperature (manual reset after temperature rise of approx. 4 K)

Accessories	Item no.	Features	PG
JZ-04	E6160133	capillary tube leadthrough for air ducts with 30-cm protective hose	II
JZ-05/6 K	C1809536	1 set of mounting brackets (6 pieces) for frost protection thermostat JTF, made of plastic (max. 145 °C)	II
JZ-05/6 M	C1809474	1 set of mounting brackets (6 pieces) for frost protection thermostat JTF, made of metal	II
JZ-05/1 M	C1809462	single mounting bracket for frost protection thermostat JTF, made of metal	II
JZ-07	E6160145	mounting bracket for frost protection thermostat JTF	II
TH-140	C1809409	immersion sleeve for JTF-3, JTF-4; material nickel-plated brass	II
NTH-140	C1809435	immersion sleeve for JTF-3, JTF-4; material V4A (1.4571)	II
SW-200-12	C1809220	protecting coil for JTF-3, JTF-4 to attach capillary in the air duct; made of nickel-plated steel	II

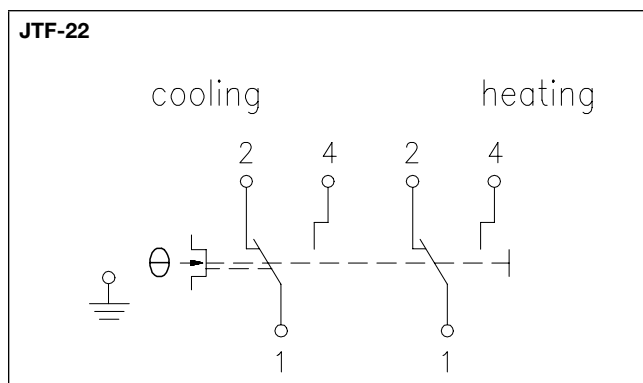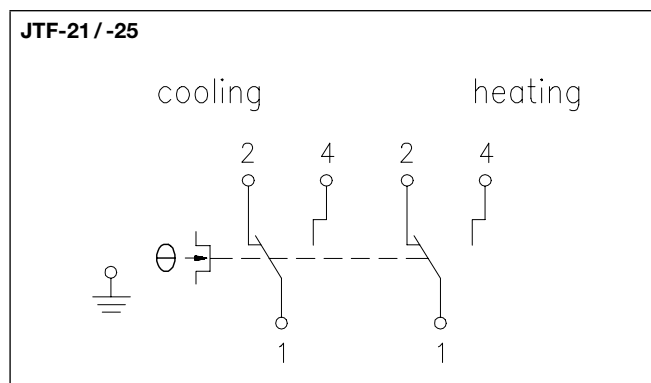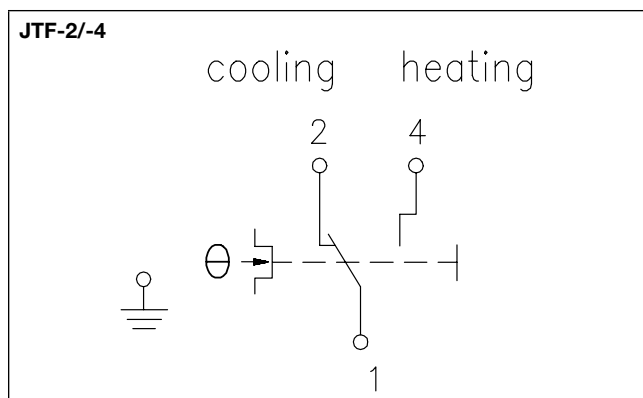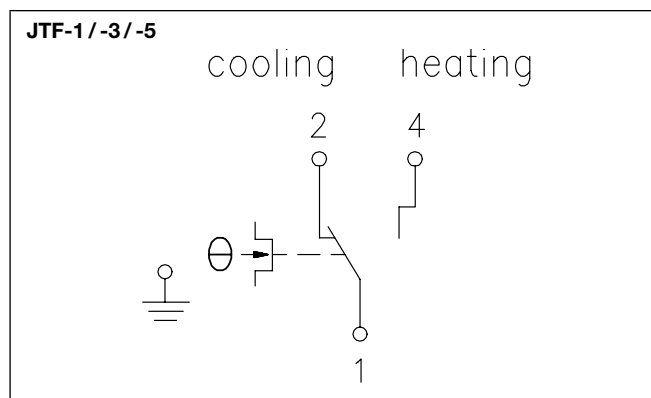

Frost protection thermostat JTF-1 ... -25

Capillary system – 1 or 2 stages – TÜV-tested – switching

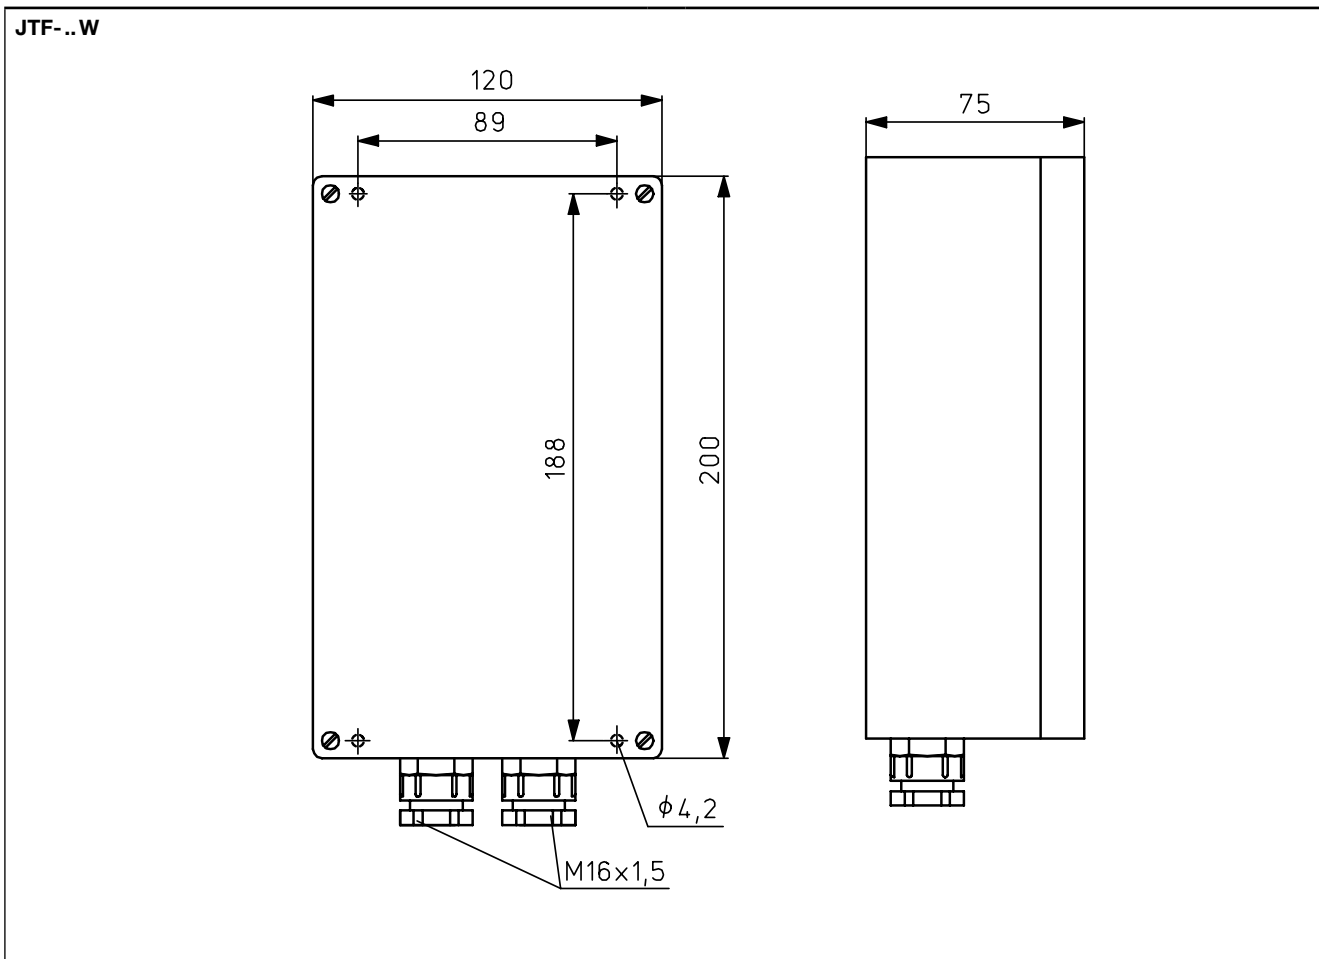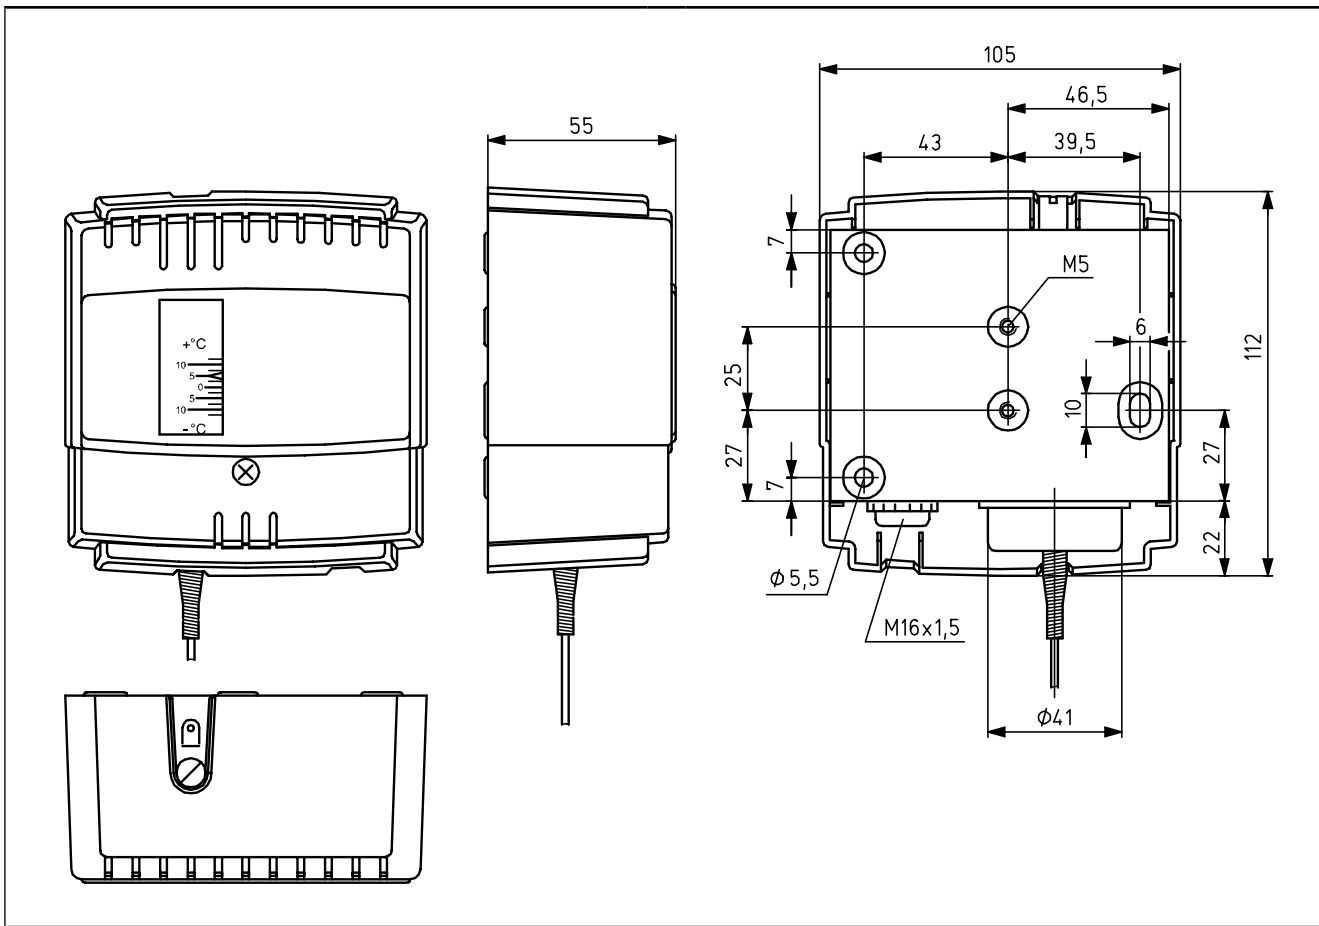

Air heater thermostat JTL-2 ... -11/JTL-8 NR ... -17 NR

Capillary system – 2 functions or 3 functions – TÜV-tested



Technical data

Housing colour:	grey
Sensor material:	Cu
Ambient temperature:	-15 ... +80 °C
Permissible atmospheric humidity:	Max. 95% rel. humidity, non-condensing
Max. sensor temperature	200 °C
Operating voltage:	none
Max. switching current:	15 (8) A
Min. switching current:	150 mA
Max. switching voltage:	230 VAC, 50 Hz
Min. switching voltage:	24 VAC, 50 Hz
Switching element:	microswitch, toggler, potential-free
Control function:	heating or cooling
Control range ventilator:	20 ... 70 °C
Hysteresis of fan:	adjustable approx. 8 ... 30 K
Electrical connection:	screw-type terminals
Mounting / attachment:	mounting on air duct
Protection rating:	IP 20
Protection class:	I
Safety and EMC:	according to DIN EN 60730
Sensor:	liquid-filled capillary, active over its entire length
General features:	intrinsic safety, protection against cold, internal setting, scale: degrees Celsius
Operating elements:	fan switch

Application

Minimum or maximum thermostat for inflow air monitoring and fan regulation in ventilation and air conditioning systems. Overheating protection thermostat for electrical heat registers and directly fired air heaters with oil and gas operation.

The "MAN – AUTO" switch allows the fan to be used for ventilation in summer.

Type ... NR: Temperature-controlled fan regulation, burner monitoring and safety temperature limiter, 3 functions.

Attention: Assemble the device in a vibration-free manner in order to avoid malfunctions and/or sensor rupture.

Type-tested by TÜV according to DIN EN 14597

For hot air heaters in accordance with DIN 4794



Type	Item no.	Control range burner	Hysteresis of burner (approx.)	Capillary length	Features*	PG
JTL-2	E6110013	70 ... 100 °C	8 K	350 mm	TW	II
JTL-8	E6110049	70 ... 100 °C	external reset	350 mm	STB, locked when the temperature is rising, overheating protection	II
JTL-11	E6110064	70 ... 100 °C	8 K	1250 mm	TW	II
JTL-8 NR	E6120038	70 ... 95 °C	8 K	350 mm	locked when the temperature is rising, TW / STB, tolerances: STB +0/-10 K, overheating protection, external reset STB, shut-off temperature STB fixed: 100 °C	II
JTL-17 NR	E6120077	70 ... 95 °C	8 K	1,250 mm	locked when the temperature is rising, TW / STB, tolerances: STB +0/-10 K, overheating protection, external reset STB, shut-off temperature STB fixed: 100 °C	II

* TW = temperature monitor, STB = safety temperature limiter

JTL-4 is replaced by JTL-8.
JTL-4 NR is replaced by JTL-8 NR.






Intrinsic safety/protection against cold: The devices are intrinsically safe, i.e., upon loss of the sensor medium owing to sensor rupture, for example, the burner is switched off. Since minus temperatures generate the same effect through volume reduction of the sensor medium, the devices are adjusted by means of the "cold screw" such that they switch off the burner only at temperatures below -15 °C. They can only be switched on again manually at temperatures above approx. -5 °C by means of the manual reset button.

Overheating protection: This device provides protection from uncontrolled overheating caused, for example, by heat building up or by creeping capillary filling losses when there is invisible damage to the sensor or the capillary tube, etc. Upon reaching a temperature of 220 °C, the safety slot in the sensor melts and, in reaction to losing the filling medium, the device switches off the burner towards the safe side. The burner cannot be switched on again. The device is then unusable and serves as evidence of the presence of an over-temperature of at least 220 °C.

Locking: For types JTL-8, JTL-8 NR and JTL-17 NR, a restart after cooling down is only possible by manual reset.

Air heater thermostat JTL-2 ... -11/JTL-8 NR ... -17 NR

Capillary system – 2 functions or 3 functions – TÜV-tested

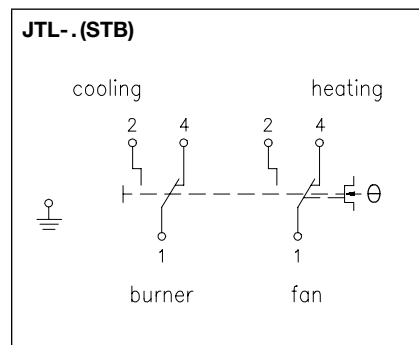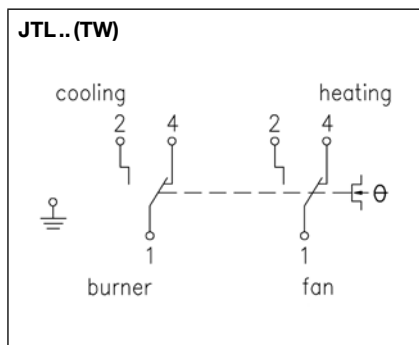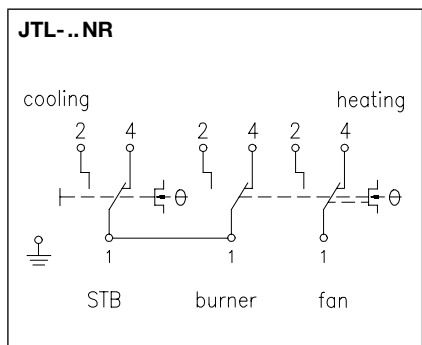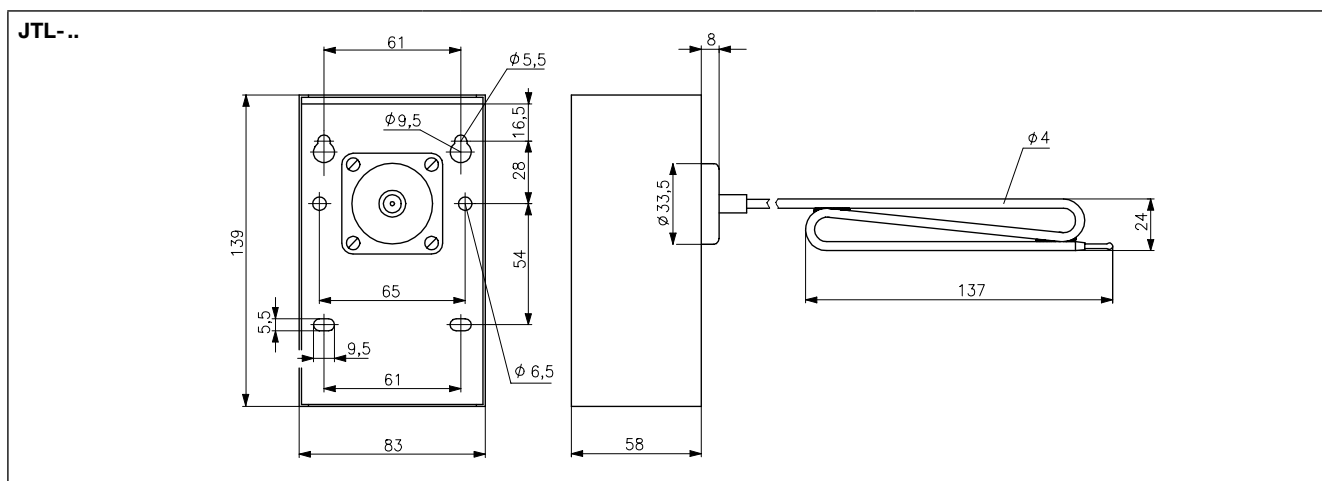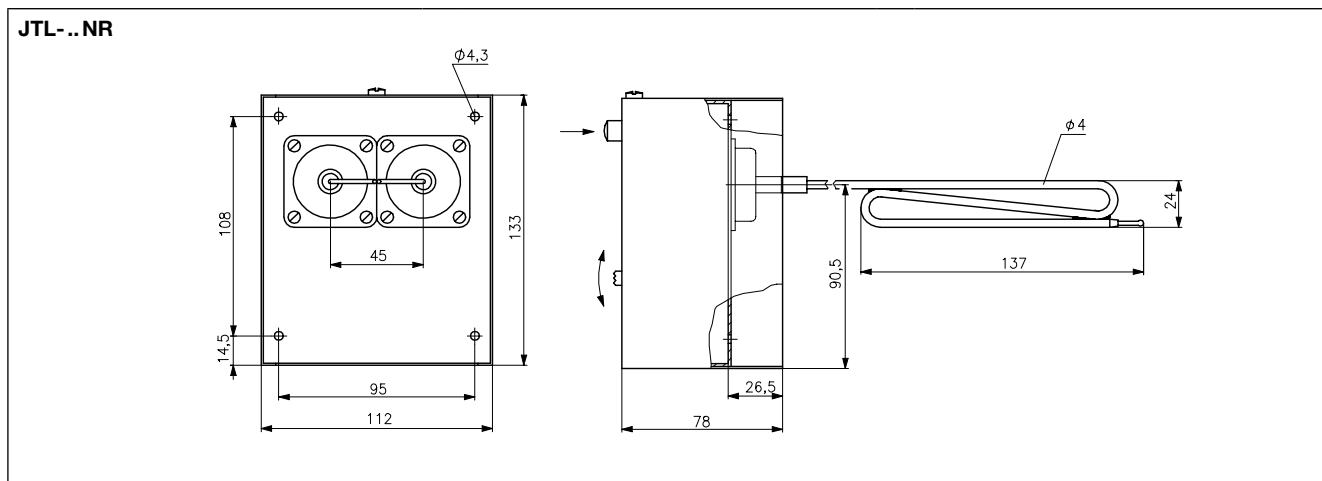

Duct thermostat JTU-1 ... -50

Capillary system – TÜV-tested



Technical data

Housing colour:	grey
Sensor material:	Cu
Ambient temperature:	-15 ... +80 °C
Permissible atmospheric humidity:	Max. 95% rel. humidity, non-condensing
Max. sensor temperature	200 °C
Operating voltage:	none
Max. switching current:	15 (8) A
Min. switching current:	150 mA
Max. switching voltage:	230 VAC, 50 Hz
Min. switching voltage:	24 VAC, 50 Hz
Switching element:	microswitch
Switching contact:	toggler, potential-free
Electrical connection:	screw-type terminals
Mounting/attachment:	mounting on air duct
Protection rating:	IP 40
Protection class:	I
Safety and EMC:	according to DIN EN 60730
Sensor:	liquid-filled capillary, active over its entire length
General features:	internal setting, scale: degrees Celsius

Application

Minimum or maximum thermostat for inflow air monitoring and fan regulation in ventilation and air conditioning systems.

Overheating protection thermostat for electrical heat registers and directly fired air heaters with oil and gas operation.

Attention: Assemble the device in a vibration-free manner in order to avoid malfunctions and/or sensor rupture.

JTU-20, -3:
Type testing by TÜV in accordance with
DIN EN 14597,
for hot air heaters in accordance with
DIN 4794



Type	Item no.	Control range	Hysteresis (approx.)	Capillary length	Features	PG
JTU-50	E6100000	-25 ... +65 °C	1.5 K	350 mm	Control function: heating or cooling, TW	II
JTU-1	E6100012	20 ... 100 °C	8 ... 30 K adjustable	350 mm	Control function: heating or cooling, TW, intrinsic safety, protection against cold	II
JTU-3	E6100036	20 ... 100 °C	external reset	350 mm	Control function: heating or cooling, locked when the temperature is rising, STB, intrinsic safety, protection against cold, overheating protection	II
JTU-20	E6100075	20 ... 100 °C	external reset	1250 mm	Control function: heating or cooling, locked when the temperature is rising, STB, intrinsic safety, protection against cold	II
JTU-5	E6100048	60 ... 140 °C	8 ... 30 K adjustable	350 mm	Control function: heating or cooling, TW	II
JTU-6	E6100051	60 ... 140 °C	external reset	350 mm	Control function: heating or cooling, locked when the temperature is rising, TB	II

TW = temperature monitor, STB = safety temperature limiter, TB = temperature limiter

JTU-2 is replaced by JTU-3.




Intrinsic safety / protection against cold: The devices are intrinsically safe, i.e., upon loss of the sensor medium owing to sensor rupture, for example, the burner is switched off. Since minus temperatures generate the same effect through volume reduction of the sensor medium, the devices are adjusted by means of the "cold screw" such that they switch off the burner only at temperatures below -15 °C. They can only be switched on again manually at temperatures above approx. -5 °C by means of the manual reset button.

Overheating protection: This device provides protection from uncontrolled overheating, which is caused, for example, by a heat build-up or by creeping capillary filling losses when there is invisible damage to the sensor or the capillary tube etc. Upon reaching a temperature of 220 °C, the safety slot in the sensor melts and, in reaction to losing the filling medium, the device switches off the burner towards the safe side. The burner cannot be switched on again. The device is then unusable and serves as evidence of the presence of an over-temperature of at least 220 °C.

Locking: For types JTU-3, JTU-6 and JTU-20, a restart after cooling down is only possible by manual reset.

Duct thermostat JTU-1 ... -50

Capillary system – TÜV-tested

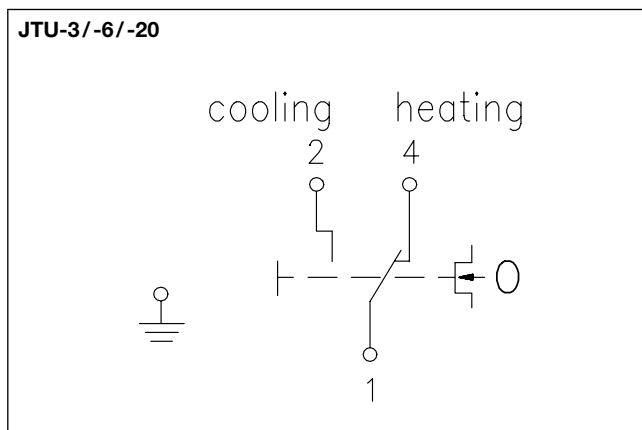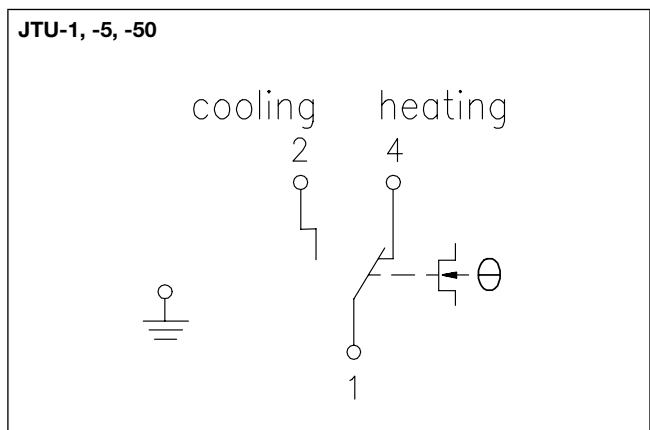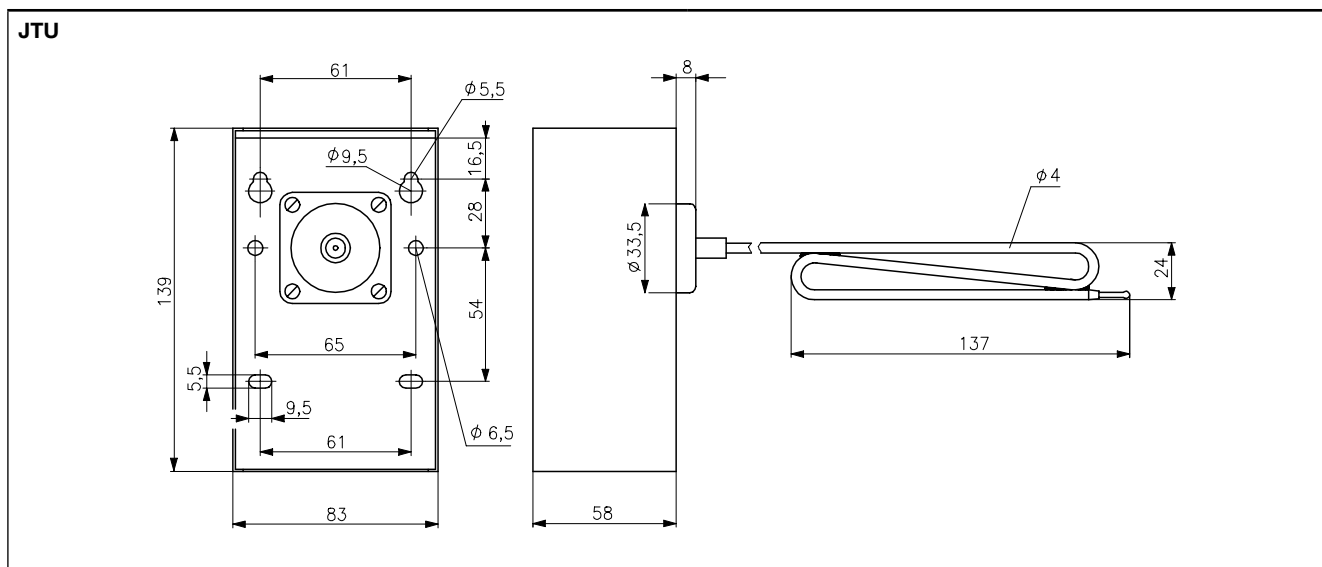

Control cabinet thermostats

mechanical, bimetal







Technical data

Housing colour:	grey, like RAL 7035
Ambient temperature:	0... 60 °C
Permissible atmospheric humidity:	Max. 95% rel. humidity, non-condensing
Max. switching voltage:	230 VAC/50 Hz, 48 VDC
Min. switching voltage:	24 VAC/50 Hz, 24 VDC
Min. switching current:	The resistance of the contact transition results in a voltage drop across the contact. This can have a strong influence on very small switching signals.
Switching element:	bimetallic contact
Hysteresis:	Approx. 4... 7 K (RTBSS-112.211/12) approx. 1 K at operating voltage of 230 VAC) at a temperature change of max. 4 K/h
Electrical connection:	screw-type terminals 0.5 mm ² up to 2.5 mm ²
Mounting/attachment:	on supporting rails (35 mm) according to EN 60715
Protection rating:	IP 30
Protection class:	0, determined by the assembly location
Safety and EMC:	according to DIN EN 60730
Sensor:	bimetal
Function type:	TR (temperature controller)
General features:	external setting, scale: degrees Celsius, snap-lock control button
Test mark/Approbation:	UL, VDE

Application

Application scenarios include temperature monitoring in control cabinets, machines and housings.

Type/image	Item no.	Features	Circuit diagram	PG
	ZN111524	Max. switching current: 10 (2) A/VAC, max. 30 W/ VDC Switching contact: NC contact Control function: heating Control range: 0... 60 °C scale red		II
	ZN112525	Max. switching current: 10 (2) A/VAC, max. 30 W/ VDC Switching contact: NO contact Control function: cooling Control range: 0... 60 °C scale blue		II
	ZN113527	Max. switching current: NC contact 10 (2) A/ VAC, max. 30 W/ VDC NO contact 5 (2) A/ VAC, max. 30 W/ VDC Switching contact: changeover Control function: heating or cooling Control range: 0... 60 °C scale grey		II
	ZN113152	Max. switching current: NC contact 10 (2) A/ VAC, max. 30 W/ VDC NO contact 5 (2) A/ VAC, max. 30 W/ VDC Switching contact: changeover Control function: heating or cooling Control range: 0... 60 °C Scale grey, thermal feedback		II
Accessories	Item no.	Features		PG
JZ-13	ZA990001	standard rail with drilled holes for fastening control cabinet controllers (length 40 mm)		II

See page 183 for dimension diagram (RFHSS/RTBSS)

Control cabinet hygrostats

with changeover contact


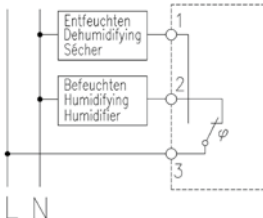


Technical data


Housing colour:	grey, like RAL 7035
Operating voltage:	none
Max. switching current:	De-humidifying: 5 (0.2) A, Humidifying: 2 (0,2) A
Min. switching current:	100 mA at 24 VAC
Max. switching voltage:	230 VAC, 50 Hz
Min. switching voltage:	24 VAC, 50 Hz
Switching element:	microswitch
Switching contact:	changeover
Control function:	humidifying or de-humidifying
Mounting/attachment:	on supporting rails (35 mm) according to EN 60715
Protection rating:	IP 30
Protection class:	0, determined by the assembly location
Safety and EMC:	according to DIN EN 60730
Sensor:	plastic fibres
Function type:	controller
General features:	external setting
Test mark/Approbation:	RFHSS-114.110/01 UL at 230 VAC

Application

Hygrostat for monitoring and controlling humidity in control cabinets and machines

Type/image	Item no.	Features	Circuit diagram	PG
RFHSS-114.110/01 	ZN275001	Ambient temperature: 0... 60 °C Admissible humidity: max. 95% rel. humidity, non-condensing Control range: 40... 90 % rel. humidity Hysteresis: approx. 5% rel. humidity Electrical connection: screw-type terminals 0.5 mm ² to 2.5 mm ² Test mark/approbation: UL for 230 VAC snap-in turning knob		II

Accessories	Item no.	Features	PG
JZ-13	ZA990001	standard rail with drilled holes for fastening control cabinet controllers (length 40 mm)	II

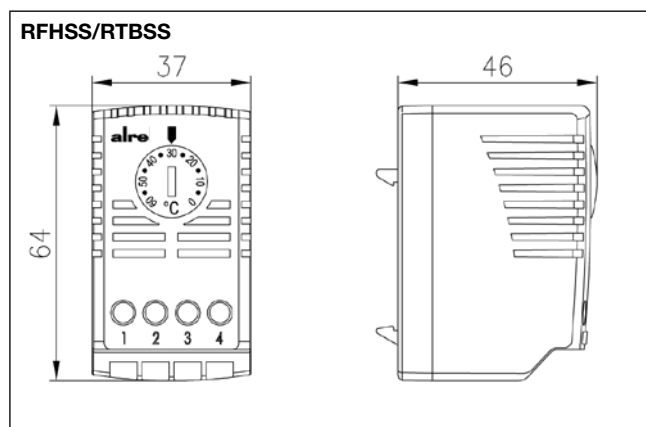

Controller for distributor assembly (hat rail) ITR 79

remote sensor, electronic



Technical data

Housing colour:	grey, like RAL 7035
Ambient temperature:	-10 ... +40 °C
Permissible atmospheric humidity:	Max. 95% rel. humidity, non-condensing
Operating voltage:	230 VAC, 50 Hz
Max. switching current:	NO contact: 10 (2) A, NC contact: 5 (1.5) A
Min. switching current:	The resistance of the contact transition results in a voltage drop across the contact. This can have a strong influence on very small switching signals.
Max. switching voltage:	230 VAC, 50 Hz
Min. switching voltage:	5 VAC, 50 Hz
Switching element:	relay
Switching contact:	toggler, potential-free
Electrical connection:	screw-type terminals up to 2.5 mm ²
Mounting/attachment:	on supporting rails (35 mm) according to EN 60715
Protection rating:	IP 20
Protection class:	II
Safety and EMC:	according to DIN EN 60730
Function type:	TR (temperature controller)
General features:	external setting

Application

Control and monitoring of the temperature in large halls, greenhouses and floor heating systems. The devices have sensor rupture and sensor short-circuit protection.







Sensors are not a part of the delivery scope (except for ITR 79.804) For available sensors, see the 'Sensor Technology' chapter.

Use sensors according to the specified sensor number (for example, for sensor number 4: all sensors with this number can be used, e.g., KF-4). Avoid parallel routing of sensor wires together with mains voltage-bearing wires or use shielded wires.

Type	Item no.	Control range	Features	PG
ITR 79.402	D4780167	-35 ... +15 °C	Control function: heating, hysteresis adjustable: approx. 0.5 ... 5 K, sensor: NTC 1 K (sensor 1), scale: Degrees Celsius, display "heating" red	II
ITR 79.404	D4780155	0 ... 60 °C	Control function: heating, hysteresis adjustable: approx. 0.5 ... 5 K, sensor: NTC 10 K (sensor 4), scale: degrees Celsius, display "heating" red	II
ITR 79.405	D4780181	35 ... 95 °C	Control function: heating, hysteresis adjustable: approx. 0.5 ... 5 K, sensor: NTC 50 K (sensor 5), scale: Degrees Celsius, display "heating" red	II
ITR 79.408	D4780179	-10 ... +40 °C	Control function: heating, hysteresis adjustable: approx. 0.5 ... 5 K, sensor: NTC 8 K (sensor 3), scale: Degrees Celsius, display "heating" red	II
ITR 79.503	D4780524	0 ... 11 °C	Control function: heating, frost protection locked when the temperature is dropping, hysteresis approx. 1.5 K, sensor: NTC 2 K 25 (sensor 0), scale: degrees Celsius, display "heating" red	II
ITR 79.504	D4780371	0 ... 60 °C	Control function: cooling, hysteresis adjustable: approx. 0.5 ... 5 K, sensor: NTC 10 K (sensor 4), scale: Degrees Celsius, display "cooling" green	II
ITR 79.508	D4780369	-10 ... +40 °C	Control function: cooling, hysteresis adjustable: approx. 0.5 ... 5 K, sensor: NTC 8 K (sensor 3), scale: degrees Celsius, display "cooling" green	II
Two setpoint adjusters (e.g. day/night temperature via external clock)				PG
ITR 79.600	D4780508	2 x 5 ... 30 °C	Control function: heating, hysteresis: approx. 0.5 K, sensor: NTC 47 K (sensor 2), ECO contact: toggling between setpoint value 1 and setpoint value 2, scale: degrees Celsius	II
Complete device including remote sensor HF-8/4-K2 (4-m cable)				PG
ITR 79.804	D4780545	0 ... 60 °C	Control function: heating, hysteresis adjustable: approx. 0.5 ... 5 K, sensor: NTC 2 K (sensor 8), multi-digit scale 0 ... 6, display "heating" red	II
Accessories	Item no.	Features		PG
JZ-13	ZA990001	standard rail with drilled holes for fastening control cabinet controllers (length 40 mm)		II

Controller for distributor assembly (hat rail) ITR 79

remote sensor, electronic

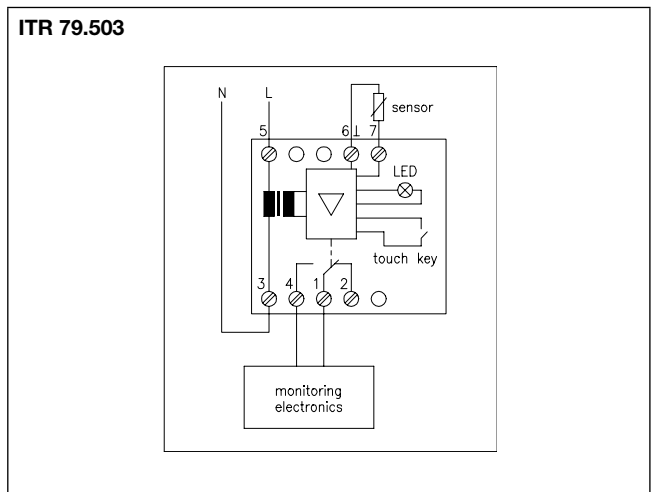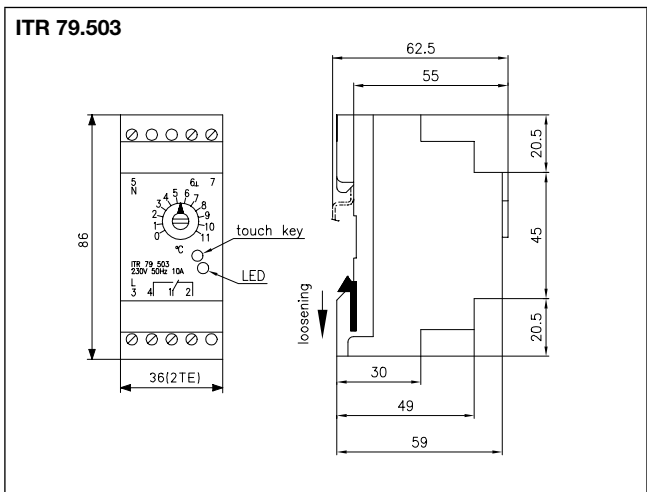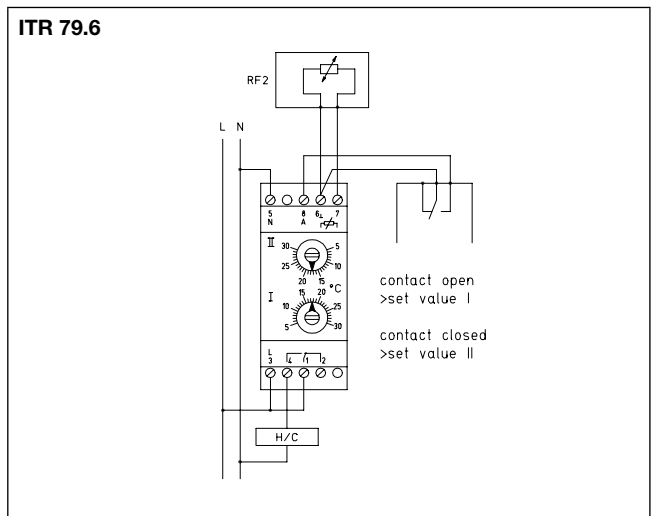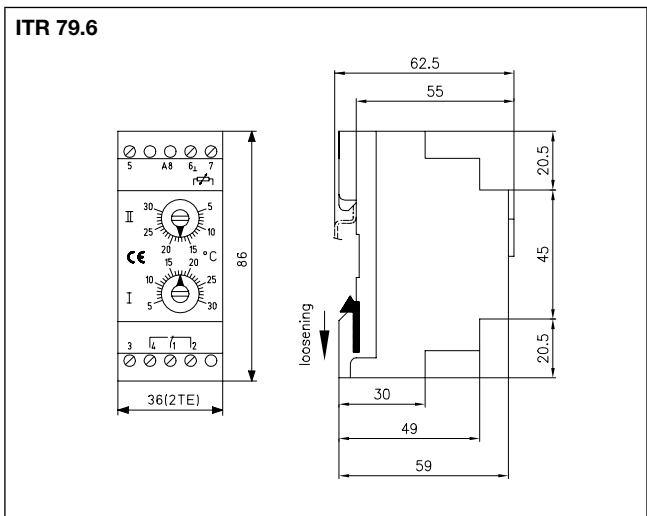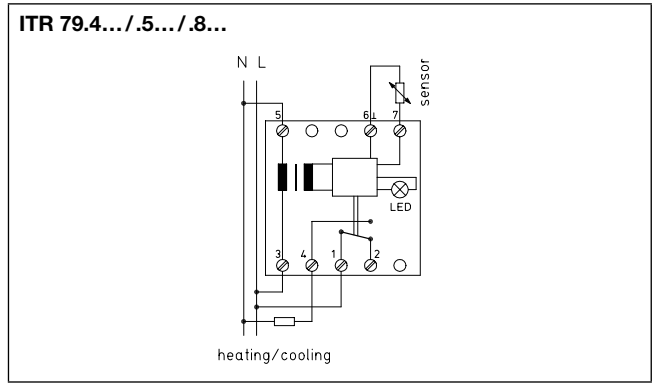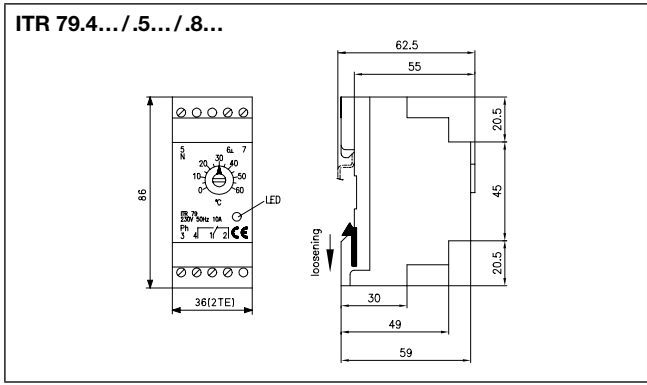

Universal controller ETR 77

remote sensor, electronic



Technical data

Housing colour:	grey (lower part like RAL 7016, upper part like RAL 7035)
Ambient temperature:	-20 ... +50 °C
Permissible atmospheric humidity:	Max. 95% rel. humidity, non-condensing
Operating voltage:	230 VAC, 50 Hz
Max. switching current:	NO contact: 10 (3) A (heating), NC contact: 5 (1.5) A (cooling)
Max. switching voltage:	230 VAC, 50 Hz
Switching element:	relay
Switching contact:	toggler, potential-free
Control function:	heating or cooling
Electrical connection:	screw-type terminals
Mounting/attachment:	wall mounting
Protection class:	II
Sensor:	KTY 81-121 (sensor 51)

Application

Thanks to various sensor models suitable for universal use in heating, ventilation, air-conditioning and refrigeration technology as well as in mechanical and plant engineering.

Sensors are not a part of the delivery scope



For available sensors, see below or the "Sensors" section.

Note: The sensor line is to be routed in a protective duct. Parallel routing together with lines that carry AC voltage is not permissible.

Safety and EMC: according to DIN EN 60730

Type	Item no.	Control range	Features	Hysteresis adjustable	PG
ETR 77.008-5	D4770014	-50 ... +50 °C	IP 65, TW, internal setting, scale: degrees Celsius	0.5 ... 5 K	II
ETR 77.009-5	D4770026	0 ... 100 °C	IP 65, TW, internal setting, scale: degrees Celsius	0.5 ... 5 K	II

TW = Temperature monitor

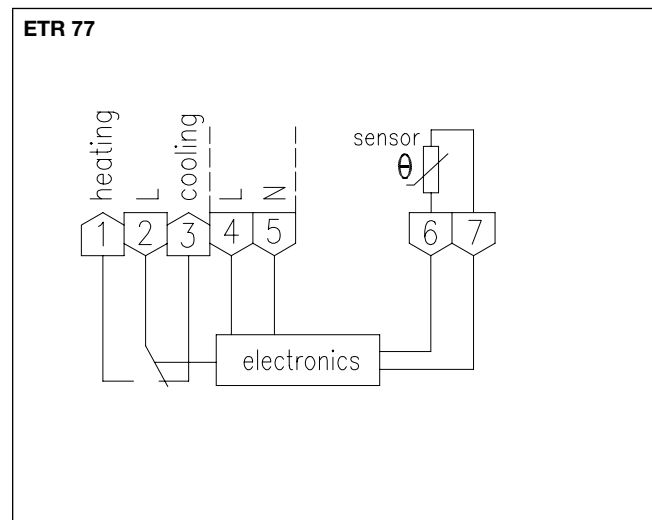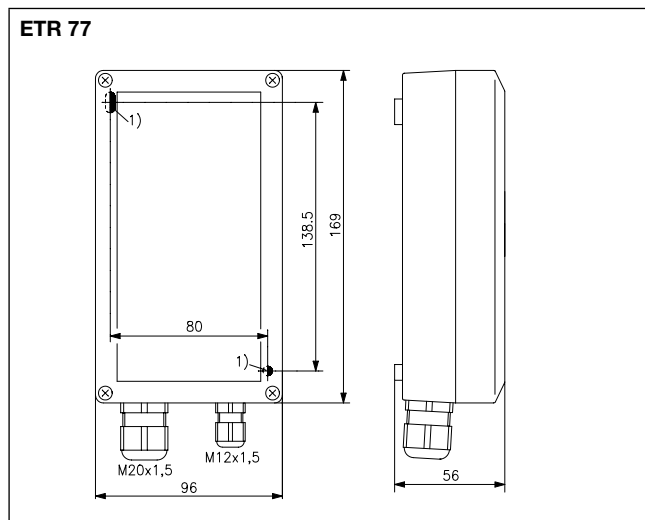

Accessories	Item no.	Features	PG
AF-51	G9040420	external temperature sensor	III
ALF-51	G9050210	contact temperature sensor	III
BTF2-Y81 / 121-0000	SA140017	room temperature sensor, surface-mounted	III
FUFY-81 / 121-0000	SN090201	room temperature controller, flush-mounted	III
KF-51	G9031452	Cable temperature sensor with 1.5 m silicone cable	III
KF-51/6	G9031453	Cable temperature sensor with 6 m silicone cable	III
STF-51	SN080500	radiation temperature sensor	III

Mechanical hygrostats

Duct assembly






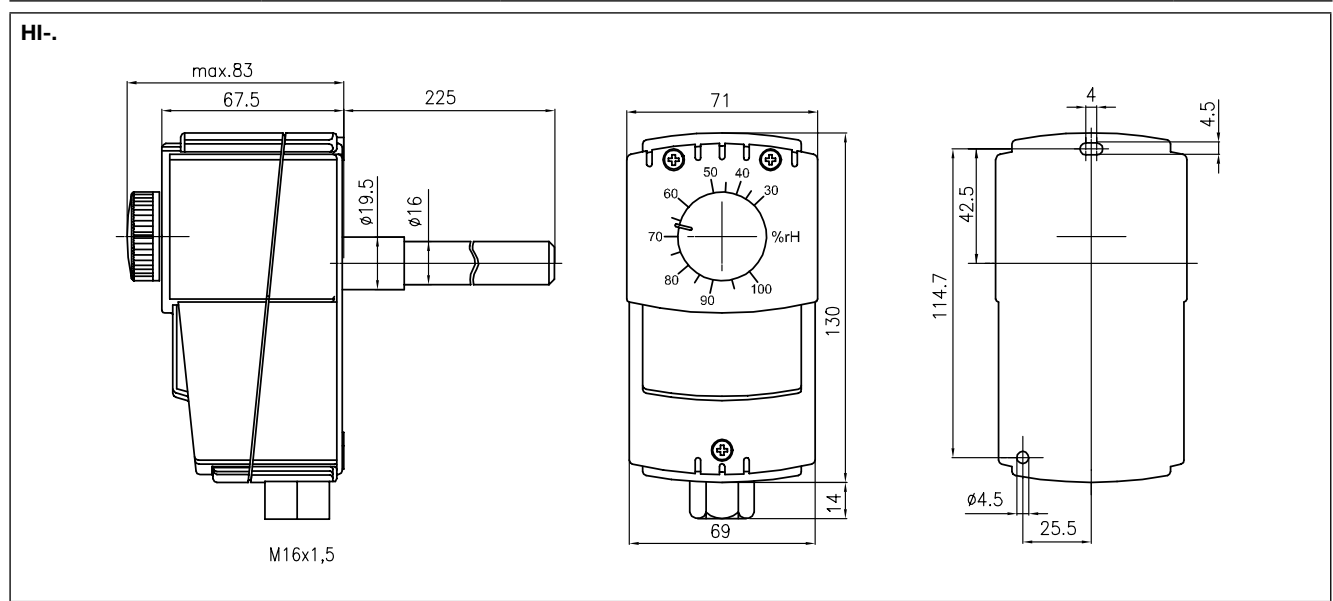
Technical data		Application
Housing colour:	grey (lower part like RAL 7016, upper part like RAL 7035)	Use in ventilation and air-conditioning ducts, climate exposure cabinets and dehumidifiers for controlling and/or monitoring the atmospheric humidity in industrial and agricultural applications. Not suitable for aggressive gases. Max. air speed 8 m/s, with sensor protection FS-HI 15 m/s.
Ambient temperature:	0 ... 60 °C	
Permissible atmospheric humidity:	non-condensing	
Operating voltage:	none	
Max. switching current:	15 (8) A	
Min. switching current:	150 mA at 125 VAC	
Max. switching voltage:	230 VAC, 50 Hz (> 24 V only in dry surroundings)	
Min. switching voltage:	24 VAC, 50 Hz	
Switching element:	microswitch	
Switching contact:	toggler, potential-free	
Control range:	30 ... 100% rel. humidity	
Hysteresis:	approx. 5% rel. humidity	
Tolerances:	> 50%: +/- 3.5% relative humidity < 50%: +/- 4% relative humidity	
Electrical connection:	screw-type terminals	
Mounting/attachment:	mounting on air duct or wall mounting using accessory JZ-20-1	
Protection rating:	IP 65 front-side	
Protection class:	II	
Safety and EMC:	according to DIN EN 60730	
Sensor:	plastic fibres	

Type/image	Item no.	Features	Circuit diagram	PG
	JA010100	Control function: humidifying or de-humidifying Function type: controller external setting, mechanical range setting		II
	JA010200	Control function: humidifying or de-humidifying Function type: monitor Internal setting		II
	JA010300	Control function: 2 x humidifying or de-humidifying Hysteresis between the stages: adjustable 3 ... 15% rel. humidity Function type: controller external setting, mechanical range setting		II

Mechanical hygrostats

Duct assembly

Accessories/options	Item no.	Features	PG
JZ-20-1	E6130144	Wall bracket for HI	II
			
FS-HI	H530975	Sensor protection for HI: finely woven mesh wire, for use at high air speeds of over 8 m/s	II
			
FS2-HI	H531011	PTFE filter for HI: fine sensor protection against dust and contamination	II
			



Wind indicator relay JSL-1E

mechanical



Technical data

Housing colour:	grey (lower part like RAL 7016, upper part like RAL 7035)
Ambient temperature:	-40...+80 °C
Permissible atmospheric humidity:	Max. 95% rel. humidity, non-condensing
Max. medium temperature:	85 °C
Operating voltage:	none
Max. switching current:	15 (8) A
Min. switching current:	150 mA at 24 VAC
Max. switching voltage:	230 VAC, 50 Hz
Min. switching voltage:	24 VAC, 50 Hz
Switching element:	microswitch
Switching contact:	toggler, potential-free
Control function:	airflow monitoring
Hysteresis:	approx. 1 m/s
Electrical connection:	screw-type terminals
Mounting/attachment:	mounting on air duct
Protection rating:	IP 65 housing side, IP 20 medium side
Protection class:	I
Safety and EMC:	according to DIN EN 60730
Sensor:	wind indicator
Material of lug:	V2A (1.4301)
Material of lever:	brass
Function type:	monitor
General features:	Internal setting



Application

Monitoring of air flows in ducts, in air supply and air exhausting devices of fans or electrical heat registers.

The wind indicator relay is set to the minimum switching points at the factory. The switch-on/switch-off values can be increased by turning the inner screw clockwise. Fitting is done in the vertical paddle position from the top in a horizontal pipe/duct.

Type	Item no.	Min. switch-on value	Min. switch-off value	Max. switch-on value	Max. switch-off value	PG
JSL-1E	JA070100	2 m/s	1 m/s	9.2 m/s	8 m/s	II

Type	Item no.	Features	PG
JZ-08	E6150031	spare vane for JSL-1E	II

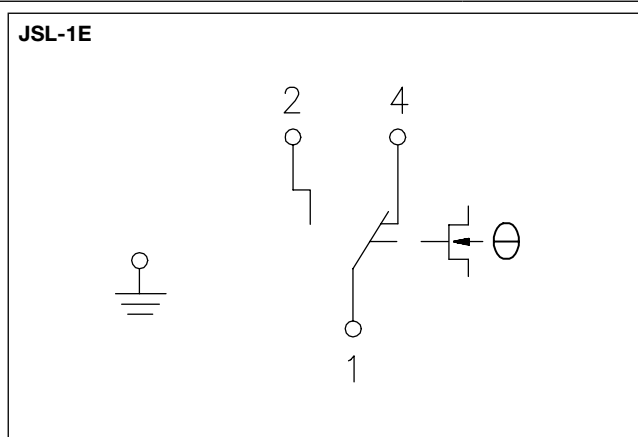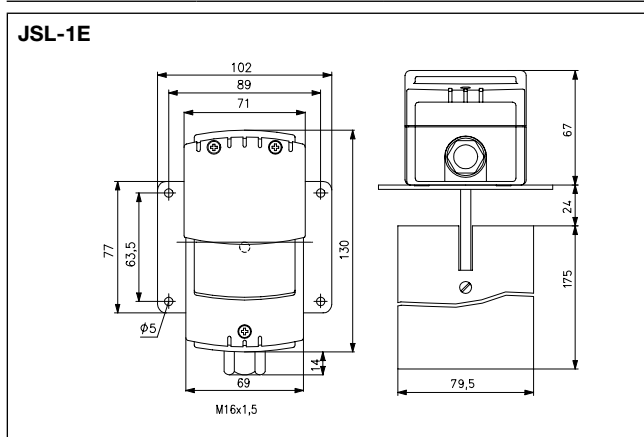

Mounting: The device can be mounted in any alignment, but attention must be paid to the correct direction of flow. When fitting in a vertical duct, the weight of the vane must be balanced at the range screw, which results in changed switching values. Attention: Owing to the changed switching values, at flows near the minimum set value the wind indication relay may not function properly! At air speeds higher than 5 m/s, owing to the danger of breakage, the vane must be cut on the sides where indicated. This increases the minimum switch-off value set at the factory from 1 m/s to 2.5 m/s. A calming path that is 5 times the duct diameter must be provided before and after the assembly location. The scope of delivery includes a seal to be fitted between the duct and the device.

Function: The devices are set to the minimum switch-off value at the factory. A higher value can be selected by turning the range screw to the right. If the flow exceeds the value that has been set, contacts 1-2 close and the corresponding assembly is enabled. If the flow drops below the value that has been set, contacts 1-2 open and contacts 1-4 close.

Differential pressure switches JDW-3 to 10 / JDL-111 ... 116

JDW-3



JDL-111



JDL-112



Technical data

Housing colour:	black
Ambient temperature:	-15 ... +80 °C
Permissible atmospheric humidity:	Max. 95% rel. humidity, non-condensing
Max. sensor temperature:	80 °C
Permissible medium temperature:	-15 ... +80 °C
Operating voltage:	none
Min. switching current:	1 mA
Max. switching voltage:	230 VAC/50 Hz, 24 VDC
Min. switching voltage:	12 VAC/50 Hz, 12 VDC
Switching element:	microswitch
Switching contact:	toggler, gold contact, potential-free
Control function:	switches if the pressure is undershot or exceeded
Pressure connection:	6.2 mm
Mounting/attachment:	wall mounting
Electrical connection:	screw-type terminals
Protection class:	II
Protection rating:	IP 54
Safety and EMC:	according to DIN EN 60730
Sensor:	pressure membrane
Function type:	monitor (JDL-116 A controller)

Application

Monitoring of overpressure, differential or under-pressure of air and incombustible, non-aggressive gases. Exhaust or fan monitoring or flow monitor for securing electrical heat registers, as filter monitoring, air pressure shortage safeguard, limit value controller.

JDW-...: Supplied without mounting bracket; can be screwed on directly (with 2 screws).

JDW-...Z: Supplied with attached mounting bracket JZ-10.

JDL ...: Supplied with attached mounting bracket JZ-10.

Note: Once the differential pressure switch has connected a voltage > 24 V and a current > 0.1 A, the gold layer at the contacts will have burnt away. Thereafter, the differential pressure switch can only be operated at this or a higher power.

Note: The hose set is not a part of the delivery scope and must be ordered separately.






Conversion table pressure

	Pa	kPa	bar	mbar	mmWs
1 Pa =	1	0.001	0.00001	0.01	0.101971
1 kPa =	1,000	1	0.01	10	101.971
1 bar =	100,000	100	1	1,000	10197.1
1 mbar =	100	0.1	0.001	1	10.1971
1 mmWs =	9.80665	0.00980665	0.0000980665	0.0980665	1

Type	Item no.	Control range	Max. pressure	Hysteresis (dependent on setting range)	Features	PG
JDW-3	H531002	20 ... 330 Pa	5,000 Pa	approx. 8 ... 20 Pa	Max. switching current: 1.5 (0.4) AAC, 1 (0.2) ADC Internal setting	II
JDW-3 Z	H531001	20 ... 330 Pa	5,000 Pa	approx. 8 ... 20 Pa	Max. switching current: 1.5 (0.4) AAC, 1 (0.2) ADC internal setting, fixing bracket	II
JDW-5	H530996	30 ... 500 Pa	5,000 Pa	approx. 10 ... 25 Pa	Max. switching current: 1.5 (0.4) AAC, 1 (0.2) ADC Internal setting	II
JDW-5 Z	H531000	30 ... 500 Pa	5,000 Pa	approx. 10 ... 25 Pa	Max. switching current: 1.5 (0.4) AAC, 1 (0.2) ADC internal setting, fixing bracket	II
JDW-10	H530997	400 ... 1600 Pa	5,000 Pa	approx. 30 ... 60 Pa	Max. switching current: 1.5 (0.4) AAC, 1 (0.2) ADC Internal setting	II
JDL-111	H5309098	20 ... 300 Pa	15,000 Pa	approx. 10 ... 15 Pa	Max. switching current: 5 (1) AAC, 1 (0.2) ADC internal setting, silicon-free	II
JDL-112	H5309100	40 ... 600 Pa	30,000 Pa	approx. 22 ... 33 Pa	Max. switching current: 5 (1) AAC, 1 (0.2) ADC internal setting, silicon-free	II
JDL-115	H5309136	100 ... 1,000 Pa	30,000 Pa	approx. 20 ... 40 Pa	Max. switching current: 5 (1) AAC, 1 (0.2) ADC internal setting, silicon-free	II
JDL-116	H530960	250 ... 5,000 Pa	30,000 Pa	approx. 60 ... 150 Pa	Max. switching current: 5 (1) AAC, 1 (0.2) ADC internal setting, silicon-free	II
JDL-116 A	H530978	250 ... 5,000 Pa	30,000 Pa	approx. 60 ... 150 Pa	Max. switching current: 5 (1) AAC, 1 (0.2) ADC external setting, silicon-free	II

Differential pressure switches JDW-3 to 10 / JDL-111 ... 116

	Item no.	Features	PG
JZ-06/1	H5309229	Connection set with duct connections made of silicone-free plastic, 2 x 90° angles, 2 extensions 90 mm, 4 self-tapping screws, 2 m tube (external Ø 6 mm)	II
JZ-10	H5309237	Mounting bracket with screws for JDW-3/-5/-10 (Z shape)	II
JZ-28	H531012	IP 65 cover set, consisting of a cover with pressure compensation element, O-ring and 3 screws, suitable for retrofitting types JDL-111, JDL-112, JDL-115 and JDL-116	II
JZ-DA	H5309230	Covering cap with external setting and seal for JDL-111, -112, -115, -116, -117, spare cap for JDL-11x A types	II

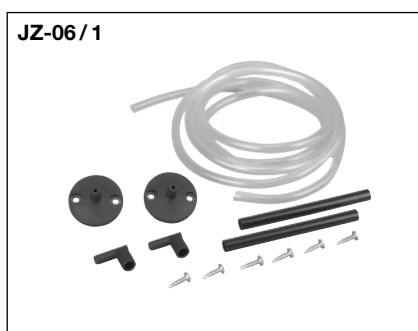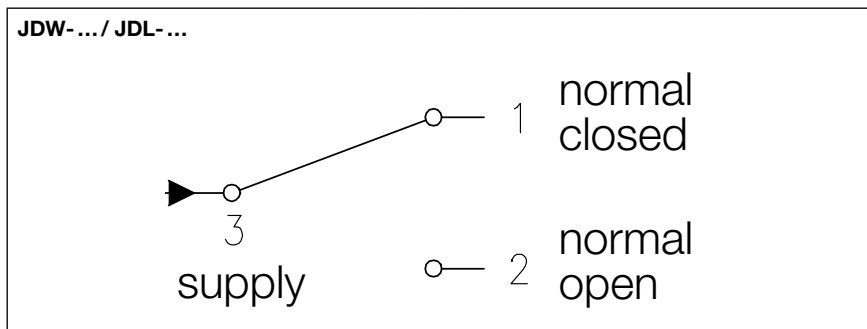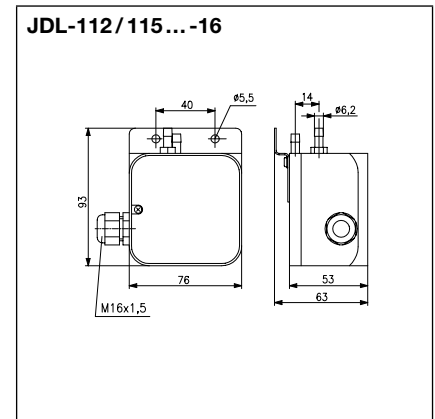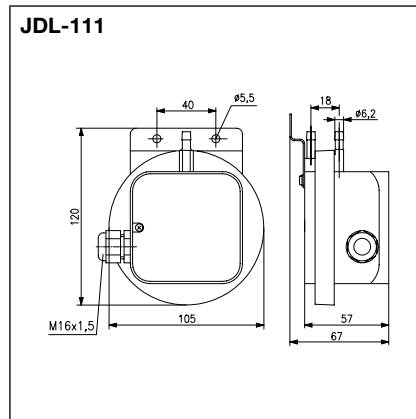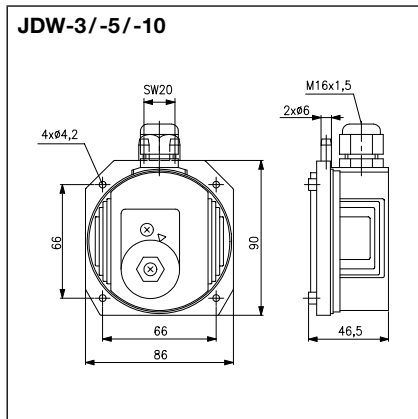

Flow monitor JSF-1E ... 4 E

mechanical – TÜV-tested



Technical data

Housing colour:	grey (lower part like RAL 7016, upper part like RAL 7035)
Ambient temperature:	-40 ... +85 °C
Permissible atmospheric humidity:	Max. 95% rel. humidity, non-condensing
Permissible medium temperature:	120 °C
Operating voltage:	none
Max. switching current:	15 (8) A
Min. switching current:	150 mA at 24 VAC, 50 Hz
Max. switching voltage:	230 VAC, 50 Hz
Min. switching voltage:	24 VAC, 50 Hz
Switching element:	Microswitch
Switching contact:	toggler, potential-free
Control function:	switches if the set value is under-shot or exceeded
Hysteresis:	depends on the pipe diameter (see the table of switching values)
Electrical connection:	screw-type terminals
Mounting/attachment:	assembly by means of tapered Whitworth pipe thread R1"
Protection rating:	IP 65
Protection class:	I
Safety and EMC:	according to DIN EN 60730
Sensor:	flow paddle
Material of paddle:	stainless steel
Function type:	monitor
General features:	Internal setting
Accuracy:	+/- 15% of the set value
Test mark/Approbation:	JSF-1E/JSF-2E/JSF-3E/JSF-4E TÜV.SW.016-13 JSF-1RE/JSF-2RE TÜV.SW.017-13

Application

Flow monitoring of liquid media in pipes from 1/2" to 8", for example, oil, cooling and lubricant circuits or as a precaution against a shortage of water.

Assembly: The device can be mounted in any position.

Calming path at least 5 times the pipe diameter before and after the paddle.*

The max. flow can be significantly higher than the maximum setting value of the Monitor.

Not approved for drinking water applications.

TÜV test up to 6" or for all diameters



Type-tested by the TÜV according to the "Flow 100" VdTÜV circular

Type	Item no.	Pipe	Medium	Features	PG
JSF-3 E	JA060500	1/2"	normal	material of carrier: brass max. pressure: 5 bar attached T-piece, grey iron	II
JSF-4 E	JA060600	3/4"	normal	material of carrier: brass max. pressure: 5 bar attached T-piece, grey iron	II
JSF-1 E	JA060100	1" ... 8"	normal	material of carrier: brass max. pressure: 8 bar	II
JSF-1 RE	JA060200	1" ... 8"	normal	material of carrier: brass max. pressure: 5 bar reduced switching values**	II
JSF-2 E	JA060300	1" ... 8"	aggressive***	material of carrier: V4A max. pressure: 13 bar	II
JSF-2 RE	JA060400	1" ... 8"	aggressive***	material of carrier: V4A max. pressure: 5 bar reduced switching values**	II

Flow monitor JSF-1E...4E

mechanical – TÜV-tested

Accessories	Item no.	Features	PG
JZ-09	E6140170	Spare paddles (each 4 units) from 1" ... 8"	II
* for 1" for 2" for 3" to 8"	= Paddle 1 = Paddle 1 and 2; = Paddle 1, 2 and 3;	If reduced flow values (marked in the table under the "Pipe" column with added letter Z) are to be reached, Paddle 4 should be used as follows: for 4" = Paddle 1, 2, 3, 4 (shorten Paddle 4 to 92 mm) for 5" = Paddle 1, 2, 3, 4 (shorten Paddle 4 to 117 mm); for 6" = Paddle 1, 2, 3, 4 (shorten Paddle 4 to 143 mm); for 7" and 8" = Paddle 1, 2, 3, 4 (Paddle 4 not shortened)	
**	device types for low flow volume (see switching value table) "RE"		
***	medium aggressive: All parts of the current monitor touching the medium are made of V4A.		

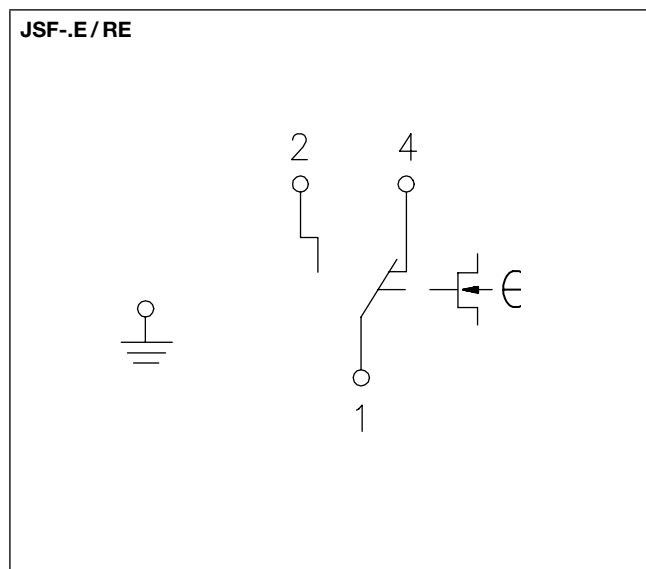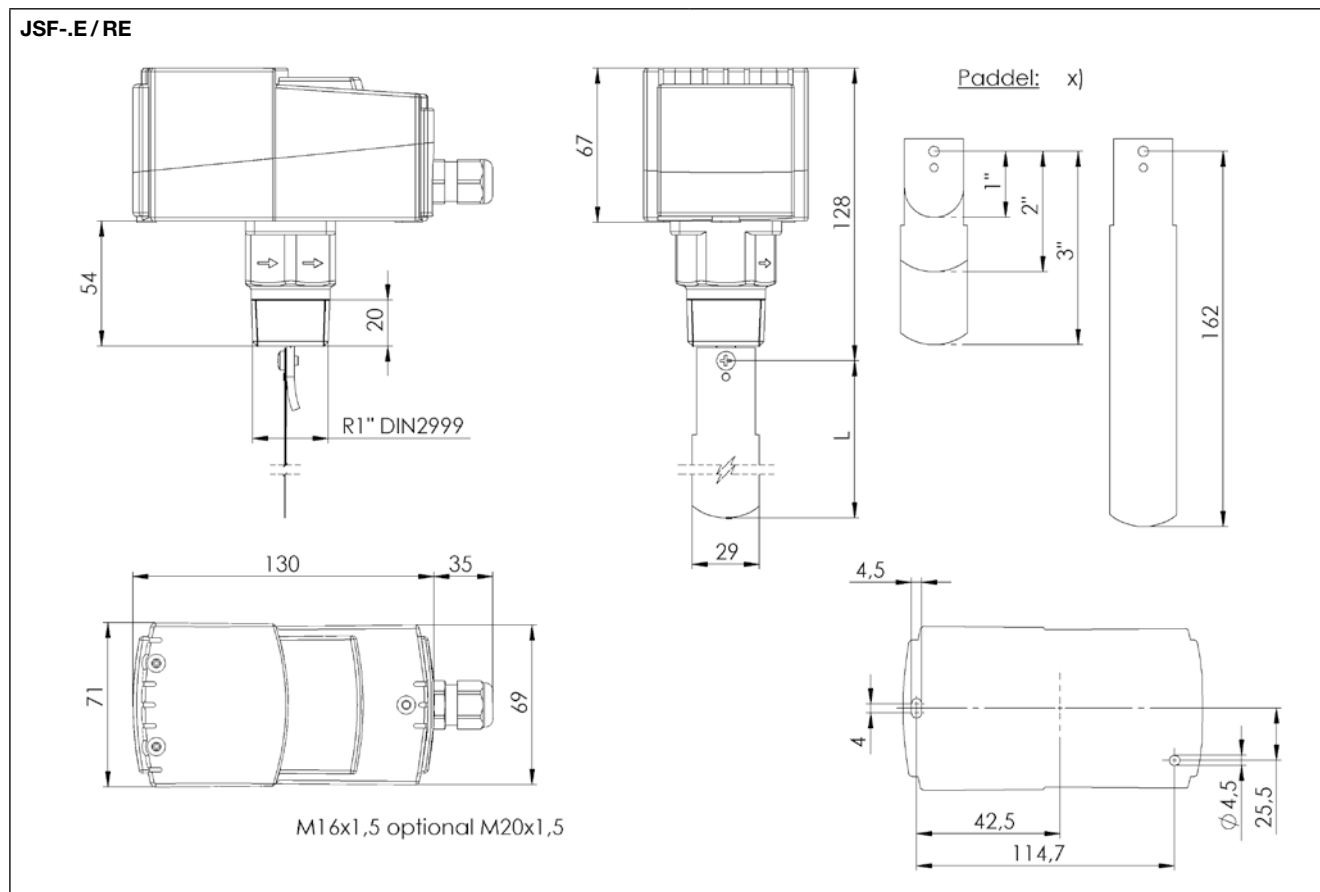

DN nominal width	Pipe thread inches
6	1/8"
8	1/4"
10	3/8"
15	1/2"
20	3/4"
25	1"
32	1 1/4"
40	1 1/2"
50	2"
65	2 1/2"
80	3"
100	4"
125	5"
150	6"

Flow monitor JSF-1E ... 4 E

mechanical – TÜV-tested

Switching value table in m³/h for JSF-1E / 2E / 1RE / 2RE

Type	Pipe diameter	Min. setting (factory setting)		Max. setting	
		Off	On	Off	On
E	1"	0.55	0.86	2.00	2.10
RE	1"	0.19	0.57	1.00	1.10
E	1¼"	0.82	1.30	2.80	3.00
RE	1¼"	0.24	0.90	1.40	1.60
E	1½"	1.10	1.70	4.00	4.20
RE	1½"	0.50	1.20	1.90	2.20
E	2"	2.10	3.20	7.30	7.80
RE	2"	0.90	2.30	3.60	4.10
E	2½"	2.80	4.30	9.80	10.50
RE	2½"	1.20	3.10	4.90	5.50
E	3"	4.00	6.10	13.80	14.70
RE	3"	2.10	4.90	7.40	8.20
E	4"	10.40	15.40	32.00	33.90
RE	4"	4.90	11.30	17.10	19.10
E	4" Z	7.00	10.50	21.70	23.10
RE	4" Z	3.30	7.70	11.60	13.00
E	5"	20.80	30.60	63.50	67.30
RE	5"	9.70	22.40	34.00	37.90
E	5" Z	10.70	15.80	33.30	34.70
RE	5" Z	5.00	11.50	17.50	19.60
E	6"	29.20	43.00	89.10	94.50
RE	6"	13.60	31.50	47.60	53.20
E	6" Z	13.10	19.30	39.90	42.40
RE	6" Z	6.10	14.10	21.40	23.90
E	8"	72.60	85.10	165.70	172.50
RE	8"	25.70	59.60	90.10	100.70
E	8" Z	38.60	46.50	90.80	94.20
RE	8" Z	21.70	36.50	55.30	61.80

When there is a "Z" (=additional paddle) in the "Pipe" column, the long paddle 4 included in the delivery must be used in addition to the 3 factory-installed paddles.

Switching value table in l/h for JSF-3 E / -4 E

3 E	½	174	480	846	948
4 E	¾	138	408	768	858

The accuracy of the specified values depends on the actual diameter of the pipe, the actual reduction in the extra paddle and the flow monitor's installation depth.

The devices are set to the minimum switch-off value at the factory. By turning the inner adjusting screw in a clockwise direction, you can set a higher deactivation value. The actual flow quantity must in any case be higher than the one specified in the switch table or the switch-on value, but there is no upper limit. The values specified apply to volume-related mass (density) of water. If the flow drops below the value that has been set, contacts 1 and 2 open and contacts 1 and 4 close.

Flow monitor JSW

with device plug



Technical data

Housing colour:	black
Material of paddle:	stainless steel
Material of carrier:	nickel-plated brass
Ambient temperature:	-20 ... +70 °C
Permissible atmospheric humidity:	Max. 95% rel. humidity, non-condensing
Max. pressure:	25 bar
Permissible medium temperature:	110 °C
Operating voltage:	none
Max. switching current:	5 A
Min. switching current:	100 mA at 24 VAC, 50 Hz
Max. switching voltage:	230 VAC, 50 Hz
Min. switching voltage:	24 VAC, 50 Hz
Switching element:	microswitch
Switching contact:	toggler, potential-free
Control function:	switches if the set value is undershot or exceeded
Electrical connection:	4-pin plug according to DIN EN 175301-803 (previously DIN 43650 - A / ISO 4400)
Mounting/attachment:	Union nut G 3/8" on soldering socket (for soldering into a standard copper T-piece with outlet 1/2") or T-piece
Protection rating:	IP 65
Protection class:	II
Safety and EMC:	according to DIN EN 60730
Sensor:	flow paddle
Function type:	monitor
General features:	Internal setting
Accuracy:	+/- 15% of the set value (switching values are only accurate if the flow monitor has been installed in our T-piece. If copper T-pieces are used, the switching values will increase.)

Application

Monitoring small and medium, non-aggressive quantities of liquid in pipes with small diameters 1/2" to 1".

Assembly: Vertical in a horizontal pipe. Calming path at least 5 times the pipe diameter before and after the paddle.

Not approved for drinking water applications.

Brass union nut G 3/4" with O-ring and brazing spout for brazing in a standard copper T-piece with outlet 1/2" included in the scope of delivery.

Type	Item no.	Pipe	DN	Max.	Switching point dropping*	Switching point rising	Δl/min	PG
JSW-1/2	H530944	1/2"	15	20 l/min	5... 6.5 l/min	5.5... 7 l/min	0.5	III
JSW-3/4	H530945	3/4"	20	40 l/min	7... 9.5 l/min	9... 11 l/min	2	III
JSW-1	H530946	1"	25	60 l/min	13.5... 16.5 l/min	17... 20.5 l/min	3.5	III






T-piece (nickel-plated brass):

T-piece 1/2"	H530957	III
T-piece 3/4"	H530951	III
T piece 1"	H530953	III

Flow monitor JSW

with device plug

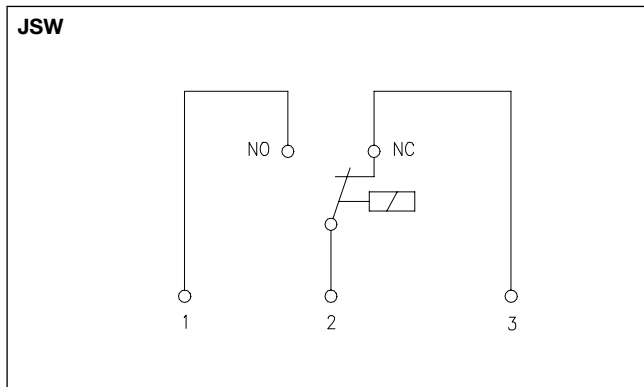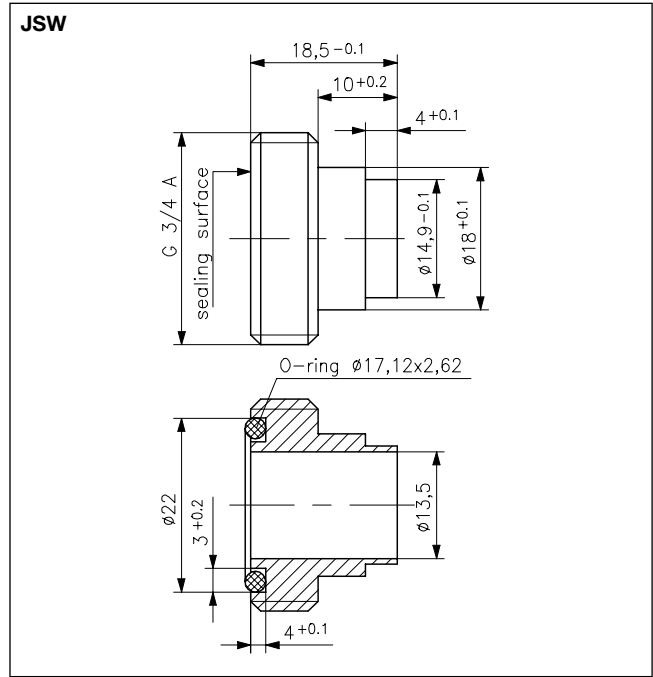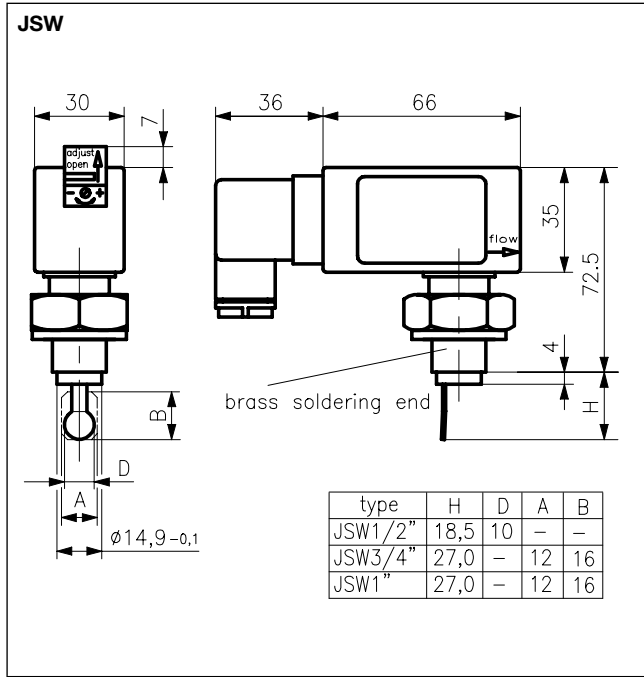

The device works according to the principle of a spring-loaded paddle with magnetic control of a microswitch. When in rest position or if the switch-off value is undershot (= "dropping switching point"), contacts 2 and 3 are closed and can be used as signal contacts. Upon reaching the upper switching value (= switch-on value or "switching point rising"), the contact changes and 2 to 1 are closed. If used as a water shortage safeguard, for example, a pump can be switched on with these contacts. The actual flow quantity must in any case be higher than the switch-on value, but there is no upper limit. The switching points given in the table apply to flow monitors with an attached T-piece and a water temperature of 20 °C in a horizontal pipe. The devices are set to the minimum value at the factory, but can be adapted to an existing system. To that end, the cover of the setting screw on the front side (which is designed so that it cannot be lost) is pushed up in the direction of the arrow and the setting screw is rotated by a maximum of 7 revolutions in the plus direction. With a switching value range of, for example, 13–16.5 l/min, a setting range of 3.5 l/min is obtained. With a total of 7 permissible screw revolutions, this gives a change of 0.5 l/min per screw revolution.

SENSOR TECHNOLOGY



Perfect control requires
excellent sensors.



SENSOR TECHNOLOGY

Sense correctly to act intelligently.

Sensor technology is becoming more and more important. It makes life safer and more comfortable through the processing of multifarious data. Physical parameters (temperature or pressure) are captured and made available to the intelligent control technology.

Sensor technology as the basis of safety and comfort.








Application examples:

- Temperature measurement in residential and business spaces, outdoor areas, surface temperatures (contact sensors) in liquid and gaseous media, such as in pipelines and air ducts
- Pressure measurement in liquid and gaseous media, for example in hydraulics, pneumatics, mechanical and plant engineering, process technology, ventilation or air conditioning applications, clean room technology, fine draft measurement
- Temperature measurement in rooms or ducts
- Outdoor temperature measurement, for example in refrigeration, air conditioning and ventilation systems, clean room technology, greenhouses, medical rooms, meteorology




SENSOR TECHNOLOGY overview:

Temperature

	Room temperature sensor (surface-mounted/flush mounted) – passive	200–202
	Outdoor temperature sensor – passive	203–204
	Sleeve temperature sensors / cable temperature sensors	205–206
	Contact temperature sensors – passive	207
	Pendulum temperature sensors / radiation temperature sensors	208–209
	Assembly-type duct sensors – passive	210
	Industrial assembly type duct sensors – (Form B) passive	211

Differential pressure

	Differential pressure transducers (air)	212
---	--	------------

**Sensor characteristic curves
(see the technical annex in section “Accessories / miscellaneous”)**

Room temperature sensors – surface-mounted BTF2

Surface-mounted “ultra-thin” – Design Berlin 1000, for measuring the temperature in dry rooms



Technical data

Design:	Berlin 1000
Housing colour:	pure white, like RAL 9010
Housing material:	ABS plastic
Ambient temperature:	-10 ... +50 °C
Permissible atmospheric humidity:	max. 95% rel. humidity, non-condensing
Electrical connection:	screw-type terminals 0.33 mm ² to 1.5 mm ² only to safety extra low voltage max. 30 VAC/42 VDC
Max. measurement current:	< 1 mA
Sensor wire extendable:	depending on the cross-section of the conductor and the sensor unit type
Tolerances:	PT100/PT1000 DIN EN 60751 B
Mounting/attachment:	Surface/wall mounting (4-hole assembly on flush-mounted socket)
Protection rating:	IP 30
Protection class:	III
Safety and EMC:	according to DIN EN 60730
Sensor characteristic curves:	the sensor characteristic curves can be found in the “Miscellaneous” section

Application

Temperature measurement in living spaces and office spaces.


Assembly and wiring of the lower part can take place separately, surface-mounted or on a switch socket
Ø 60 mm by means of socket screws.

Please follow the EMC directives. Avoid parallel routing with mains voltage-bearing wires, or use shielded wires.


Sensor	Type	Item no.	PG
PT-100	BTF2-P100-0000	SA140000	III
PT-1000	BTF2-P1000-0000	SA140001	III
NTC 2K25 “Sensor 0”	BTF2-C225-0000	SA140013	III
NTC 47K “Sensor 2”	BTF2-C47-0000	SA140014	III
NTC 8K “Sensor 3”	BTF2-C08-0000	SA140015	III
NTC 10K “Sensor 4”	BTF2-C10-0000	SA140006	III
NTC 2K “Sensor 8”	BTF2-C02-0000	SA140016	III
KTY 81-121 “Sensor 51”	BTF2-Y81/121-0000	SA140017	III
KTY 11-7 “Sensor 57”	BTF2-Y11/7-0000	SA140018	III

Accessories	Item no.	Features	PG
JZ-21	MN990006	Adapter frame for mounting room temperature sensors of the Berlin 1000 series in flush-mounted sockets up to 80 x 80 mm	I

Dimension drawing Berlin 1000

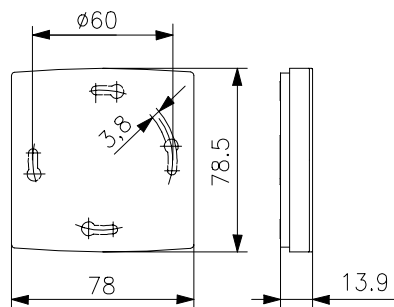

Circuit diagram



Room temperature sensors – flush-mounted FUF

for measuring the temperature in dry rooms



Technical data

Design:	Berlin UP (flush-mounted)
Housing colour:	pure white, like RAL 9010
Housing material:	PC plastic
Ambient temperature:	-10...+50 °C
Permissible atmospheric humidity:	max. 95% rel. humidity, non-condensing
Electrical connection:	screw-type terminals 0.5 mm ² to 1.5 mm ² only to safety extra low voltage max. 30 VAC/42 VDC
Max. measurement current:	< 1 mA
Sensor wire extendable:	depending on the cross-section of the conductor and the sensor unit type
Tolerances:	PT100/PT1000 DIN EN 60751 B
Mounting/attachment:	in flush-mounted socket, can be adapted to fit virtually any 50 x 50 mm surface switch ranges
Protection rating:	IP 30
Protection class:	III
Safety and EMC:	according to DIN EN 60730
Sensor characteristic curves:	the sensor characteristic curves can be found in the "Miscellaneous" section

Application

Temperature measurement in living spaces and office spaces.

The room temperature sensor with 50 x 50-mm cover can be integrated into almost all switch ranges by means of an insert frame. (Frames are not a part of the delivery scope.) For integration examples, see the "Heating technology" section.

Please follow the EMC directives. Avoid parallel routing with mains voltage-bearing wires, or use shielded wires.


Sensor	Type	Item no.	Surface finish	PG
PT-100	FUFP 100-0000	SN090000	glossy	III
PT-1000	FUFP 1000-0000	SN090001	glossy	III
NTC 2K25 "Sensor 0"	FUFC 225-0000	SN090197	glossy	III
NTC 47K "Sensor 2"	FUFC 47-0000	SN090198	glossy	III
NTC 8K "Sensor 3"	FUFC 08-0000	SN090199	glossy	III
NTC 10K "Sensor 4"	FUFC 10-0000	SN090005	glossy	III
NTC 2K "Sensor 8"	FUFC 02-0000	SN090200	glossy	III
KTY 81-121 "Sensor 51"	FUFY 81/121-0000	SN090201	glossy	III
KTY 11-7 "Sensor 57"	FUFY 11/7-0000	SN090202	glossy	III

Accessories	Item no.	Features	PG
JZ-090.900	VV000025	alre frame "Berlin" for all flush-mounted controllers and sensors with 50 x 50-mm pure white cover, glossy, like RAL 9010	I


Room temperature sensors – flush-mounted FUF

for measuring the temperature in dry rooms


FUF with alre frame "Berlin"

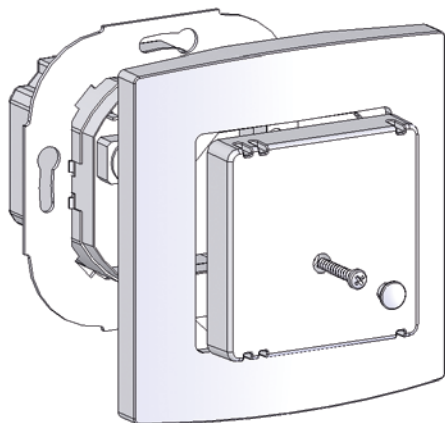

Dimension drawing RUF

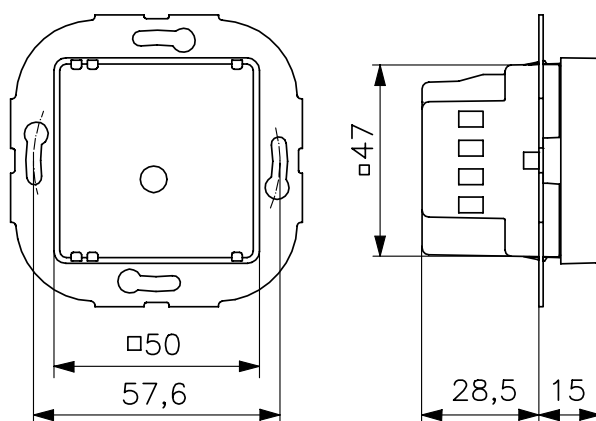

Circuit diagram FUFxx-0000



Outdoor temperature sensors AF with passive output

AF... outdoor temperature sensor with inside sensor

AF



Technical data

Housing colour:	pure white, like RAL 9010
Housing material:	PA plastic (30% GF reinforced)
Ambient temperature:	-30...+70 °C
Permissible atmospheric humidity:	max. 95% rel. humidity, non-condensing
Electrical connection:	screw-type terminals 0.14 mm ² up to 2.5 mm ² only to safety extra low voltage max. 30 VAC/42 VDC
Max. measurement current:	< 1 mA
Sensor wire extendable:	depending on the cross-section of the conductor and the sensor unit type
Tolerances:	PT100/PT1000 DIN EN 60751 B
Mounting/attachment:	surface/wall mounting
Protection rating:	IP 65
Protection class:	III
Safety and EMC:	according to DIN EN 60730
Sensor characteristic curves:	the sensor characteristic curves can be found in the "Miscellaneous" section




Application

The AF outdoor temperature sensors are used for temperature measurement in the outdoors, in damp environments, in cold storage rooms and greenhouses as well as in industrial applications and are specially protected against dust and moisture. If there is direct incident sunlight on the sensor housing, the use of a sun shade is recommended.

Please follow the EMC directives, avoid parallel routing with mains voltage-bearing wires, or use shielded wires.

Sensor	Type	Item no.	PG
PT 100	AFP 100	G9040010	III
PT 1000	AFP 1000	G9040020	III
NTC 2K25 "Sensor 0"	AF-0	G9040360	III
NTC 1K "Sensor 1"	AF-1	G9040370	III
NTC 47K "Sensor 2"	AF-2	G9040380	III
NTC 8K "Sensor 3"	AF-3	G9040390	III
NTC 10K "Sensor 4"	AF-4	G9040400	III
NTC 50K "Sensor 5"	AF-5	G9040561	III
NTC 2K "Sensor 8"	AF-8	G9040410	III
KTY 81-121 "Sensor 51"	AF-51	G9040420	III
KTY 11-7 "Sensor 57"	AF-57	G9040681	III

Accessories	Item no.	Features	PG
S protection 01	G9990170	Ball impact guard, sun and rain protection; 150 x 90 x 47 mm; stainless steel V4A 1.4571	29.60/III

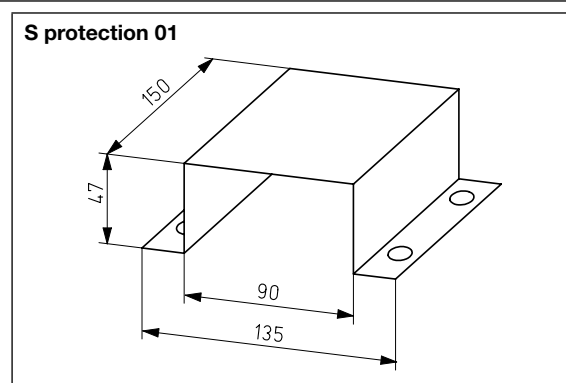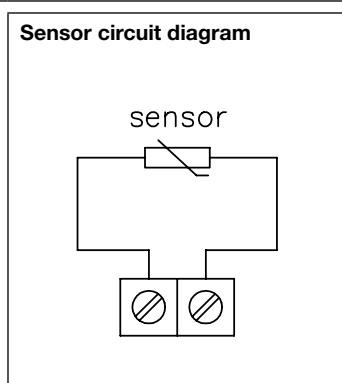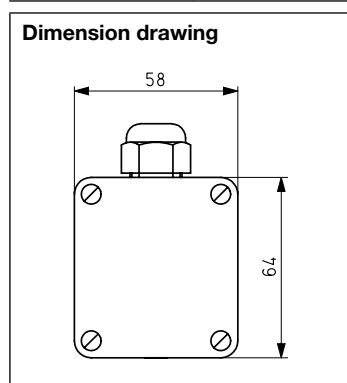

Outdoor temperature sensors AFH with passive output

AFH ... outdoor temperature sensor with sleeve lead-out



Technical data

Housing colour:	pure white, like RAL 9010
Housing material:	PA plastic (30% GF reinforced)
Operating voltage (active):	24 VDC
Ambient temperature:	-30 ... +70 °C
Permissible atmospheric humidity:	max. 95% rel. humidity, non-condensing
Max. measurement current (passive):	< 1 mA
Electrical connection:	screw-type terminals 0.14 mm ² to 2.5 mm ² only to safety extra low voltage, max. passive output: 30 VAC/42 VDC
Sensor wire extendable:	depending on the cross-section of the conductor and the sensor unit type
Tolerances:	PT100/PT1000 DIN EN 60751 B
Mounting/attachment:	surface/wall mounting
Protection rating:	IP 65
Protection class:	III
Safety and EMC:	according to DIN EN 60730


Application

The outdoor temperature sensors are used for temperature measurement in the outdoors, in damp room applications, in cold storage rooms and greenhouses as well as in industrial applications and are specially protected against dust and moisture. Owing to the external sensor sleeve, this outdoor sensor has a very good actuation response to temperature changes. If there is direct incident sunlight on the sensor, the use of a sun shade is recommended.

Please follow the EMC directives, avoid parallel routing with mains voltage-bearing wires, or use shielded wires.

Sensor	Type (passive)	Item no.	PG
PT 100	AFHP 100	G9040160	III
PT 1000	AFHP 1000	G9040170	III
NTC 10 K "Sensor 4"	AFHC 10	G9040220	III

Dimension drawing

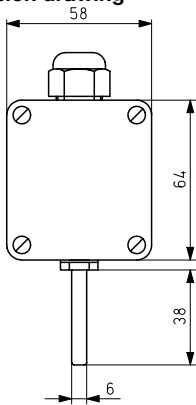

Sleeve temperature sensors HF

HF.../P sleeve temperature sensor with PVC cable

HF.../S sleeve temperature sensor with silicone cable




Technical data (HF.../P and HF.../S)		Application
Sensor dimensions:	Ø 6 mm x 45 mm	The HF sleeve sensors are used for temperature measurement in liquid or gaseous media. Thanks to the moisture-impermeable burnishing, the sleeve sensor is particularly protected against moisture and dust.
Sensor sleeve material:	V2A (1.4301)	
Permissible atmospheric humidity:	max. 95% relative humidity, non-condensing	If used in liquid media, integration in an immersion sleeve is necessary.
Max. measurement current:	< 1 mA	
Electrical connection:	only to safety extra low voltage max. 30 VAC/42 VDC, HFP 100/S/3L 3-conductor, HFP 100/S/4L 4-conductor	
Connecting cable:	1 m, 2 x 0.5 mm ² (HFP 100/S/6 m: 6 m, 2 x 0.5 mm ²)	
Sensor wire extendable:	depending on the cross-section of the conductor and the sensor unit type	
Tolerances:	PT100/PT1000 DIN EN 60751 B	
Mounting/attachment:	in immersion sleeve, protection coil, on pipe etc.	
Protection rating:	IP 65, moisture-impregnable burnishing	
Protection class:	III	
Safety and EMC:	according to DIN EN 60730	
Sensor characteristic curves:	the sensor characteristic curves can be found in the "Miscellaneous" section	
Immersion sleeves:	Immersion sleeves can be found in the "Miscellaneous" section.	

Please follow the EMC directives, avoid parallel routing with mains voltage-bearing wires, or use shielded wires.

Sensor	Type	Item no.	Features	PG
PT 100	HFP 100/P	G9030010	Sensor wire PVC, -35...+105 °C	III
PT 1000	HFP 1000/P	G9030020	Sensor wire PVC, -35...+105 °C	III
NTC 10 K	HFC 10/P	G9030070	Sensor wire PVC, -35...+105 °C	III

Sensor	Type	Item no.	Features	PG
PT 100	HFP 100/S	G9030140	Sensor wire, silicone, -50...+150 °C	III
PT 100	HFP 100/S/6 m	G9030411	Sensor wire, silicone, -50...+150 °C	III
PT 1000	HFP 1000/S	G9030150	Sensor wire, silicone, -50...+150 °C	III
Ni 1000	HFN 1000/S	G9030160	Sensor wire, silicone, -50...+150 °C	III
NTC 10 K	HFC 10/S	G9030200	Sensor wire, silicone, -50...+150 °C	III

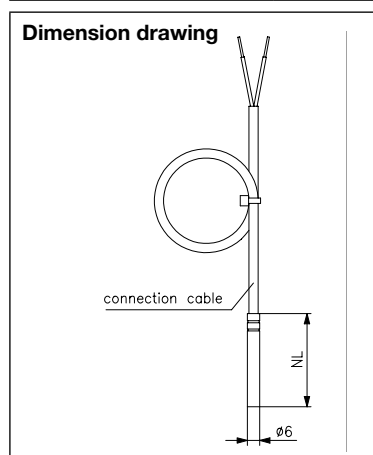

Cable temperature sensor KF

(Remote sensor for alre standard devices, for example, ITR79...)




Technical data	Application
Sensor dimensions: see dimension schematic Sensor sleeve material: V4A (1.4571) Permissible atmospheric humidity: max. 95% rel. humidity, non-condensing Max. measurement current: < 1 mA Electrical connection: only to safety extra low voltage max. 30 VAC/42 VDC KF-100-4 and KF-100/6-4 4-wire Sensor wire extendable up to: depending on the cross-section of the conductor and the sensor unit type Tolerances: PT100/PT1000 Class B Mounting/attachment: in immersion sleeve, protection coil, on pipe etc. Protection rating: IP 67 Protection class: III Sensor characteristic curves: the sensor characteristic curves can be found in the "Miscellaneous" section Accessories: Immersion sleeves/protection coils can be found under Miscellaneous	For temperature measurement of liquid media by integrating in immersion sleeves (TH/NTH). For temperature measurement of air and non-aggressive gases in the air duct by integration in a protection coil (SW-200, see the "Accessories/ miscellaneous" section).

Please follow the EMC directives, avoid parallel routing with mains voltage-bearing wires, or use shielded wires.

Sensor	Type	Item no.	Features	PG
"Sensor 0" (NTC 2 K 25)	KF-0	G9031441	Wire PE, 1,5 m, -35...+100 °C	III
"Sensor 1" (NTC 1K)	KF-1	G9031442	Wire PE, 1,5 m, -35...+100 °C	III
"Sensor 2" (NTC 47K)	KF-2	G9031446	Wire PE, 1,5 m, -35...+100 °C	III
"Sensor 3" (NTC 8 K)	KF-3	G9031447	Wire PE, 1,5 m, -35...+100 °C	III
"Sensor 4" (NTC 10 K)	KF-4	G9031449	Wire PE, 1,5 m, -35...+100 °C	III
"Sensor 4" (NTC 10 K)	KF-4/6	G9031450	Wire PE, 6 m, -35...+100 °C	III
"Sensor 5" (NTC 50 K)	KF-5	G9031451	Wire PE, 1,5 m, -35...+100 °C	III
"Sensor 6" (NTC 100 K)	KF-6	G9031455	Wire PE, 1,5 m, -35...+100 °C	III
"Sensor 51" (KTY 81-121)	KF-51	G9031452	Wire silicone, 1,5 m, -50...+150 °C	III
"Sensor 51" (KTY 81-121)	KF-51/6	G9031453	Wire silicone, 6 m, -50...+150 °C	III
"Sensor 57" (KTY 11-7)	KF-57	G9031454	Wire PE, 1,5 m, -35...+100 °C	III
PT-100	KF-100-4	G9031443	Wire silicone, 1,5 m, -50...+180 °C	III
PT-100	KF-100/6-4	G9031444	Wire silicone, 6 m, -50...+180 °C	III
PT-1000	KF-1000	G9031445	Wire silicone, 1,5 m, -50...+180 °C	III

Dimension drawing KF

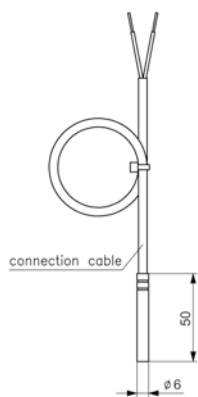

Contact temperature sensor ALF



Technical data	Application
----------------	-------------

Housing colour:	pure white, like RAL 9010
Housing material:	PA plastic (30% GF reinforced)
Ambient temperature:	-30 ... +70 °C
Permissible atmospheric humidity:	max. 95% rel. humidity, non-condensing
Max. measurement current (passive):	< 1 mA
Electrical connection:	Screw-type terminals 0.14 mm ² to 2.5 mm ² only to safety extra low voltage passive max. 30 V AC/42 VDC
Mounting/attachment:	on pipe by means of cable tie
Tolerances:	PT100/PT1000
Protection rating:	IP 65
Protection class:	III
Safety and EMC:	according to DIN EN 60730
Sensor characteristic curves:	the sensor characteristic curves can be found in the "Miscellaneous" section



The ALF contact temperature sensors are used for temperature measurement on pipes, tubes or heat carriers.

For better temperature transmission between the pipe and the contact sensor, the use of a heat conducting paste is recommended.

Please follow the EMC directives, avoid parallel routing with mains voltage-bearing wires, or use shielded wires.

Sensor	Type	Item no.	PG
PT 100	ALFP 100	G9050010	III
PT 1000	ALFP 1000	G9050020	III
"Sensor 0" (NTC 2K25)	ALF-0	G9050270	III
"Sensor 2" (NTC 47K)	ALF-2	G9050160	III
"Sensor 3" (NTC 8K)	ALF-3	G9050180	III
"Sensor 4" (NTC 10K)	ALF-4	G9050190	III
"Sensor 5" (NTC 50K)	ALF-5	G9050200	III
"Sensor 51" (KTY 81-121)	ALF-51	G9050210	III

Accessories	Item no.	Features	PG
WP-01	G9990180	heat conduction paste 2 ml	II

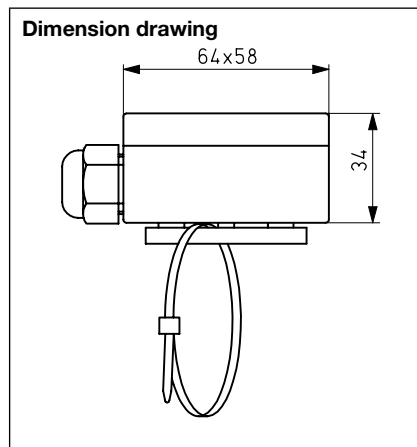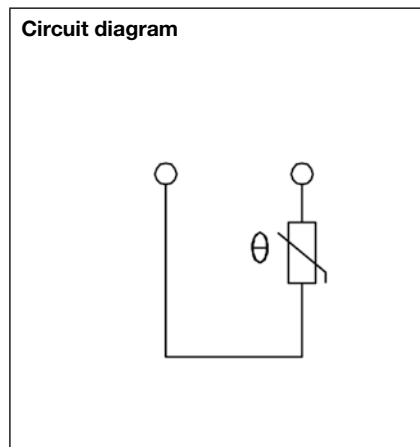

Pendulum temperature sensor PF




Technical data		Application
Sensor material:	Al black, PVC wire	The pendulum temperature sensor PF serves to measure the temperatures in larger spaces. Owing to the spherical form, this sensor captures the temperature from all directions of the room, so that when correctly positioned in the room, a representative measurement result can be achieved.
Sensor dimensions:	Ø 60 mm	
Ambient temperature:	-30 ... +80 °C	
Permissible atmospheric humidity:	max. 95% rel. humidity, non-condensing	
Max. measurement current:	< 1 mA	
Electrical connection:	only to safety extra low voltage max. 30 VAC/42 VDC	
Sensor wire extendable:	depending on the cross-section of the conductor and the sensor unit type	
Connecting cable:	2 x 0.5 mm ²	
Mounting/attachment:	suspended	
Tolerances:	PT100/PT1000 DIN EN 60751 B NI1000 DIN EN 43760 B	
Protection rating:	IP 65	
Protection class:	III	
Safety and EMC:	according to DIN EN 60730	
Sensor characteristic curves:	the sensor characteristic curves can be found in the "Miscellaneous" section	

Please follow the EMC directives, avoid parallel routing with mains voltage-bearing wires, or use shielded wires.

Sensor	Type	Item no.	Features	PG
PT 100	PFP 100	G9130010	Wire length: 1 m	III
PT 1000	PFP 1000	G9130020	Wire length: 1 m	III
"Sensor 4" NTC 10 K	PFC 10	G9130070	Wire length: 1 m	III
"Sensor 2" NTC 47 K	PFC 47 / 6 (6 m)	G9130180	Wire length: 6 m	III

PF dimension drawing

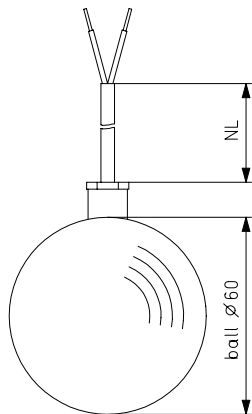

Radiation temperature sensor STF



Technical data	Application
----------------	-------------

Design: Berlin 2000

Housing colour: pure white, like RAL 9010, ball black

Housing material: ABS plastic

Ambient temperature: -20 ... +60 °C

Permissible atmospheric humidity: max. 95% rel. humidity, non-condensing

Max. measurement current: < 1 mA

Electrical connection: screw-type terminals 0.14 mm² up to 1.5 mm²
only to safety extra low voltage
max. 30 VAC/42 VDC

Sensor wire extendable: depending on the cross-section of the conductor and the sensor unit type

Mounting/attachment: surface/wall mounting (4-hole assembly on flush-mounted socket)

Protection rating: IP 30

Protection class: III



Safety and EMC: according to DIN EN 60730

Sensor characteristic curves: the sensor characteristic curves can be found in the "Miscellaneous" section

The radiation temperature sensor is a dual sensor for the measurement of radiation and room heat. The radiation sensor is located in the black hemisphere; the room sensor is located in the plastic housing. Connection with screw-type terminals.

Please follow the EMC directives, avoid parallel routing with mains voltage-bearing wires, or use shielded wires.

Sensor	Type	Item no.	PG
"Sensor 0" 2x NTC 2 K 25	STF-0	SN080100	III
"Sensor 2" 2x NTC 47 K	STF-2	SN080200	III
"Sensor 4" 2x NTC 10 K	STF-4	SN080400	III
"Sensor 51" 2x KTY-81-121	STF-51	SN080500	III

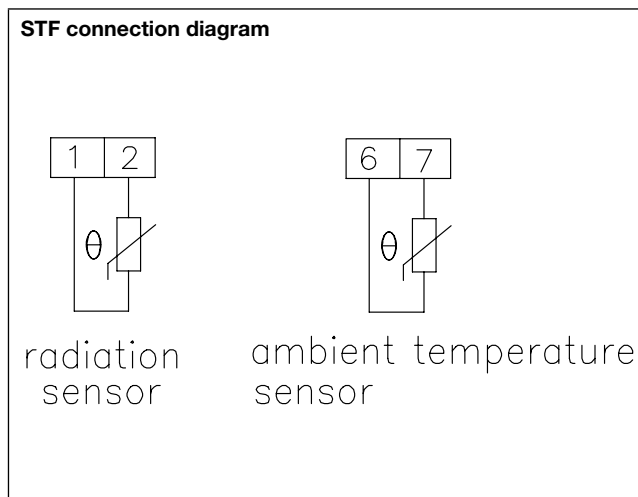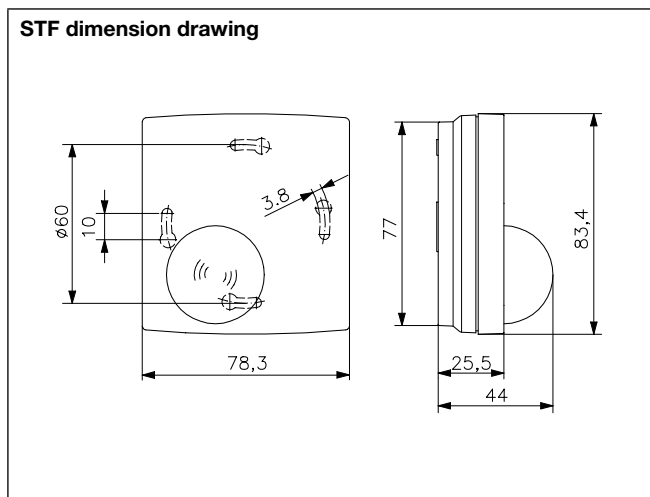

Assembly-type duct sensor EKF

with passive output



Technical data

Housing colour:	pure white, like RAL 9010
Housing material:	PA plastic (30% GF reinforced)
Sensor tube material:	V2A (1.4301)
Ambient temperature:	-30 ... +70 °C
Max. sensor temperature	150 °C
Permissible atmospheric humidity:	max. 95% rel. humidity, non-condensing
Electrical connection:	screw-type terminals 0.14 mm ² up to 2.5 mm ² only to safety extra low voltage max. 30 VAC/42 VDC
Tolerances:	PT100/PT1000 DIN EN 60751 B
Mounting/attachment:	in immersion sleeves (THMs, THV) for fluids or with mounting flange (MF) in air ducts
Protection rating:	IP 65
Protection class:	III
Safety and EMC:	according to DIN EN 60730
Sensor characteristic curves:	the sensor characteristic curves can be found in the "Miscellaneous" section
Immersion sleeves:	From the fitting length (EL), subtract 15 mm to determine the nominal length (NL) of the immersion sleeve, for example, EL = 65 mm corresponds to THV/50

Application

The assembly-type duct sensor EKF is used for measuring temperatures in liquids and gases in pipes, air ducts or tanks. A mounting flange (MF) is required for use in air ducts. If used in liquids, immersion sleeves made of brass with nickel plating (THMs) should be used. For aggressive media, immersion sleeves made of stainless steel V4A (THV) are recommended. Immersion sleeves or mounting flanges are not part of the delivery scope and must be **ordered separately** as accessories.

Accessories: mounting flange for installation in air ducts: MF matching immersion sleeves in brass: Immersion sleeves with brass plating can be found in the "Miscellaneous" section matching immersion sleeves stainless steel (V4A): immersion sleeves made of stainless steel can be found in the "Miscellaneous" section


Sensor wire extendable: depending on the cross-section of the conductor and the sensor unit type

Please follow the EMC directives, avoid parallel routing with mains voltage-bearing wires, or use shielded wires.


Sensor	Fitting length 65 mm (for 50 mm immersion sleeves)	Fitting length 115 mm (for 100 mm immersion sleeves)	Fitting length 165 mm (for 150 mm immersion sleeves)	PG
PT 100	EKFP 100 / 50 Item no.: G9140010	EKFP 100 / 100 Item no.: G9140140	EKFP 100 / 150 Item no.: G9140270	III
PT 1000	EKFP 1000 / 50 Item no.: G9140020	EKFP 1000 / 100 Item no.: G9140150	EKFP 1000 / 150 Item no.: G9140280	III

Accessories	Item no.	Features	PG
MF	G9990160	mounting flange for integrated duct sensor	III


Dimension schematic, assembly-type duct sensor

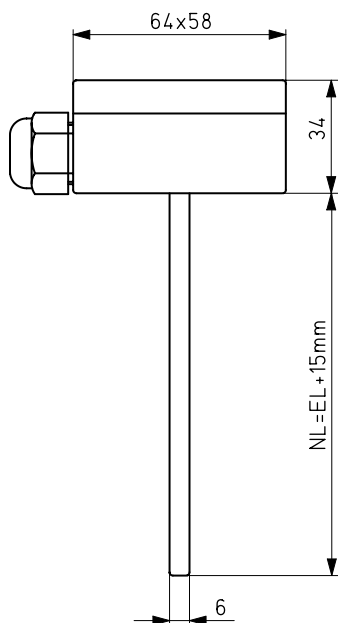

Dimension schematic, mounting flange MF



Circuit diagram, assembly-type duct sensor



Industrial assembly-type duct sensor IKF1 (Form B)

with passive output






Technical data		Application
Housing colour:	silver-grey	<p>The industrial assembly-type duct sensor IKF1 is used for measuring temperatures of liquids and gases in pipes, air ducts or tanks in the mechanical and plant engineering sector. A mounting flange (MF) is required for use in air ducts. If used in liquids, immersion sleeves made of brass with nickel plating (THMs) should be used. For aggressive media, immersion sleeves made of stainless steel V4A (THV) are recommended. Immersion sleeves or mounting flanges are not part of the delivery scope and must be ordered separately as accessories.</p> <p>Sensor wire extendable: Depending on the cross-section of the conductor and the sensor unit type</p>
Housing material:	aluminium	
Sensor tube material:	V2A (1.4301)	
Ambient temperature:	-30...+100 °C	
Permissible atmospheric humidity:	max. 95% rel. humidity, non-condensing	
Max. sensor temperature	150 °C	
Electrical connection:	screw-type terminals 0.14 mm ² up to 2.5 mm ² only to safety extra low voltage max. 30 VAC/42 VDC	
Tolerances:	PT1000 DIN EN 60751 B	
Mounting/attachment:	in immersion sleeves (THMs, THV) for fluids or with mounting flange (MF) in air ducts	
Protection rating:	IP 43	
Protection class:	III	
Safety and EMC:	according to DIN EN 60730	
Sensor characteristic curves:	the sensor characteristic curves can be found in the "Miscellaneous" section	
Immersion sleeves:	From the fitting length (EL), subtract 15 mm to determine the nominal length (NL) of the immersion sleeve, for example, EL = 65 mm corresponds to THV/50	
Accessories:	mounting flange for installation in air ducts: MF matching immersion sleeves in brass: Immersion sleeves with brass plating can be found in the "Miscellaneous" section matching immersion sleeves stainless steel (V4A): immersion sleeves made of stainless steel can be found in the "Miscellaneous" section	

Please follow the EMC directives, avoid parallel routing with mains voltage-bearing wires, or use shielded wires.

Sensor	Fitting length (EL) 65 mm (for 50 mm immersion sleeves)	Fitting length (EL) 115 mm (for 100 mm immersion sleeves)	Fitting length (EL) 165 mm (for 150 mm immersion sleeves)	PG
PT 1000	IKF1P 1000/50 Item no.: G9150020	IKF1P 1000/100 Item no.: G9150150	IKF1P 1000/150 Item no.: G9150280	III

Accessories	Item no.	Features	PG
MF	G9990160	mounting flange for integrated duct sensor	III

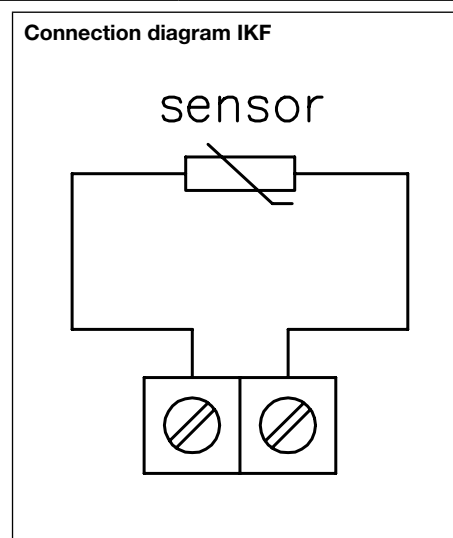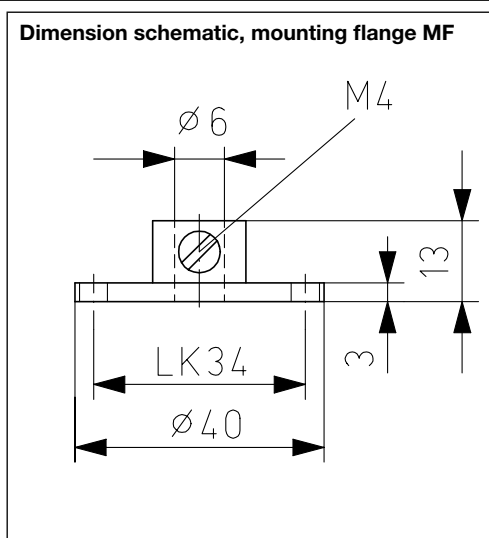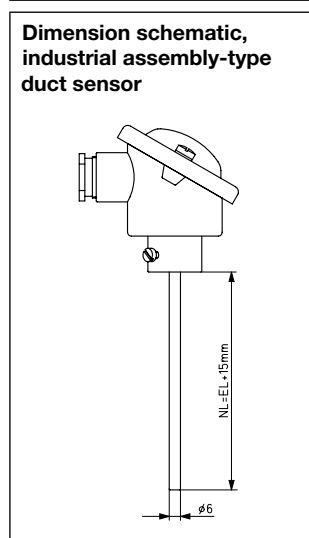

Transducer “Differential pressure – air”



Technical data

Housing colour:	grey
Housing material:	plastic
Material of parts coming in contact with the medium:	Ni, PU, Al, Au, Pyrex glass, silicone, Kovar, Duraplast, Ultem Plasic
Operating voltage:	15–30 VDC, 15–30 VAC
Ambient temperature:	10 ... 50 °C
Permissible atmospheric humidity:	max. 80% rel. humidity, non-condensing
Max. pressure:	5 times the measurement range end value (relative pressure)
Electrical connection:	screw-type terminals up to 1.5 mm ²
Mounting/attachment:	wall mounting
Protection rating:	IP 54
Protection class:	III
Safety and EMC:	according to DIN EN 60730
Sensor:	piezo-resistive pressure sensor
Pressure connection:	d x L: 6.6 x 10 mm (for flexible tubes d = 6 mm)
Cable gland:	M 12 x 1.5
Output signal:	continuous, adjustable 0–10 V, 0–20 mA, 4–20 mA
Accuracy:	Linearity: +/-2% FS Influence of supply: <0.05% Influence of position: 0.1% at 3000 Pa, 0.3% at 1500 Pa, 0.9% at 500 Pa, 1.8% at 250 Pa Temperature drift: offset and range respectively +/-0.12% FS/K Long-term stability: +/-2% FS/year

Application

The microprocessor-controlled pressure transducers are suitable for detecting overpressure, underpressure or differential pressure of non-aggressive gases.

They are used in heating, ventilation or air conditioning applications as well as in clean room technology or for fine draft measurement.

The pressure measurement is performed using a piezo-resistive pressure sensor.


The types MDEKD replace the types DF.

Please follow the EMC directives, avoid parallel routing with mains voltage-bearing wires, or use shielded wires.

Type	Item no.	Measurement ranges	PG
MDEKD-940.000	G9270010	1000 Pa, 750 Pa; 500 Pa; 250 Pa relative pressure	III
MDEKD-940.100	G9270020	10000 Pa; 7500 Pa; 5000 Pa; 2500 Pa relative pressure	III

Accessories	Item no.	Features	PG
JZ-27	G9990450	cover with 3.5-digit LC display for MDEKD, easy assembly	III
JZ-01 L	H5309226	Single duct connection made of plastic (grey) Ø 6 mm external for differential pressure switch JDW, JDL, pressure transducer	II
JZ-06 / 1	H5309229	Connection set with duct connections made of plastic, 2 x 90° angles, 2 extensions 90 mm, 4 self-tapping screws, 2 m tube Ø 6 mm outside for differential pressure switch JDW, JDL, pressure transducer	II

Dimension drawing

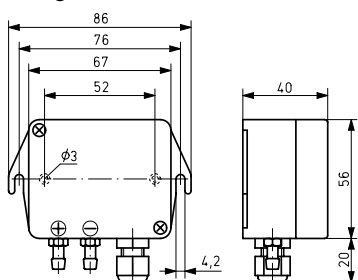

MDEKD with JZ-27



ACCESSORIES AND MISCELLANEOUS



Personalisation off the rack.



ACCESSORIES AND MISCELLANEOUS

Supplements to our range of services.


Perfect control technology becomes even more perfect with our accessories – and there is a broad range of items to choose from. Precise assembly made easy thanks to our technical explanations, assembly instructions and hints on correct use.

This section provides you with the entire range of accessories as well as with valuable tips for experts.

Helping you make things better.

Application examples:

- Controllers for dry and wet saunas
- Process connections for liquid and gaseous media
- Various accessories

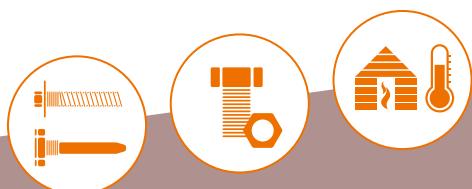

ACCESSORIES / MISCELLANEOUS overview

Sauna controllers

Sauna controllers	216 – 217
-------------------	-----------

Accessories

Accessories	218 – 223
-------------	-----------

Technical annex

Type comparison (old/new)	204
Tips for heating installers and electricians	205
Ecodesign Directive and funding opportunities	206 – 209
Sensor characteristic curves	210 – 211
Technical terms	212 – 213

Index

Index by product designations	214 – 216
Index by type designations	217 – 219

General information / Contact / Addresses



General terms and conditions of supply	220 – 221
Safety regulations	222
Notes on technical data	222
General notes	222
Addresses and contact persons	223

Sauna controllers SAUNATHERM VU/HYGROTHERM VU

For dry and wet saunas






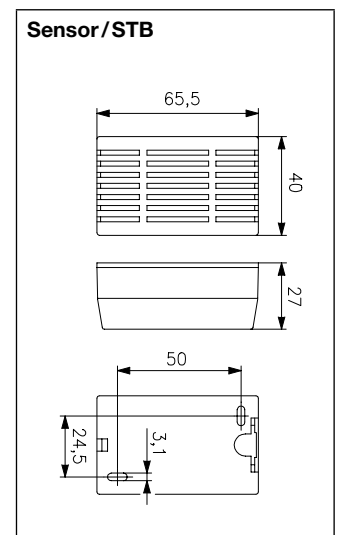
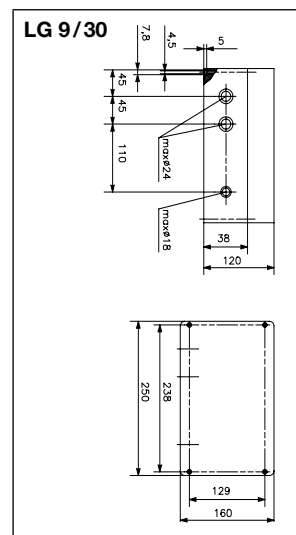
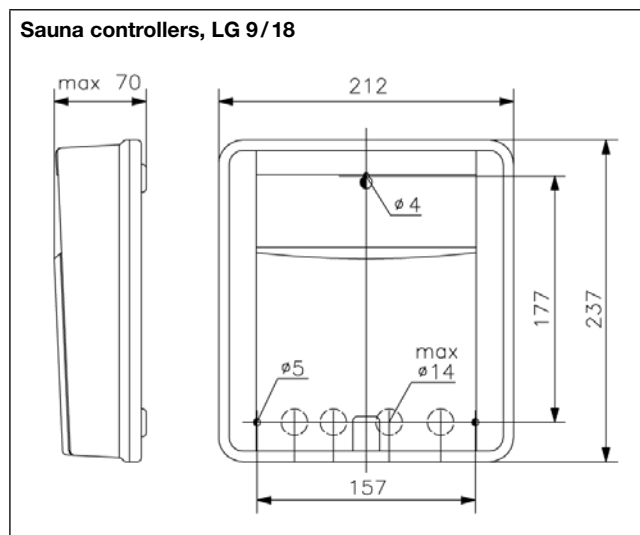
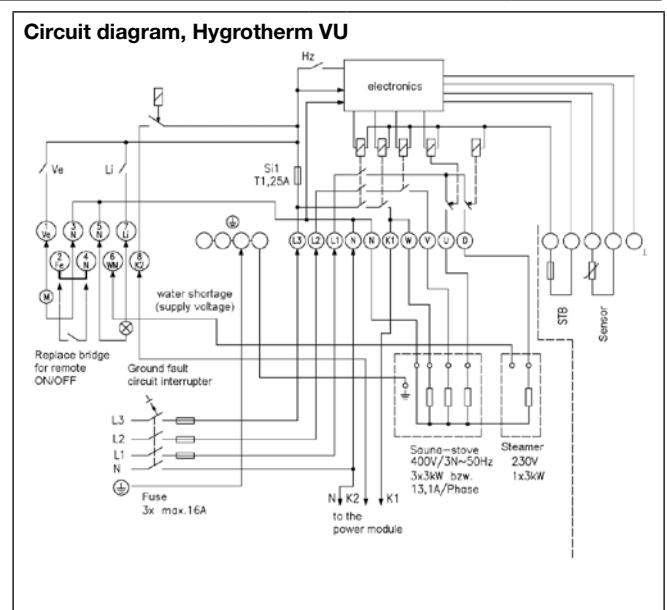
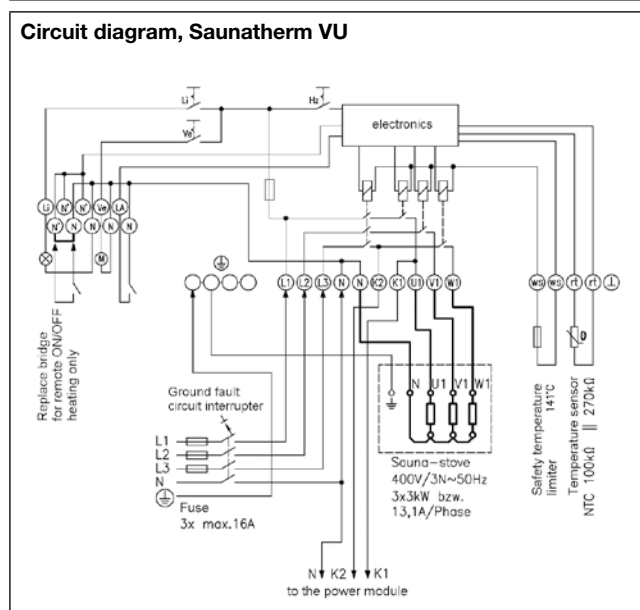
Technical data	Application
Colour:	cream white, like RAL 9001
Housing material:	ABS
Mains voltage:	400 VAC, 3/N 50 Hz
Features:	sensor rupture/short-circuit safeguarding, "light" switch, "ON/OFF" switch, "light/fan/electronics" micro-fuse, "ON/OFF" contact input
Trigger temperature of safety temperature limiter:	approx. 141 °C
Heating time limit:	6 h/12 h/none
Pre-selection timer:	can be set to max. 12 h, 1-h intervals
Switching power, furnace:	max. 9 kW (max. 3 kW per phase)
Switching power, light:	max. 100 W, 230 VAC, 50 Hz
Switching power, fan:	max. 100 W, 230 VAC, 50 Hz
Switching element:	safety protection, relay 3-stage switching
Hysteresis:	approx. 1 K
Display type:	LED
Protection rating:	IP 44
Protection class:	II, if properly mounted
Safeguarding:	T1, 25 A (5x20)
Scope of delivery:	control unit, sensor/STB, fastening screws
Mounting:	wall mounting
Ambient temperature:	-15 ... +25 °C
Electrical connection:	screw-type terminals
Permissible atmospheric humidity:	max. 95% rel. humidity, non-condensing

Type/image	Item no.	Features	PG
 Saunatherm VU	D4700653	Sauna controller for dry saunas (Finnish) Control range: 30 ... 120 °C Switch: "Fan On/Off" Indicators: "HEATING", "ON/OFF", "Pre-selection timer"	III
 Hygrotherm VU	D4700736	Sauna controller for dry saunas (Finnish) or wet saunas Control range, dry sauna: 80 ... 110 °C Control range, wet sauna: 40 ... 60 °C/ approx. 40 ... 95 % rel. humidity Switching power vaporiser: max. 3 kW Switch: "Fan, 3-stage" Indicators: "Heating", "ON/OFF", "Pre-selection timer" Water shortage detection Post-operation drying temperature adjustable: approx. 60 ... 80 °C Post-operation drying limitation: approx. 3.5 h Fan post-operation time: approx. 15 minutes	III

Accessories, sauna controllers SAUNATHERM VU/HYGROTHERM VU

For dry and wet saunas

Type/image	Item no.	Features	PG	
	LG 9/18	D4710450	Power switching unit 9 kW (max. 3 kW per phase) With this unit, all control units can be enhanced from 9 kW to 18 kW switching power (9 kW via control unit + 9 kW via load switch = 18 kW total power).	III
	LG 9/30	H4690008	Power switching unit 21 kW (max. 7 kW per phase) With this unit, all control units can be enhanced from 9 kW to 30 kW switching power (9 kW via control unit + 21 kW via load switch = 30 kW total power).	III
	Sensor/STB	D4700662	Spare sensor/STB for Saunatherm VU and Hygrotherm VU	III




Immersion sleeves/protection coils for RTKSA and for sleeve and cable sensors

For industrial applications and heating technology

THK/NTHK

SW-200/SW-200-12

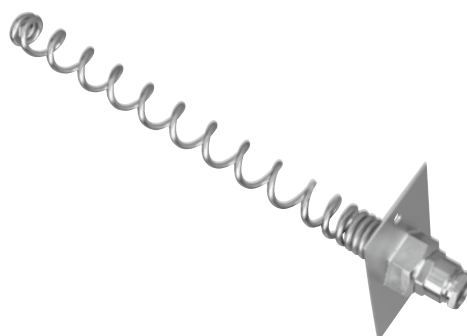

Type	Item no.	Length of L	Diameter I x A*	Material	Max. pressure (P / bar)	PG
Immersion sleeves for RTKSA						
THK-2-100	KA969901	100 mm	7.5 x 10 mm	nickel-plated brass	20	II
THK-2-120	KA969902	120 mm	7.5 x 10 mm	nickel-plated brass	20	II
THK-2-200	KA969903	200 mm	7.5 x 10 mm	nickel-plated brass	20	II
THK-2-280	KA969904	280 mm	7.5 x 10 mm	nickel-plated brass	20	II
THK-2-600	KA969905	600 mm	7.5 x 10 mm	nickel-plated brass	20	II
NTHK-2-100	KA969906	100 mm	7.5 x 10 mm	V4 A (1.4571)	40	II
NTHK-2-120	KA969907	120 mm	7.5 x 10 mm	V4 A (1.4571)	40	II
NTHK-2-200	KA969908	200 mm	7.5 x 10 mm	V4 A (1.4571)	40	II
NTHK-2-280	KA969909	280 mm	7.5 x 10 mm	V4 A (1.4571)	40	II
THK-2-100 x 17	KA979901	100 mm	14.8 x 17 mm	nickel-plated brass	20	II
THK-2-200 x 17	KA979902	200 mm	14.8 x 17 mm	nickel-plated brass	20	II
NTHK-2-100 x 17	KA979903	100 mm	14.8 x 17 mm	V4 A (1.4571)	40	II
NTHK-2-200 x 17	KA979904	200 mm	14.8 x 17 mm	V4 A (1.4571)	40	II

Type	Item no.	Length of L	Diameter I x A*	Material	PG
Protection coil for RTKSA					
SWK-2-100	KA989901	100 mm	10.5 x 17 mm	steel, nickel-plated	II
SWK-2-120	KA989902	120 mm	10.5 x 17 mm	steel, nickel-plated	II
SWK-2-200	KA989903	200 mm	10.5 x 17 mm	steel, nickel-plated	II
SWK-2-280	KA989904	280 mm	10.5 x 17 mm	steel, nickel-plated	II


Type	Item no.	Length of L	Cable gland	Diameter I x A*	Material	PG
Protection coil for capillary fastening in the air duct (JET/JMT/JTF) and all sleeve sensors HF and cable sensors						
SW-200	C1809219	200 mm	7.8 mm	11 x 17 mm	steel, nickel-plated	II
SW-200-12	C1809220	200 mm	11.8 mm	11 x 17 mm	steel, nickel-plated	II

* I = minimum inner diameter
A = nominal outer diameter


Immersion sleeves/protection coils for RTKSA and for sleeve and cable sensors

For industrial applications and heating technology


THK/NTHK

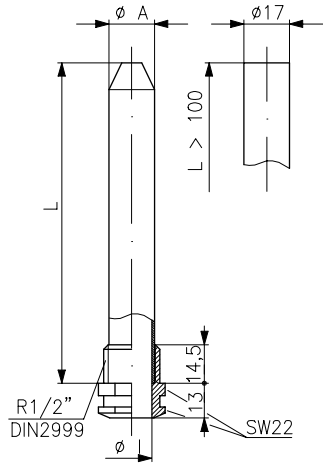


SWK

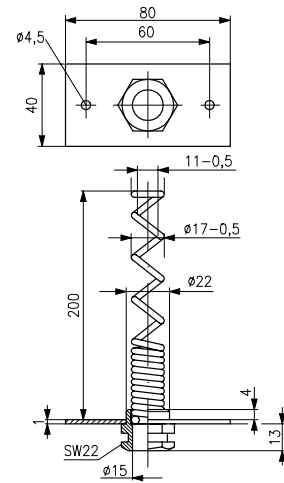

SW-200

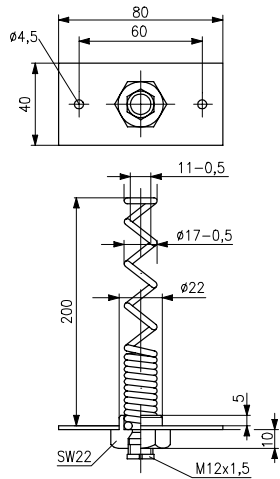

SW-200-12

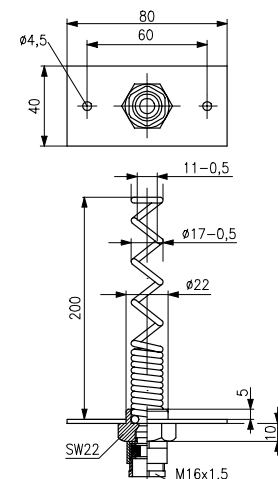

Immersion sleeves for capillary/frost protection thermostats/HF/screed mounting

For industrial applications and heating technology

TH/NTH

THF



Type	Item no.	Length of L	Diameter I x A**	Material	Max. pressure (P/bar)	PG
For sensors HF/KF Ø 7 mm, capillary and frost protection thermostats JET/JMT/WR 81 and JTF (for JTF, only type TH/NTH-140)						
TH-55	C1809296	55 mm	8 x 10 mm	nickel-plated brass	20	II
TH-100	C1809310	100 mm	8 x 10 mm	nickel-plated brass	20	II
TH-140*	C1809409	140 mm	10 x 12 mm	nickel-plated brass	20	II
TH-200	C1809438	200 mm	8 x 10 mm	nickel-plated brass	20	II
TH-280	C1809440	280 mm	8 x 10 mm	nickel-plated brass	20	II
NTH-55	C1809284	55 mm	8 x 10 mm	V4 A (1.4571)	40	II
NTH-100	C1809308	100 mm	8 x 10 mm	V4 A (1.4571)	40	II
NTH-140*	C1809435	140 mm	10 x 12 mm	V4 A (1.4571)	40	II
NTH-200	C1809439	200 mm	8 x 10 mm	V4 A (1.4571)	40	II
NTH-280	C1809441	280 mm	8 x 10 mm	V4 A (1.4571)	40	II

* Suitable for all types with an X in the designation, for example JET-1... X or JMT 206 X

** I = minimum inner diameter

A = nominal outer diameter


Cu protective sleeve for sleeve sensor HF/cable sensor KF Ø 7.7 mm for screed mounting

THF


C1809515

II

TH/NTH

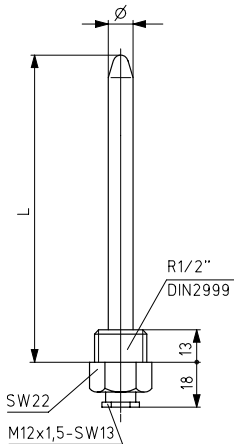




THF

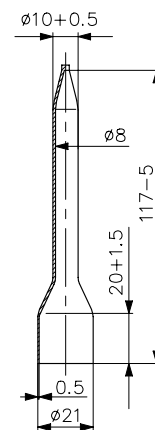

Immersion sleeves / mounting flange for HF, KF, EKF and IKF

for sleeve sensors \varnothing 6 mm PVC and silicone, assembly-type and industrial duct sensors

For sensor technology

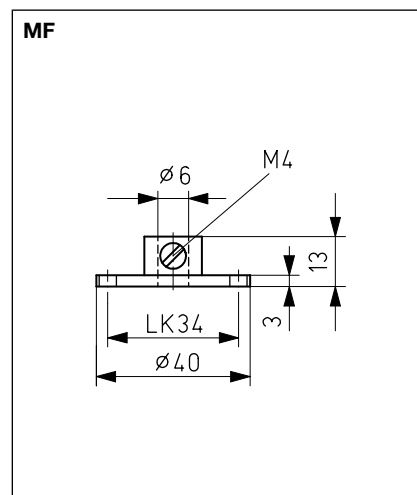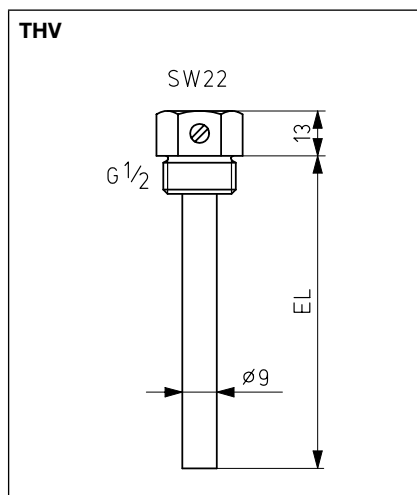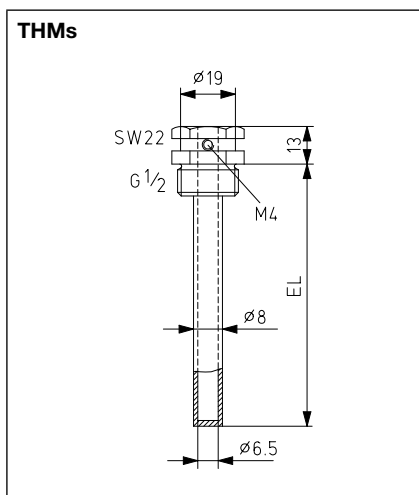

Type	Item no.	Fitting length EL	Diameter I x A *	Max. pressure (P / bar)	PG
Immersion sleeves, nickel-plated, with recess					
THMs / 50	G9990010	50 mm	6.5 x 8 mm	20	II
THMs / 100	G9990020	100 mm	6.5 x 8 mm	20	II
THMs / 150	G9990030	150 mm	6.5 x 8 mm	20	II
THMs / 200	G9990040	200 mm	6.5 x 8 mm	20	II
THMs / 250	G9990050	250 mm	6.5 x 8 mm	20	II
THMs / 300	G9990370	300 mm	6.5 x 8 mm	20	II
Immersion sleeves, stainless steel V4 A 1.4571					
THV / 50	G9990060	50 mm	6.3 x 9 mm	40	II
THV / 100	G9990070	100 mm	6.3 x 9 mm	40	II
THV / 150	G9990080	150 mm	6.3 x 9 mm	40	II
THV / 200	G9990090	200 mm	6.3 x 9 mm	40	II
THV / 250	G9990100	250 mm	6.3 x 9 mm	40	II
THV / 300	G9990200	300 mm	6.3 x 9 mm	40	II
THV / 400	G9990210	400 mm	6.3 x 9 mm	40	II
THV / 450	G9990470	450 mm	6.3 x 9 mm	40	II
THV / 500	G9990220	500 mm	6.3 x 9 mm	40	II
THV / 600	G9990400	600 mm	6.3 x 9 mm	40	II
Mounting flange, aluminium					
MF	G9990160		6 x 40 mm		II


* I = minimum inner diameter

A = nominal outer diameter


Accessories for heating technology/air conditioning technology/plant engineering and sensors

Type	Item no.	Description	PG
ATRS-1	C1809518	Temperature determination set for ATR 83.0...	II
ET-01	MA990000	Adjusting knob for B1000 series devices, scale: Degrees Celsius, pure white glossy	I
ET-02	MA990001	Adjusting knob for B1000 series devices, multi-digit display 1...6, pure white glossy	I
FS-HI	H530975	Sensor protection (protective wire braiding) for duct hygrostat HI	II
FS2-HI	H531011	PTFE filter fine protection for duct hygrostat HI	II
JZ-01 L	H5309226	Single duct connection made of plastic (grey) Ø 6 mm outside for differential pressure switch JDW, JDL, pressure transducers	II
JZ-04	E6160133	capillary tube leadthrough for air ducts with 30 cm protective hose (JTF frost protection thermostats, JMT capillary controllers, WR, JET)	II
JZ-05/6 K	C1809536	1 set of assembly brackets (6 pieces) for JTF frost protection thermostats made of plastic (max. 145 °C)	II
JZ-05/6 M	C1809474	1 set of mounting brackets (6 pieces) for frost protection thermostat JTF, made of metal	II
JZ-05/1 M	C1809462	single mounting bracket for frost protection thermostat JTF, made of metal	II
JZ-06/1	H5309229	Connection set with duct connections made of plastic, 2 x 90° angles, 2 extensions 90 mm, 4 self-tapping screws, 2 m tube Ø 6 mm outside for differential pressure switch, JDW, JDL, pressure transducer DF	II
JZ-07	E6160145	Mounting bracket for frost protection thermostats JTF	II
JZ-08	E6150031	Spare vane for wind indication relay JSL	II
JZ-09	E6140170	Spare paddles (4 pieces), from 1" ... 8" for flow monitor JSF	II
JZ-10	H5309237	Mounting bracket for JDL 109/-113 and JDW-3/-5/-10 with 6 screws	II
JZ-13	ZA990001	standard rail with drilled holes for fastening control cabinet controllers (length 40 mm)	II
JZ-17	MN990001	Adapter plate for Berlin 3000 housing (hard-wired)	II
JZ-18	MN990002	Adapter snap-on plate (controller is detachable) for Berlin 3000 housing (wireless)	II
JZ-19	MN990003	Fully prewired plug-in socket (as for RTBSB-001.411), can be fitted with room thermostats RTBSB-001.086 or RTBSB-001.096	I
JZ-20-1	E6130144	Wall holder including fastening material for duct hygrostat (HI)	II
JZ-21	MN990006	Adapter frame for mounting devices of the Berlin 1000 series in flush-mounted sockets up to 80 x 80 mm	I
JZ-24	BN990002	Magnetic fastening set for simple and safe fastening of multi-channel receivers or wiring strips VOORL	II
JZ-25	BN990003	External antenna for reception enhancement under difficult reception conditions of the multi-channel receiver, antenna cable (JZ-26) is not a part of the delivery scope (see page 31 for product photo)	II
JZ-26	BN990004	Antenna cable 1 m for connecting the external antenna JZ-25 with multi-channel receivers	II
JZ-27	G9990450	LC-display 3½ digit, for MDEKD	III
JZ-28	H531012	IP65 cover set, consisting of a cover with pressure compensation element, O-ring and 3 screws, suitable for retrofitting of the types JDL-111, JDL-112, JDL-114, JDL-115 and JDL-116	II
JZ-29	KA999901	Mounting set RTKSA for THK/NTHK/SWK single thermostat	I
JZ-30	KA999902	Mounting set RTKSA for THK/NTHK/SWK double thermostat	I
JZ-31	KA999903	Mounting set RTKSA for pipe mounting as contact thermostat	I
JZ-32	BN990005	Magnetic fastening set for simple and safe fastening	I
JZ-090.900	VV000025	alre frame "Berlin" for all flush-mounted controllers with cover 50 x 50 pure white, glossy, like RAL 9010	I
JZ-090.910	VV000010	alre frame "Berlin" for all flush-mounted controllers with cover 50 x 50 pearl white, glossy, like RAL 1013	I
JZ-DA	H5309230	Covering cap with external setting and seal for JDL-111, -112, -115, -116, -117, spare cap for JDL-11x A types	II
S protection 01	G9990170	Ball impact guard, sun and rain protection; 150 x 90 x 47 mm; stainless steel V4A 1.4571	III
WP-01	G9990180	heat conduction paste 2 ml	II















S protection 01



alre frame "Berlin"



Accessories for heating technology/air conditioning technology/plant engineering and sensors

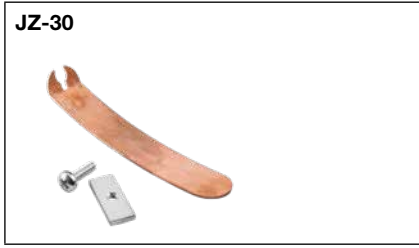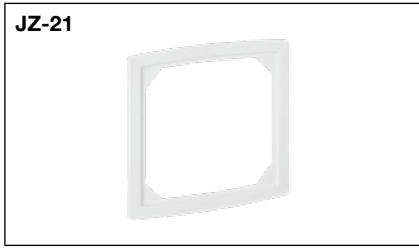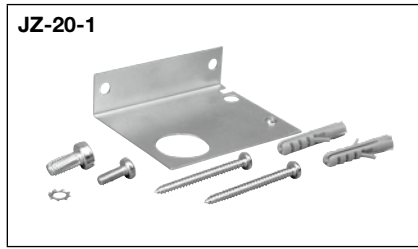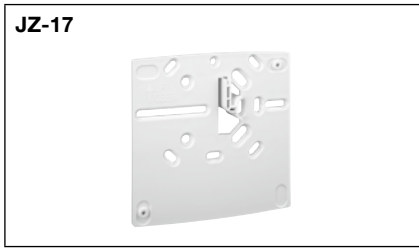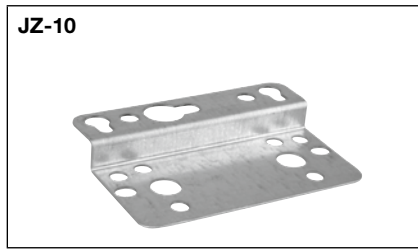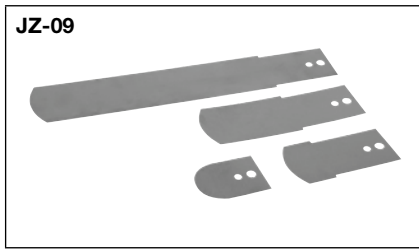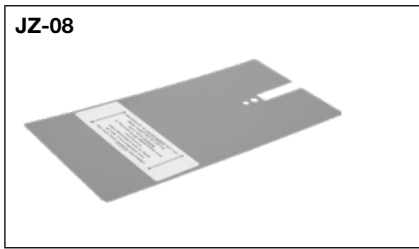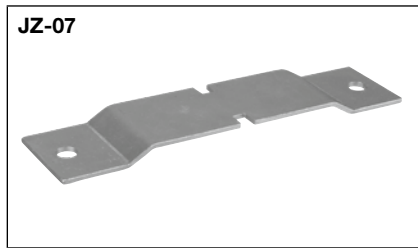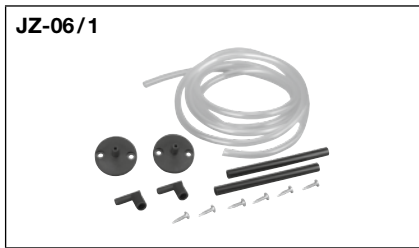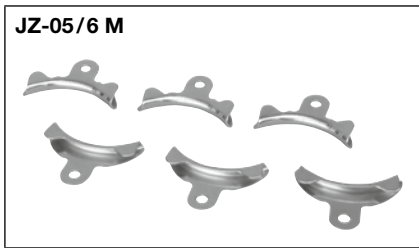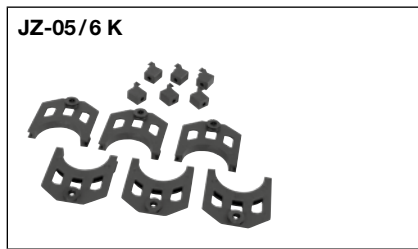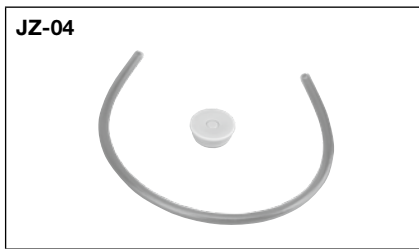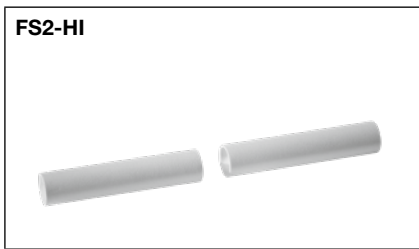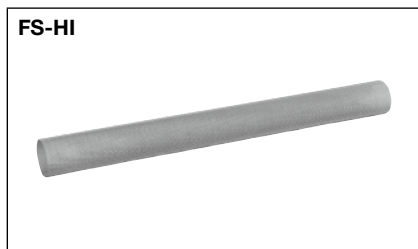

Type comparison overview

Flush-mounted mechanical room temperature controllers old (FTR) and new (RTBSU):

Old item no.	Old type	New item no.	New type	Remarks
UA010017	FTR 101.000#00	UA090000	RTBSU-401.000#00	
UN010009	FTR 101.000#21	UA090014	RTBSU-401.000#21	
UA010134	FTR 101.002#00	UA090001	RTBSU-401.002#00	
UA010222	FTR 101.010#00	UA090002	RTBSU-401.010#00	
UA012404	FTR 101.034#07	UA090004	RTBSU-401.034#00	+ JZ-016.000
UA012405	FTR 101.034#55	UA090004	RTBSU-401.034#00	+ JZ-016.100
UA010702	FTR 101.052#21	UA090015	RTBSU-401.052#21	
UA010811	FTR 101.062#00	UA090003	RTBSU-401.062#00	
UA011000	FTR 101.063#00	UA090006	RTBSU-401.063#00	
UA010910	FTR 101.065#00	UA090007	RTBSU-401.065#00	
UA010415	FTR 101.075#00	UA090008	RTBSU-401.075#00	
UA010615	FTR 101.086#00	UA090009	RTBSU-401.086#00	
UN010607	FTR 101.086#21	UA090016	RTBSU-401.086#21	
UA012008	FTR 101.202#00	UA090010	RTBSU-401.202#00	
UN102009	FTR 101.202#21	UA090010	RTBSU-401.202#00	+ JZ-001.000 + JZ-090.900
UA012301	FTR 101.210#00	UA090011	RTBSU-401.210#00	
UA012500	FTR 101.262#00	UA090012	RTBSU-401.262#00	
UA012501	FTR 101.262#21	UA090012	RTBSU-401.262#00	+ JZ-002.000 + JZ-090.900
UA012600	FTR 101.265#00	UA090017	RTBSU-401.265#00	
UA013000	FTR 101.902#07	UA090013	RTBSU-401.902#07	

Terminal strip for heating manifold:

Old item no.	Old type	Remarks	New item no.	New type	Remarks
DA480500	VOOPL-215.000	5-channel, IP20	DA480510	VOOPL-216.176	6-channel, IP 20
DA480200	VOOPD-215.000	5-channel, IP65	DA480510	VOOPL-216.176	6-channel, IP 20
DA480400	VOOPL-318.000	8-channel, IP20	DA480520	VOOPL-318.178	8-channel, IP 20
DA480300	VOOPD-318.000	8-channel, IP65	DA480520	VOOPL-318.178	8-channel, IP 20

Plant room thermostat old (JET-4x/ JET-3x) and new (RTKSA):

Old alre types	Control range	Hysteresis	New alre types	Control range	Hysteresis
JET-40	0...+35 °C	1 K	RTKSA-100.010	-10...+40 °C	1.3 K
JET-40F	0...+35 °C	1 K	RTKSA-101.010	-10...+40 °C	1.3 K
JET-41	0...+70 °C	2 K	RTKSA-100.110	0...+50 °C	1.3 K
JET-41F	0...+70 °C	2 K	RTKSA-101.110	0...+50 °C	1.3 K
JET-30	10...45 °C (external) TR 0...35 °C (internal) TW	approx. 1 K	RTKSA-114.110	0...+50 °C (internal) TW	1.3 K
JET-31	10...+45 °C (internal) TW 0...+35 °C (internal) TW	approx. 1 K		0...+50 °C (internal) TW	

TR = temperature controller, TW = temperature monitor

Type comparison overview

Boiler/ventilation thermostats (old) (KR/LR) and universal capillary thermostat (new) (RTKSA):

Old alre types	Control range	Hysteresis	New alre types	Control range	Hysteresis	Accessories			
KR 80.312	fixed at 100 °C	-20 K	RTKSA-003.310	20... 150 °C	-10 K	THK-2-100 + JZ-29			
LR 80.312	fixed at 100 °C	-20 K				SWK-2-100			
KR 80.318	fixed at 100 °C	-20 K				THK-2-200 + JZ-29			
LR 80.318	fixed at 100 °C	-20 K				SWK-2-200			
KR 80.309	fixed at 75 °C	-20 K				THK-2-100 + JZ-29			
LR 80.309	fixed at 75 °C	-20 K				SWK-2-100			
KR 80.310	fixed at 75 °C	-20 K				THK-2-200 + JZ-29			
LR 80.310	fixed at 75 °C	-20 K				SWK-2-200			
KR 80.206	30... 65 °C	-8 K	RTKSA-002.410	30... 110 °C	-10 K	THK-2-100 + JZ-29			
KR 80.206 IP54	30... 65 °C	-8 K				THK-2-100 + JZ-29			
KR 80.207	60... 95 °C	-8 K				THK-2-100 + JZ-29			
LR 80.207	60... 95 °C	-8 K				SWK-2-100			
KR 80.208	85... 120 °C	-8 K	RTKSA-002.310	20... 150 °C	-10 K	THK-2-100 + JZ-29			
KR 80.202	95... 130 °C	-8 K				THK-2-100 + JZ-29			
KR 80.203	95... 130 °C	-8 K				THK-2-200 + JZ-29			
LR 80.203	95... 130 °C	-8 K				SWK-2-200			
KR 80.203 IP54	95... 130 °C	-8 K				THK-2-200 + JZ-29			
WR 81.029-1	0... 35 °C	0.5... 1 K				-			
KR 80.003-1	0... 35 °C	1 K	RTKSA-000.100	0... 50 °C	1.3 K	THK-2-120 + JZ-29			
LR 80.003-1	0... 35 °C	1 K				SWK-2-120			
WR 81.009-2	0... 70 °C	1... 2 K	RTKSA-000.200	0... 120 °C	3 K	-			
KR 80.035-2	0... 70 °C	2 K				THK-2-100 + JZ-29			
KR 80.027-5	0... 70 °C	5 K				THK-2-100 + JZ-29			
LR 80.027-5	0... 70 °C	5 K				SWK-2-100			
LR 80.035-2	0... 70 °C	2 K				SWK-2-100			
KR 80.028-2	0... 70 °C	2 K				THK-2-200 + JZ-29			
LR 80.028-2	0... 70 °C	2 K				SWK-2-200			
KR 80.029-2	0... 70 °C	2 K				THK-2-280 + JZ-29			
KR 80.029-2 V4A	0... 70 °C	3 K				NTHK-2-280 + JZ-29			
LR 80.029-2	0... 70 °C	2 K				SWK-2-280			
KR 80.011-1 V4A	10... 45 °C	1 K				NTHK-2-120 + JZ-29			
KR 80.009-1 V4A	10... 45 °C	1 K				NTHK-2-200 + JZ-29			
KR 80.000-5	35... 95 °C	5 K				THK-2-100 + JZ-29			
KR 80.001-5	35... 95 °C	5 K				THK-2-200 + JZ-29			
KR 80.001-5 V4A	35... 95 °C	5 K				NTHK-2-200 + JZ-29			
KR 80.008-8	40... 110 °C	8 K				THK-2-100 + JZ-29			
KR 80.006-8	50... 130 °C	8 K				RTKSA-000.300	20... 150 °C	9.1 K	THK-2-100 + JZ-29

Type comparison overview

Boiler/ventilation thermostats (old) (KR/LR) and universal capillary thermostat (new) (RTKSA):

Old alre types	Control range	Hysteresis	New alre types	Control range	Hysteresis	Accessories
WR 81.101-1	0...35 °C	0.5...1 K	RTKSA-001.100	0...50 °C	1.3 K	-
WR 81.129-1	0...35 °C	0.5...1 K				-
KR 80.108-1	0...35 °C	1 K				THK-2-120 + JZ-29
LR 80.108-1	0...35 °C	1 K				SWK-120
KR 80.109-1	0...35 °C	1 K				THK-2-200 + JZ-29
LR 80.109-1	0...35 °C	1 K				SWK-2-200
WR 81.115-5	0...70 °C	4 K	RTKSA-001.200	0...120 °C	3 K	JZ-31
WR 81.109-2	0...70 °C	1...2 K				-
KR 80.116-2	0...70 °C	2 K				THK-2-100 + JZ-29
LR 80.116-2	0...70 °C	2 K				SWK-2-100
KR 80.111-3	0...80 °C	1 K				THK-2-100 + JZ-29
KR 80.120-1	10...45 °C	1 K				THK-2-200 + JZ-29
LR 80.120-1	10...45 °C	1 K				SWK-2-200
KR 80.100-5	35...95 °C	5 K				RTKSA-001.301
KR 80.100-5 IP54	35...95 °C	5 K	NTHK-2-100 + JZ-29			
KR 80.101-5	35...95 °C	5 K	THK-2-200 + JZ-29			
LR 80.101-5	35...95 °C	5 K	SWK-2-200			
KR 80.124-5	35...95 °C	5 K	THK-2-280 + JZ-29			
KR 80.112-5	35...95 °C	8 K	RTKSA-001.300	20...150 °C	9.1 K	THK-2-600 + JZ-29
KR 80.102-8	40...110 °C	8 K				THK-2-100 + JZ-29
KR 80.103-8	40...110 °C	8 K				THK-2-200 + JZ-29
WR 81.117-5	50...130 °C	4 K				JZ-31
KR 80.006-8	50...130 °C	8 K				THK-2-100 + JZ-29

Frost protection thermostat old (JTF-1xx) and new (RTKSA):

Old alre types	Capillary length	General features	New alre types	Capillary length	General features
JTF-101	6 m	Degree of protection: IP 54 Hysteresis: approx. 1 K Control range: -8...+8 °C Tmax sensor: 150 °C	RTKSA-204.200	6 m	Degree of protection: IP 40 Hysteresis: approx. 1.5 K Control range: -10...+15 °C Tmax sensor: 120 °C
JTF-103	1.8 m		RTKSA-204.000	1.8 m	
JTF-105	3 m		RTKSA-204.100	3 m	
JTF-112	12 m		RTKSA-204.300	12 m	

Tips for heating installers and electricians

Berlin 1000/2000/3000 – bimetal

Problem	Cause
Large temperature variation present in the room (approx. 5–8 K).	<ol style="list-style-type: none"> 1.) The neutral conductor N is not connected to terminal 4 of the controller. 2.) The neutral conductor N is connected to terminal 4 of the controller, but not in the distribution system (distribution box, fuse box).
The setting knob (setpoint transmitter) must be set higher than the desired room temperature.	<ol style="list-style-type: none"> 1.) Incoming and outgoing (switched) phase have been interchanged. As a result, the feedback resistor continuously carries a voltage and acts like a temperature reducer in the room. Moreover, the temperature variation is very high (approx. 5–8 K) 2.) The heating output is dimensioned too low for the room. As a result of this, the power-on time of the controller is too long; the feedback resistor is thus switched on for too long and acts as a temperature reducer in the room. 3.) External heat sources are influencing the controller (for example, the sun, TV, lamp etc.). These external heat sources cause the controller to register a higher-than-actual temperature and, as a result, the room is not heated sufficiently.
The setting knob (setpoint transmitter) must be set lower than the desired room temperature.	<ol style="list-style-type: none"> 1.) The controller has been installed, for example, behind a curtain or on an outer wall or next to a door. The controller registers a lower-than-actual temperature and, as a result, the room is overheated.
The room does not become warm.	<ol style="list-style-type: none"> 1.) Faulty actuator element, actuator element does not open the valve. 2.) There may be coarse construction site dirt in the controller. This dirt is preventing the contact from closing. 3.) The controllers of two rooms have been connected in series. These rooms only become warm when both controller contacts are closed.

Other notes:

- 1.) Particularly with floor heating, it is important to remember that there are very long reaction times. Therefore, the room heats up very slowly and also cools slowly (incident sunlight, for example, results in overheating). Therefore, do not expect that a cold room will reach the desired room temperature within a short time after having set the adjusting knob to a high value.
- 2.) Also, with well insulated rooms, remember that the room temperature drops very slowly. As a result, it can happen that at night, despite "Reduced operation" (for example, 4 K lower), the room temperature drops only a little and the heating therefore does not get activated for a prolonged time.
- 3.) Very often, the function of bimetal controllers is impaired or rendered completely useless by construction site dirt that has penetrated into them. Therefore, the controllers should be installed only after any required spatula, painting or wallpapering work. Avoid drilling dust without fail.

Plant engineering

Note for connecting industrial thermostats and controllers to PLC or DDC:

For connecting industrial thermostats and controllers to programmable logic controllers (PLC) or direct digital controls (DDC), the use of normal commercial coupling relays with 230 V~ coil voltage and gold-plated switching contacts is recommended.



Ecodesign Directive

The Ecodesign Directive (EU 2015/1188) lays down requirements for the placing on the market and putting into service of household local space heaters. The Directive entered into force on 10/08/2015 with a transitional period until 01/01/2018. The aim of the Directive is the environmentally compatible design and labelling of local space heaters and the associated reduction of energy consumption.










aire welcomes this development and the demand for energy-saving control technology. The development and production of innovative and products optimised for energy consumption has been our calling for almost 50 years.

The Directive distinguishes between different types of heating, electric local space heaters and local space heaters for gaseous or liquid fuels. The electric local space heaters are additionally subdivided into:

- portable local space heaters;
- fixed local space heaters;
- Storage local space heaters;
- underfloor local space heaters;
- Radiant local space heaters.

Central space heaters that distribute heat to different rooms via a liquid medium are not affected by this regulation.

The following table lists the products that comply with the Directive for use in portable local space heaters, fixed local space heaters and underfloor local space heaters. If you have any questions about suitable products for other types of heating, please do not hesitate to contact us.

Products / Product groups	Electric local space heaters		
	Portable	Fixed	Underfloor
HTRRUu 210.021 see page 94–97 	✓	✓	✓
HTRRBu 110.1xx/21 see page 72 	✓	✓	✓
Wireless system without weekly programme Actuators: HTRFB, HTFRA, HTRFU, HTFRE Sensors: FTRFB see Smarthome/Wireless chapter 	✓		
Wireless system with weekly programme* Actuators: HTRFB, HTFRA, HTRFU, HTFRE Sensors: FTRFB, FTRFBu, FTRFUd see Smarthome/Wireless chapter 	✓	✓	✓
b@home system see Smarthome/Wireless chapter 	✓	✓	✓
RTBSU-401.xxx RTBSB-001.xxx RTBSB-001.4xx see Heating Technology chapter 	✓		
RTBSU-401.xxx or RTBSB-001.xxx (variants with clock input) in conjunction with clock thermostat** see Heating Technology chapter 	✓	✓	✓
FETR-101.7xx HTRRB-01x.xxx see Heating Technology chapter 	✓		
FETR-101.7xx or HTRRB-01x.xxx in conjunction with clock thermostat** see Heating Technology chapter 	✓	✓	✓

* Sensors with clock required in each room or master-slave control with central clock programme (transfer of central sensor functions with clock).

** Transfer of clock thermostat functions via clock output to the corresponding clock input of other thermostats.

Funding opportunities with the BAFA subsidy programme

Heat intelligently: Secure a subsidy of 30 percent for the optimisation of your heating system now.

Obsolete technology and non-coordinated plant components often lead to excessive energy consumption. However, many homeowners shy away from renovating their heating systems because they fear high costs.


For this reason, the German Federal Office for Economic Affairs and Export Control (BAFA) has launched a subsidy programme for heating optimisation. The aim of the subsidy programme is to motivate homeowners to renew their heating systems with attractive, non-repayable subsidies. Among other things, this is intended to make an important contribution to the environmentally friendly supply of heat in Germany.

What is subsidised? And does the subsidy also apply to alre products?

Within the framework of BAFA subsidies, two measures for heating optimisation are subsidised at 30 percent by the state:

- 1st Replacement of heating circulation pumps and hot water circulation pumps by more efficient pumps**
- 2nd Hydraulic balancing (heating system must be at least two years old)**

For heating optimisation by **hydraulic adjustment**, you can also have our energy-saving **alre controllers (from RTBSU-401 to the b@home system)** installed by a specialist technician. The acquisition and installation costs are also subsidized at 30 percent.

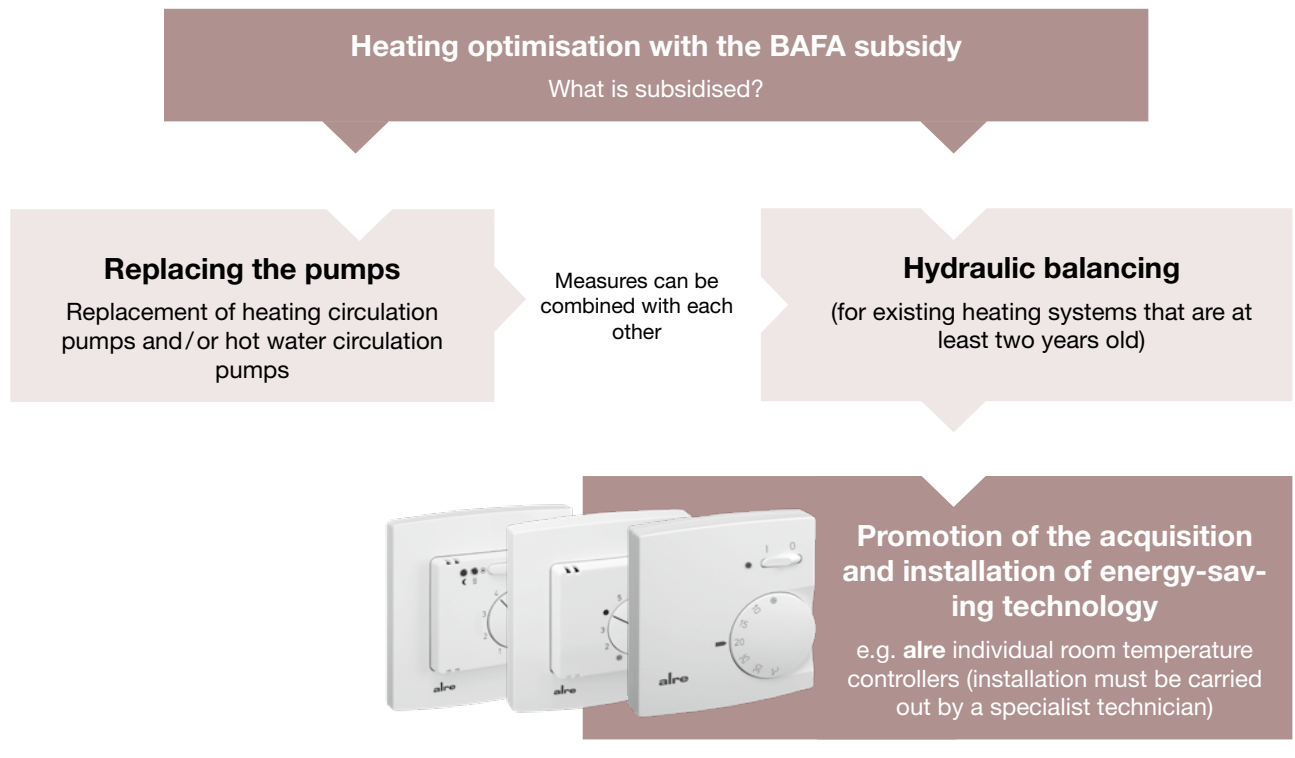



Who can apply for the subsidy?

In principle, private individuals, companies, freelancers, municipalities, regional authorities and special-purpose associations as well as other legal entities under private law (in particular associations, foundations, non-profit organisations or cooperatives) are entitled to support. The German Federal Government, German Federal States and their institutions are excluded from funding.



Further information on the BAFA subsidy programme can be found at www.bafa.de

Sensor characteristic curves – table of sensor values

Temperature	PT 100	PT 1000	NI 1000
°C	Ω	Ω	Ω
-50	80.30	803.00	742.55
-45	82.30	823.00	766.76
-40	84.30	843.00	791.31
-35	86.20	862.00	816.21
-30	88.20	882.00	841.46
-25	90.20	902.00	867.04
-20	92.20	922.00	892.96
-15	94.10	941.00	919.22
-10	96.10	961.00	945.82
-5	98.00	980.00	972.74
0	100.00	1000.00	1000.00
5	102.00	1020.00	1027.59
10	103.90	1039.00	1055.52
15	105.80	1058.00	1083.77
20	107.80	1078.00	1112.36
25	109.70	1097.00	1141.29
30	111.70	1117.00	1170.56
35	113.60	1136.00	1200.16
40	115.50	1155.00	1230.11
45	117.50	1175.00	1260.41
50	119.40	1194.00	1291.05
55	121.30	1213.00	1322.05
60	123.20	1232.00	1353.40
65	125.50	1252.00	1385.12
70	127.10	1271.00	1417.21
75	129.00	1290.00	1449.67
80	130.90	1309.00	1482.50
85	132.80	1328.00	1515.73
90	134.70	1347.00	1549.34
95	136.60	1366.00	1583.36
100	138.50	1385.00	1617.79
105	140.40	1404.00	1652.62
110	142.30	1423.00	1687.89
115	144.20	1442.00	1723.58
120	146.10	1461.00	1759.72
125	148.00	1480.00	1796.30
130	149.80	1498.00	1833.35
140	153.60	1536.00	1908.87
150	157.30	1573.00	1986.35



Sensor characteristic curves – table of sensor values

Temperature °C	Sensor 0 NTC 2K25 Ω	Sensor 1 NTC 1K0 Ω	Sensor 2 NTC 47K Ω	Sensor 3 NTC 8K Ω	Sensor 4 NTC 10K Ω	Sensor 5 NTC 50K Ω	Sensor 6 NTC 100K Ω	Sensor 8 NTC-2K Ω	Sensor 51 KTY 81-121 Ω	Sensor 57 KTY 11-7 Ω
-50	151398	32540	3152409	537827	672283	2820844	8276704	77977	510	1051
-45	106557	24432	2230085	378534	473168	2027885	5751387	57655	535	1103
-40	75923	18515	1595524	269709	337137	1473182	4044707	43039	562	1156
-35	54731	14156	1153886	194427	243033	1080969	2877133	32427	589	1212
-30	39895	10916	843120	141724	177155	800794	2069021	24651	617	1269
-25	29390	8486	622133	104107	130508	598684	1503450	18902	647	1328
-20	21871	6648	463401	77696	97120	451517	1103398	14615	677	1390
-15	16434	5248	348285	58379	72973	343390	817535	11391	708	1453
-10	12462	4172	264028	44269	55337	263262	611269	8947	740	1518
-5	9533	3340	201812	33866	42333	203390	461045	7079	773	1586
0	7355	2691	155480	26126	32658	158300	350656	5642	807	1655
5	5719	2182	120696	20318	25397	124082	268840	4527	842	1726
10	4482	1780	94377	15923	19903	97925	207702	3657	877	1799
15	3539	1460	74314	12570	15713	77789	161654	2973	914	1874
20	2813	1205	58910	9994	12492	62184	126708	2431	951	1951
25	2252	1000	47000	8000	10000	50000	100000	2000	990	2030
30	1814	834	37732	6445	8056	40455	79428	1654	1029	2111
35	1471	699	30472	5224	6530	32910	63489	1376	1070	2194
40	1199	588	24750	4260	5325	26916	51056	1151	1111	2279
45	984	498	20214	3494	4368	22129	41297	967	1153	2366
50	811	423	16597	2882	3602	18285	33591	816	1196	2456
55	673	361	13697	2389	2986	15182	27470	693	1241	2545
60	560	309	11360	1991	2488	12664	22582	590	1286	2638
65	469	266	9466	1667	2084	10612	18656	505	1331	2733
70	395	230	7925	1402	1753	8931	15478	434	1378	2829
75	334	199	6664	1185	1481	7547	12917	374	1426	2928
80	283	173	5627	1006	1258	6404	10821	324	1475	3029
85	241	151	4771	857	1072	5456	9105	282	1525	3131
90	207	133	4062	734	917	4665	7693	246	1575	3236
95	177	117	3471	631	788	4004	6527	215	1627	3342
100	153	103	2978	544	680	3448	5559	189	1679	3451
105	132	91	2563	471	588	2980	4752	167	1732	3561
110	115	81	2215	409	511	2584	4077	147	1786	3674
115	100	72	1919	356	445	2248	3511	130	1841	3788
120	88	64	1669	12	389	1962	3033	116	1896	3905
125	77	57	1456	273	342	1717	2629	103	1950	4023
130	68	51	1274	240	301	1507	2287	91	2003	4143
140	53	41	984	188	235	1171	1745	73	2103	4390
150	42	34	769	148	185	920	1348	60	2189	4644

Technical terms

Range limitation (mechanical):

Below the adjusting knob, there are “setting flags” (red/blue) for mechanically delimiting the min./max. temperature range. In this manner, an undesired mis-setting of the setpoint can be prevented, for example, in children’s rooms or public buildings.

Bimetal:

Thermo-bimetal is generally constructed of layers of metal or alloys of more or less the same thickness, which are firmly joined to one another and have different coefficients of thermal elongation. As a result, they bend under temperature changes, so that upon heating, the side with the component that has a lower heat elongation becomes hollow. The heat is transferred by conduction, radiation or convection from the surroundings (indirect heating).

Defrosting:

Defrosting is the regular de-icing or heating up of the heat exchanger or cooling unit to maintain efficient operation of the system.

Intrinsic safety (JTU, JTL)

Intrinsic safety / protection against cold: The devices are intrinsically safe, i.e., upon loss of the sensor medium owing to sensor rupture, for example, the burner is switched off. Since minus temperatures generate the same effect through volume reduction of the sensor medium, the devices are adjusted by means of the “cold screw” such that they switch off the burner only at temperatures below $-15\text{ }^{\circ}\text{C}$. They can only be switched on again manually at temperatures above approx. $-5\text{ }^{\circ}\text{C}$ by means of the manual reset button.

Air conditioner, 2-pipe fan convector (fan coil):

The 2-pipe air conditioners are supplied with heating or cooling water for heat exchange, depending on the requirement, through the same pipe system via 2 pipes (inflow and outflow).

Air conditioner, 4-pipe fan convector (fan coil):

The 4-pipe air conditioners are supplied with heating or cooling water for heat exchange, depending on the requirement, through a heating circuit and a cooling circuit (4 pipes).

Cooling ceiling:

The cooling ceiling belongs to the group of panel heaters. Cooling ceilings are used often in office spaces for passive cooling. In such systems, cold water (usually at $16\text{ }^{\circ}\text{C}$) flows through a network of pipes and cools the room air. Lower inflow temperatures are not possible because of condensation water formation.

Neutral zone:

The control range in which neither heating nor cooling takes place is called the neutral zone.

Break contact (bimetal):

The control contact opens with increasing temperature and closes at dropping temperature (for “heating”).

Proportional band (p-band):

The proportional band is the range around the target temperature within which the controller delivers a steady output signal. This means that the room temperature is kept more or less constant within the proportional band by the controller (if the heating capacity is sufficient).

2-point control (ON/OFF control):

Control algorithm which, for example, switches off the output when the set temperature is exceeded and switches it on again when the current temperature falls short of the setpoint value. The temperature in the room is always subject to certain variations (control deviations). This deviation results from the switching temperature difference of the controller and the properties of the room, such as heating speed, heat loss etc.

3-point control:

In a 3-point control system, the controller can change between the operating modes heating, neutral zone and cooling.

PWM (pulse width modulation):

Process for generating a continuous-like transmission behaviour in a control path. By varying the power-on time at the input, owing to the time constant of the transmission path, a continuous-like (smooth) signal waveform is generated at its output.

Technical terms

Switching difference (hysteresis):

The difference between the switching on and switching off of the heater or the controller.

a) There is the switching temperature difference of the controller, which depends on the design of the device.

b) There is the switching temperature difference of the room, which is dependent on the behaviour of the entire control path, i.e. on the floor design, the action of external heat sources, the installation location of the controller and the controller itself.

The switching temperature difference always refers to the controller. It does not express the actual switching temperature difference of the control path. The latter changes according to the deployment location and conditions. Any indoor temperature is constantly subject to variations. This deviation results from the switching temperature difference of the controller and the properties of the room, such as heating speed, heat loss etc.

NO contact (bimetal):

NO contact (bimetal): The control contact closes with increasing temperature and opens at dropping temperature (for "cooling").

Toggler (bimetal):

This is a toggler with an NC contact and an NO contact. It operates as described for NC and NC contacts.

Split unit / Multi-split unit:

Split AC units consist of at least two heat exchangers in which one is installed as a vaporiser in the rooms to be cooled and the other serves as a condenser for heat dissipation. Most split units allow reverse operation for heating the rooms if this is required. Multi-split units consist of several vaporisers connected to a condenser (liquefier).

Valve actuator:

Electrical controllable valve for regulating, for example, the hot water flow in heating systems.

A distinction is made here between ON/OFF valve actuators and proportional valve actuators.

Proportional valves are designed for connecting controllers with a continuous control mode.

Continuous control:

The controller provides an analogue output signal. The value of the output signal changes continuously, i.e., without any steps or jumps, in response to the output signal.

Temperature reduction (TR):

The TR is also implemented via a resistor, as is the case with thermal recirculation. This resistor is activated manually or by a timer. As a result, the bimetal is made to feel a simulated temperature that is about 4 K higher than the actual temperature in the room. Consequently, in a room with a controller setting of, for example, 20°C, the temperature in the room can drop to a value 4 K lower, to max. 16°C. If the temperature drops further, the heating system switches on again, and at > 16°C, it gets switched off. The magnitude of the temperature reduction to be actually achieved depends on the insulation of the building and the reduction period (one night, weekend, holiday).

Thermal recirculation (RF):

By means of an additional integrated heating resistor, the controller is made to switch off at the right time during the heating process.

As a result, exceeding the desired room temperature is minimised, and there is a smaller switching difference.

Heat pump:

Rooms can be cooled or heated with heat pumps. Modern systems allow efficient heating and cooling operation since they allow reversible process reversing.

Reversing valve:

A reversing valve (4-way control valve) facilitates a reversing cycle by turning the condenser (liquefier) into an evaporator which causes the cooling unit to heat up or defrost.

Valve protection function

Valve and pump protection serves to prevent the valve seat and/or pumps from corroding during long downtimes. It is recommended to activate valve protection for hot water heating systems. If valve and pump protection is activated, the valve or a heating pump is operated once on Mondays between 1100hrs and 1200hrs for 5 minutes. Valve and pump protection only becomes active if no heating has taken place within the last week. This avoids unnecessary additional heating at times of year when heating is in use and does not affect the control system.

Evaporator / Liquefier:

A liquefier or condenser is a heat exchanger in a cooling unit that liquefies a gaseous medium through the dissipation of heat. Usually, further cooling of the cooling agent takes place in the liquefier. According to the definition of terms in the European Standard EN 378 Part 1, the condenser in cooling units is called the liquefier in order to easily distinguish it from an electrical condenser. The vaporiser implements the opposite process, evaporating the liquid medium by heating it up.

Index by product designations

Product	Type	PG	Page
Accessories	Accessories		209–223
Adaptation list for flush-mounted controllers (RTBSU)	Adaptation list, flush-mounted		86
Adaptation list for flush-mounted controllers (HTRRUu)	Adaptation list, flush-mounted		97
Adaptation list for flush-mounted controllers (KTRRUu)	Adaptation list, flush-mounted		132
Air heater thermostat, capillary system, 2 functions	JTL-2 ... -11	II	178–179
Air heater thermostat, capillary system, 3 functions	JTL-8 NR ... -17 NR	II	178–179
BACnet individual room controller	KTRBUu ...	IV	51
Ball impact/sunlight/rain protection	S protection 01	III	222
b@home	Individual components, system information	I	12–36
Cable temperature sensor	KF	III	206
Climate controllers, electronic (flush-mounted) with clock	KTRRUu	I	127–131
Climate controllers, electronic with triac output	KTRTB	I	115
Climate controllers for cooling ceilings, electronic	KTRRU ...	I	123–126
Climate controllers, mechanical (surface-mounted)	KTBSB	I	116–117
Clock thermostats, electronic (surface-mounted) for room temperature control	HTRRBu ...	I	72–73
Clock thermostats, electronic (surface-mounted) for floor heating systems	HTRRBu ...	I	100–101
Contact temperature sensor with passive output	ALF	III	207
Contact thermostats, capillary system	ATR 83	II	171
Continuous room temperature controller, electronic, internal or external sensor	KTRVB ...	I	133–134
Control cabinet hygrostat	RFHSS	II	183
Control cabinet thermostats	RTBSS	II	182
Controllers for distributor assembly (hat rail), electronic	ITR 79	II	184–185
Cooling ceiling controllers, electronic (surface-mounted)	KTRRB-05 ...	I	120–122
Cover sets for flush-mounted controllers (heating technology)	JZ-0 ...	I	82
Cover sets for flush-mounted controllers (air-conditioning technology)	JZ-0 ...	I	125
Cover sets for RTBSU in 50 x 50 mm and 55 x 55 mm	Cover sets for RTBSU	I	82
Dew point monitors, electronic	WFRRN	I	135
Dew point sensor	TPS	I	53, 121, 136–137
Differential pressure switch, adjustable	JDL-111 ... -117	III	190–191
Differential pressure switch, adjustable	JDW-3/-5/-10	II	190–191
Duct hygrostat, 1-stage and 2-stage	HI	II	187–188
Duct thermostat, capillary system	JTU-1 ... -50	II	180–181
Electrothermal valve actuators	ZBOOA ...	I	54
Floor temperature controllers, electronic (surface-mounted)	HTRRB ...	I	28–31
Floor temperature controllers, electronic (flush-mounted)	FETR	I	98–99
Flow monitors, mechanical	JSF-1E ... 4E/ ... RE	II	192–194
Flow monitors, mechanical	JSW	III	195–196
Flush-mounted thermostats, electronic, with clock, room or floor	HTRRUu ...	I	94–97
Flush-mounted thermostats, mechanical	RTBSU	I	76–93
Frames for mounting all 50 x 50 flush-mounted units	Frame	I	81
Frost protection thermostats, capillary system, switching	RTKSA/JTF-1 ... - 25	II	159
Heat conduction paste	WP-01	II	222
Hygrostat (flush-mounted)	FHY 101.060	I	102–105
Hygrostats (surface-mounted)	RFHSB	I	138–140
Hygro-thermostat (surface-mounted)	RKDSB	I	138–140

Index by product designations

Product	Type	PG	Page
Immersion sleeves for capillary/frost protection thermostats and sleeve sensors (Ø 7 mm)	NTH/TH	II	220
Immersion sleeves for capillary/frost protection thermostats and sleeve sensors (Ø 7 mm)	TH/NTH	II	220
Immersion sleeves for HF, EKF, IKF (Ø 6 mm)	THMs/THV	II	221
Immersion sleeves for RTKSA	NTHK/THK	II	218
Integrated duct temperature sensor with passive output	EKF	III	210
Mounting flange for EKF, IKF	MF	III	221
Outdoor temperature sensor with passive output, sensor sleeve lead-out	AFH	III	204
Outdoor temperature sensor with passive output, internal sensor	AF	III	203
Pendulum temperature sensors	PF	III	208
Plug-in socket	JZ-19	I	70
Protective sleeve for screed mounting of sleeve sensor HF/cable sensor KF (Ø 7.7 mm)	THF	II	220
Protection coil for sleeve and cable sensors	SW-200/SW-200-12	II	218-219
Protection coil for RTKSA	SWK	II	218-219
radiation temperature sensor	STF	III	209
Room temperature/climate controllers, electronic (surface-mounted)	KTRRB-117 ...	I	118
room temperature controller, flush-mounted	FUF	III	202
Room temperature controllers, mechanical (surface-mounted), design "Berlin 1000"	RTBSB-201 ...	I	67-69
Room temperature controllers, mechanical (surface-mounted), design "Berlin 2000"	RTBSB-001 ...	I	70-71
Room temperature controllers, mechanical (surface-mounted plug) for mobile heaters	RTBSB-001.4 ...	I	70-71
Room temperature sensor, surface-mounted	BTF2	III	200
Sauna controllers	SAUNATHERM VU/HYGROTHERM VU	III	216-217
Single-stage industrial thermostats, capillary system, external sensor	JET-1 ... R	II	167
Single-stage plant room thermostats, capillary system, external sensor	RTKSA	II	156
Single-stage industrial thermostats, capillary system, 2 separate setting ranges, external sensor	JET-30/-31	II	158
Single-stage capillary thermostats	JET-1 ...	II	168
Technical terms	Technical terms		
Terminal strip for heating manifold	VOOPL	I	107-109
Terminal strip for heating manifold with heating/cooling toggling	VOORL	I	141-143
Tips for heating installers and electricians	Tips		
Transducer "differential pressure - air"	MDEKD ...	III	212
Two-stage capillary thermostat	JMT-206 x	II	170
Universal capillary thermostats as boiler, ventilation or contact controller (TR/TW/TB/STB/STW)	RTKSA	II	160-163
Universal capillary double thermostats as boiler, ventilation or contact controller (TR/TW/TB/STB)	RTKSA	II	165-167
Universal controllers, electronic, remote sensor, single-stage	ETR 77	II	186
Wet room controller/double thermostat, bimetal	PTR 40	II	106, 144
Wind indicator relays, mechanical for air duct	JSL-1E	II	189
Wireless actuators heating (1/4/8-channel)	HTFR.../HTFMA...	I	22-29
Wireless actuators heating/cooling (4/8-channel)	KTFRL...	I	172-177
Wireless temperature sensors without clock/with clock/ b@home contact sensor/repeater	FTRFB.../FTRFBu.../FTRFud.../ MBAFA.../MRCOA...	I	34-35

Index by type designations

Type	PG	Product	Page
Accessories		Accessories	209–223
Adaptation list, flush-mounted		Adaptation list for flush-mounted controllers (RTBSU)	86
Adaptation list, flush-mounted		Adaptation list for flush-mounted controllers (HTRRUu)	97
Adaptation list, flush-mounted		Adaptation list for flush-mounted controllers (KTRRUu)	132
AF	III	Outdoor temperature sensor with passive output, internal sensor	203
AFH	III	Outdoor temperature sensor with passive output, sensor sleeve lead-out	171
ALF	III	Contact temperature sensor with passive output	207
ATR 83	II	Contact thermostats, capillary system	171
BTF2	III	room temperature sensor, surface-mounted	200
Cover sets for RTBSU	I	Cover sets for RTBSU in 50 x 50 mm and 55 x 55 mm	82
EKF	III	Integrated duct temperature sensor with passive output	210
ETR 77	II	Universal controllers, electronic, remote sensor, single-stage	186
FETR	I	Floor temperature controllers, electronic (flush-mounted)	102–105
FHY 101.060	I	Hygrostat (flush-mounted)	138–140
FTRCUd	I	Wireless control – central components, b@home control unit	20–21
FTRFB.../FTRFBu.../FTRFUd.../ MBAFA.../MRCOA...	I	Wireless sensors without clock/with clock, contact sensor b@home/repeater	22–27
FUF	III	Room temperature sensor (flush-mounted)	202
HI	II	Duct hygrostat, 1-stage and 2-stage	187–188
HTFR...	I	Wireless actuators heating (1/4/8-channel)	28–32
HTRRB...	I	Floor temperature controllers, electronic (surface-mounted)	98–99
HTFMA	I	Radio-controlled heating, motorised actuator	28–32
HTRRBu...	I	Clock thermostats, electronic (surface-mounted) for room temperature control	72–73
HTRRBu...	I	Clock thermostats, electronic (surface-mounted) for floor heating systems	100–101
HTRRUu...	I	Flush-mounted thermostats, electronic, with clock, room or floor	94–97
IKF1	III	Industrial integrated duct sensor with passive output	211
ITR 79	II	Controllers for distributor assembly (hat rail), electronic	184–185
JDL-111...-116	II	Differential pressure switch, adjustable	190
JDW-3/-5/-10	II	Differential pressure switch, adjustable	190
JET-1...R	II	Single-stage industrial thermostats, capillary system, external sensor	167
JET-1...	II	Single-stage capillary thermostats	168
JET-30/-31	II	Single-stage industrial thermostats, capillary system, 2 separate setting ranges, external sensor	158
JMT-206 x	II	Two-stage capillary thermostats	170
JSF-1E...4E/...RE	II	Flow monitors, mechanical	192–194
JSL-1E	II	Wind indicator relays, mechanical for air duct	189
JSW	III	Flow monitors, mechanical	195–196
JTF-1...-25	II	Frost protection thermostats, capillary system, switching	175–177
JTL-2...-11	II	Air heater thermostat, capillary system, 2 functions	178–179
JTL-8 NR...-17 NR	II	Air heater thermostat, capillary system, 3 functions	178–179
JTU-1...-50	II	Duct thermostat, capillary system	180–181
JZ		Accessories	222
JZ-0...	I	Cover sets for flush-mounted controllers (heating technology)	82
JZ-0...	I	Cover sets for flush-mounted controllers (air-conditioning technology)	125
JZ-19	I	Plug-in socket	70
KF	III	Cable temperature sensor	206
KTBSB	I	Climate controllers, mechanical (surface-mounted)	116–117
KTFRL...	I	Wireless actuators heating/cooling (4/8-channel)	34–35
KTRBUu	IV	BACnet individual room controller	51–55
KTRRB-05...	I	Cooling ceiling controllers, electronic (surface-mounted)	1
KTRRB-117...	I	Room temperature/climate controllers, electronic (surface-mounted)	118

Index by type designations

Type	PG	Product	Page
KTRRU ...	I	Climate controllers for cooling ceilings, electronic	123–126
KTRRUu	I	Climate controllers, electronic (flush-mounted) with clock	127–131
KTRTB	I	Climate controllers, electronic with triac output	115
KTRVB ...	I	Continuous room temperature controller, electronic, internal or external sensor	133–134
MBAFA	I	Contact sensor b@home	24
MDEKD ...	III	Transducer “differential pressure – air”	212
MF	III	Mounting flange for EKF, IKF	221
MGCBB	I	Wireless control - central components, b@home gate	20
MRCOA-014.201	I	Wireless repeater	25
NTH/TH	II	Immersion sleeves for capillary/frost protection thermostats and sleeve sensors (Ø 7 mm)	220
NTHK/THK	II	Immersion sleeves for RTKSA	218
PF	III	Pendulum temperature sensors	208
PTR 40	II	Wet room controller, bimetal	159
Frame	I	Frames for mounting all 50 x 50 flush-mounted units	81
RFHSB	I	Hygrostats (surface-mounted)	138–140
RFHSS	II	Control cabinet hygrostat	183
RKDSB	I	Hygro-thermostat (surface-mounted)	138–140
RTBSB-001.4 ...	I	Room temperature controllers, mechanical (surface-mounted plug) for mobile heaters	70–71
RTBSB-001 ...	I	Room temperature controllers, mechanical (surface-mounted), design “Berlin 2000”	61–66
RTBSB-201 ...	I	Room temperature controllers, mechanical (surface-mounted), design “Berlin 1000”	67–69
RTBSS	II	Control cabinet thermostats	182
RTBSU	I	Flush-mounted thermostats, mechanical	76–93
RTKSA-00x.xxx	II	Universal capillary thermostat	160–163
RTKSA-01x.xxx	II	Universal capillary double thermostat	165–167
RTKSA-10x.xxx	II	Plant room thermostat	156–157
RTKSA-114.xxx	II	Plant room double thermostat	158
RTKSA-20x.xxx	II	Frost protection thermostat	172–174
SAUNATHERM VU/HYGROTHERM VU	III	Sauna controllers	216–217
S protection 01	III	Ball impact/sunlight/rain protection	222
STF	III	radiation temperature sensor	209
SW-200/SW-200-12	II	Protecting coil for capillary thermostats, sleeve sensors and air sensors	218–219
SWK	II	Protection coil for RTKSA	218–219
Technical terms		Technical terms	
TH/NTH	II	Immersion sleeves for capillary/frost protection thermostats and sleeve sensors (Ø 7 mm)	220
THF	II	Protective sleeve for screed mounting of sleeve sensor HF/ cable sensor KF (Ø 7.7 mm)	220
THK/NTHK	II	Immersion sleeves for RTKSA	218
THMs/THV	II	Immersion sleeves for HF, EKF, IKF, KF (Ø 6 mm)	221
Tips		Tips for heating installers and electricians	
TPS	I	Dew point sensor	53, 121, 136–137
Type comparison		Old/new capillary thermostats from the plant engineering field	
VOOPL	I	Terminal strip for heating manifold	107–109
VOORL	I	Terminal strip for heating manifold with heating/cooling toggling	141–143
WFRRN	I	Dew point monitors, electronic	135
WP-01	II	Heat conduction paste	22
ZBOOA...	I	Electrothermal valve actuators	106, 144

ALRE-IT Terms and Conditions of Sale and Supply (Updated 2019)

1. General

In addition to the General Terms and Conditions of Delivery for Products and Services of the Electrical Industry and the Green Terms and Conditions of Delivery as of 2018 (hereinafter referred to as 'GL'), the following provisions shall apply to all business relations with our customers who are contractors, legal entities under public law or special funds under public law (hereinafter referred to as 'Customer'). These can be viewed and downloaded on our website at www.alre.de. We are the 'Supplier' as defined by the GL.

2. Quotations

2.1. Our offers are subject to change and without obligation, unless we have expressly designated them as binding.

2.2. Declarations of acceptance and purchase orders need our written confirmation for them to become legally valid; the same applies to supplements, changes and subsidiary agreements. Drawings, illustrations, dimensions and other performance data are only binding if they are agreed expressly in writing.

3. Prices and price adjustment

3.1. In addition to the regulations in Art. II (1) of the GL, freight, insurance and customs costs are not included in the prices.

3.2. Price changes caused by changes to the contract product or by changes to the requirements of the contract product are negotiated and determined on the basis of a joint cost analysis.

4. Deadlines for delivery / delay

In addition to the regulations in Art. IV (2) of GL, we will inform the Customer immediately if the service is not available within the extended delivery periods. In this case we shall be entitled to withdraw from the contract in whole or in part. Any consideration already rendered by the Customer shall be reimbursed by us without delay. The case of non-availability of the service in this sense shall include in particular the failure of our suppliers to deliver to us on time if we have concluded a congruent hedging transaction or if neither we nor our suppliers are at fault.

5. Liability

5.1. In principle, our liability is based on GL, in particular Art. XII.

5.2. Deviating from Art. IV (4) and Art. XI (1), and in addition to Art. VIII (10) and Art. XI (1) of GL, we, our legal representatives, executive employees or agents shall be liable under this contract for minor negligence in the event of a breach of an 'essential' obligation under this contract. 'Essential' obligations are those obligations which are necessary for the performance of the contract and the breach of which would jeopardise the achievement of the purpose of the contract and on the observance of which the Customer may therefore regularly rely. In these cases liability is limited to typical and foreseeable damages.

6. Packaging

The packaging will not be taken back, unless this is required by law.

7. Terms of payment

In addition to Article II of GL, the following provisions shall apply:

7.1. Our invoices are payable within 30 days from the date of invoice. For payment within 14 days we grant a discount of 2%.

7.2. The Customer shall be in default upon expiry of the aforementioned payment period. The amount to be paid shall bear interest during the period of default at the applicable statutory default interest rate. We reserve the right to assert further claims for damages caused by default.

7.3. We are entitled to make a delivery in whole or in part only against advance payment or cash on delivery. We will declare corresponding reservations at the latest with the order confirmation.

7.4. If it becomes apparent after conclusion of the contract (e.g. by filing for insolvency proceedings) that our claim to payment is at risk due to the purchaser's inability to pay, we shall be entitled – if applicable, after setting a deadline (Section 321 of the German Civil Code – BGB) – to withdraw from the contract in accordance with the statutory provisions on refusal of performance.

7.5. The Customer shall only be entitled to retention rights to the extent that his claim has been legally established or is undisputed. In the event of defects in the delivery, the Customer's counter rights, in particular the rights under Art. VIII (4) of the GL, remain unaffected.

8. Material defects

8.1. Supplementary to Art. VIII of GL, the purchaser's claims for defects presuppose that it has complied with its statutory obligations to inspect and give notice of defects (Sections 377, 381 of the German Commercial Code – HGB). The Customer must inspect the goods immediately after delivery. Obvious defects must be reported in writing by the Customer immediately, on the 7th day at latest. If a hidden defect only becomes apparent at a later date, the Customer must nevertheless notify us of this in writing immediately after becoming aware of it.

8.2. Supplementary to Art. VIII of GL, there shall be no warranty claims if our operating or assembly instructions are not followed, changes or repair work are carried out on our products or parts are replaced or our products are used contrary to the contractually stipulated suitability. The same applies if the purchaser, in a manner that is not transparent to us, joins, mixes or processes our products, contrary to their normal and/or usual suitability, with his products or products of third parties, or uses our products contrary to the state of science and technology, or in any other manner contrary to their normal and/or usual suitability.

8.3. Technical data on our products in offers, catalogues and other product descriptions has been determined by us in a suitable test environment (we will be happy to provide information on request) and represents the sole basis for agreed quality. Testing for suitability for the purpose intended by the Customer or for the use of the part under specific usage conditions is the responsibility of the Customer; we do not provide any kind of guarantee.

8.4. Subsequent performance does not include the removal of the defective item or its re-installation if we were not originally obliged to install it.

8.5. Deviating from Art. VIII 8 and 9 of GL, we shall bear or reimburse the expenses necessary for the purpose of inspection and subsequent performance, in particular transport, travel, labour and material costs as well as, if applicable, dismantling and installation costs in accordance with the statutory provisions, if a defect actually exists. Otherwise, we may demand compensation from the buyer for the costs (in particular testing and transport costs) incurred as a result of the unjustified request to remedy the defect, unless the buyer was unable to recognise the lack of defectiveness. No. 8.1 remains unaffected.

9. Use of the b@home system

The Terms of Use available on our website at www.alre.de apply for the use of the b@home portal and the b@home app including the updates ('b@home system'), which are made available to the Customer by us. Should the Customer use the b@home system for a company, he accepts the validity of these terms of use in a legally binding manner for this company.

Safety regulations

When handling products, the applicable EU Directives and the assembly and installation instructions in the operating manuals must be followed without fail.

Notes on the technical data

Technical data has been determined by us in a suitable test environment (we will be happy to provide information on request) and represents the sole basis for agreed quality. All the equipment and components shown in this catalogue may only be used in keeping with their intended purpose. Testing for suitability for the purpose intended by the Customer/client or for the use of the part under specific usage conditions is the responsibility of the Customer/client; we do not provide any kind of guarantee.

We reserve the right to make changes to products and documentation as may be required for technical progress and continuous improvement and therefore, there may be deviations from the information in the catalogue. Printing errors excepted.

Any reproduction of this documentation, even in extract form, is not permitted without the consent of ALRE-IT Regeltechnik GmbH, Berlin.

The place of jurisdiction is Berlin.

This price list is valid from 01/01/2020. This price list supersedes all previous price lists and renders them invalid.

We reserve the right to make changes.

General notes

REACH, RoHS, WEEE

REACH: The company ALRE-IT Regeltechnik exclusively sells non-chemical products (articles) from which no substance is released under normal and reasonably foreseeable conditions of use. The products of ALRE-IT Regeltechnik GmbH and their packaging comply with the permissible threshold values for substances on the candidate list according to Annex XVII of Regulation (EC) No. 1907/2006 ('REACH') and Regulation (EU) No. 1272/2013.

RoHS: As of 01/07/2013 the CE marking confirms that the respective products comply with the requirements of the RoHS 2011/65/EU and (EU) 2015/863 Directives.

WEEE: The company ALRE-IT Regeltechnik is registered as a manufacturer according to Section 3 (9) of the ElektroG (German Electricals Act) and under the registration number DE 58457361 at the EAR. All products manufactured by ALRE-IT Regeltechnik that fall within the scope of the ElektroG meet the legal requirements and thus ensure the proper collection, storage, recycling and environmentally friendly disposal of old equipment.

Product testing

For information on our declarations of conformity and various product tests, please visit our website at www.alre.de.

Company headquarters

ALRE-IT Regeltechnik GmbH
Richard-Tauber-Damm 10
12277 Berlin, Germany
Tel.: +49 (0) 30 399 84-0
Fax: +49 (0) 30 391 7005
E-mail: mail@alre.de
Internet: www.alre.de

Sales management

Klaus Lorenz
E-mail: Lorenz.Klaus@alre.de
Office
Tel.: +49 (0) 30 399 84-160
Fax: +49 (0) 30 399 84-129
E-mail: vertrieb@alre.de

Northern Region

German postal code zones
02, 03, 1, 2, 30, 31, 38, 39
Internal contact
Tel.: +49 (0) 30 399 84-127
Fax: +49 (0) 30 391 7005
E-mail: vertrieb@alre.de

Western Region

German postal code zones
32-35, 360 -363, 365-37, 4,
50-53, 57-61, 657-659
Internal contact
Tel.: +49 (0) 30 399 84-122
Fax: +49 (0) 30 391 7005
E-mail: vertrieb@alre.de

Southwestern region

German postal code zones
54-56, 63, 64, 650-656, 66-69, 7
Internal contact
Tel.: +49 (0) 30 399 84-123
Fax: +49 (0) 30 391 7005
E-mail: vertrieb@alre.de

Southern region

German postal code zones
8
Internal contact
Tel.: +49 (0) 30 399 84-121
Fax: +49 (0) 30 391 7005
E-mail: vertrieb@alre.de

Southeastern region

German postal code zones
01, 04-09, 364, 9
Internal contact
Tel.: +49 (0) 30 399 84-123
Fax: +49 (0) 30 391 7005
E-mail: vertrieb@alre.de

Export

Internal contact
Tel.: +49 (0) 30 399 84-213
Fax: +49 (0) 30 391 7005
E-mail: vertrieb@alre.de

Sales partner in Russia



2A-Avtomatizaciya Ltd.
Volgogradskiy pr-kt 45, Office 607
109316 Moscow
Tel.: +7 (0) 495 98 89 25 7
E-mail: info@2ae.ru
Internet: www.2ae.ru



Thermo Trade Engineering
Bumaznaya str. 4
190020 St. Petersburg
Tel.: +7 (0) 812 33 25 44 7
E-mail: info@tt-ing.ru
Internet: www.tt-ing.ru

Sales partner in Estonia, Latvia, Lithuania, Russia



OLIL Ltd.
Khimki, Engelsa Street 7/15, Room 10
141402 Moscow
Tel.: +7 (0) 495 54 38 85 4
E-mail: ilja@olil.ru
Internet: www.olil.ru

Sales partner in Poland, Romania, Ukraine, Belarus



DACPOL Sp. z o.o.
ul. Pulawska 34
05-500 Piaseczno
Tel.: +48 (0) 227 03 51 00
Fax: +48 (0) 227 03 51 01
E-mail: dacpol@dacpol.eu
Internet: www.dacpol.eu

Sales partner in the Netherlands

betec controls
veldapparatuur
voor Mensen en Dieren
Betec Controls BV
Radeweg 25a
8171 MD Vaassen
Tel.: +31 (0) 578 57 71 79
Fax: +31 (0) 578 57 79 82
E-mail: info@beteccontrols.nl
Internet: www.beteccontrols.nl

Sales partner in France

DISIMPEX
DISTRIBUTION IMPORT-EXPORT
DISIMPEX SA
14, rue Joseph Graff
67810 Holtzheim
Tel.: +33 (0) 390 20 74 20
Fax: +33 (0) 388 76 90 83
E-mail: info@disimpex.fr
Internet: www.disimpex.com

Sales partner in Austria

eh-technik

eh-technik
Reinbacher Ges.m.b.H. & Co KG
Gniglerstrasse 54
5020 Salzburg
Tel.: +43 (0) 662 87 00 53
Fax: +43 (0) 662 87 00 53 20
E-mail: office@eh-technik.at
Internet: www.eh-technik.at

Sales partner in Sweden



BONAB AB
Aröds Industriväg 76
42243 Hisings Backa
Tel.: +46 (0) 317 24 24 24
E-mail: alre@bonab.se
Internet: www.bonab.se

Sales partner in Switzerland

sensortec
sensortec AG
Bahnhofstrasse 87
3232 Ins
Tel.: +41 (0) 32 312 70 00
Fax: +41 (0) 32 312 70 09
E-mail: info@sensortec.ch
Internet: www.sensortec.ch

Sales partner in the United Arab Emirates

KENYARD
Brighter future
Kenyard Distributors LLC
Controller Division
PO BOX 231400
Dubai
Tel.: +971 50 684 9976
E-mail: faisal@kenyardgroup.ae
Internet: www.kenyardgroup.ae

Sales partner in Iceland

LOFT & RAFTÆKI
Loft og Raftæki ehf.
Hjallabrekka 1
200 Kópavogur
Iceland
Tel.: +354 564-3000
E-mail: loft@loft.is
Internet: www.loft.is

Sales partner in China



Hefei Heating-Cooling
Equipment Control Technology Ltd
Level-7, Block-D, Building-3#,
Hefei Xinglu Industrial Park
Luyang District
230001 Hefei
Tel.: +86 (0) 551 656 33 19 0
Fax: +86 (0) 551 656 33 19 7
E-mail: 443231605@qq.com
Contact person: Panpan Li



DBK-Technology Ltd.
Room 10, 3/F, Po Hong Centre
2 Wang Tung Street
Kowloon Bay
Hong Kong
Tel.: +852 (0) 2401 1011
Fax: +852 (0) 2401 7202
E-mail: info@dbk-tech.com
Internet: www.dbk-group.com
Internet: www.dbk-cn.com

DBK Industrial Equipment
(Chongqing) Co. Ltd.
Room 5-4, Unit 1, Block 16
No. 18 Qixia Road
Northern New District
Chongqing
P.R. China 401122
Tel.: +86 (0) 23-6342 2511
E-mail: info-cn@dbk-group.com
Internet: www.dbk-cn.com

Sales partner in Lithuania



AUREGIS UAB
Savanoriu pr. 271
50131 Kaunas
Lithuania
Tel.: +370 37 313 426
Internet: www.auregis.lt



alre

ALRE-IT Regeltechnik GmbH
Richard-Tauber-Damm 10
12277 Berlin, Germany

Phone: +49 (0) 30 399 84 0
Fax: +49 (0) 30 391 70 05
Internet: www.alre.de
E-mail: mail@alre.de